



CMK系列快速接线端子

CMK SERIES PUSH IN QUICK-CONNECTORS

Material of connectors shell: Transparent polycarbonate

Material of conductive parts: Thinned copper

Material of contact springs: AISI 301 stainless steel

Rated voltage(V): 450V AC

Rated current(A): 24A

Connection capacity: 0.5-2.5mm²


Type of electric connection: Equipotential

Working temperature: -40°C to 85°C


Strip length: 11mm/0.43 Inch




Product Code	Connector type	No. of circuits	Rigid wire mm ²	Volt (V)	Ampere (A)	Un	Un
CMK-202		2	0.5→2.5	450 V	24 A	150	9000
CMK-203		3				100	6000
CMK-204		4				100	6000
CMK-205		5				100	6000
CMK-206		6				50	3000
CMK-208		8				50	3000




CMK-202




CMK-203

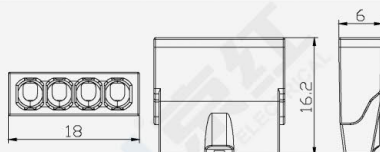


CMK-204

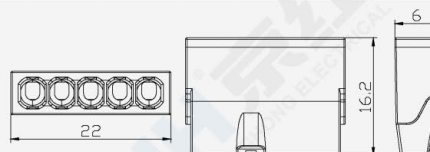

CMK-205

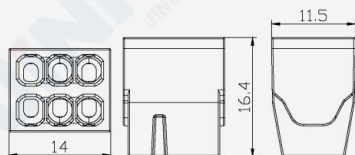

CMK-206

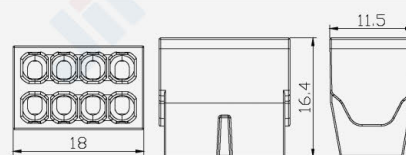

CMK-208