



JHPC系列接线端子
JHPC SERIES END TERMINAL BLOCKS

△Material:

Material of connectors casing/shell: Transparent polycarbonate
brass,screw is Iron plated zinc
Voltage: 250~450V
Color:Natural color as standard
Working temperature: 105°C



Product Code	Pole	Pole	Wire section (mm ²)	Current (A)	Voltage (V)	Plastic material
JH-1.5	5Pole	10Pole	1.5mm ²	17.5A	450V	PC
JH-2.5			2.5mm ²	24A		
JH-4			4mm ²	32A		
JH-6			6mm ²	41A	500V	
JH-10			10mm ²	57A		
JH-16			16mm ²	76A		
JH-25	1Pole	1Pole	25mm ²	101A		
JH-35			35mm ²	135A		





JHPC-1



JHPC-2



Product Code	Wire Range	Rated Voltage	L	W	H	h	Φ	Screw size	Plastic material	Packing		Packing pcs/Jar
										pcs/bag	pcs/ctn	
JHPC-1	6mm ²	450V	12.0	19.6	23	14.0	5.8	M4.0	PC	100	5000	100
JHPC-2				27								



Product Code	Wire Range	Rated Voltage	Pole	L	W	H	h	E	Φ	Screw size	Plastic material	Packing	
												pcs/bag	pcs/ctn
JH003-2	1.5mm ²	450V	2Pole	12	15	14.2	8	4.6	3.5	M3	PC	50	3000
JH003-3			3Pole	19.5	14.2	16.6	9.5	5					2000
JH003-4			4Pole	23.5	14.2	17	9.5	5					1000



JHPC系列接线端子
JHPC SERIES END TERMINAL BLOCKS

△Material:

Material of connectors casing/shell: Transparent polycarbonate aluminum , screw is brass

Voltage: 250~450V

Color:Natural color as standard

Working temperature: 105°C

Product Code	Connector type	No.of circuits	Cross section (AL) mm ²	Cross section(Cu) mm ²	Diametre mm ²	Current
JH10.1		4	10-35	1.5-25	1.7-9.0	130A
JH10.3		6	10-35	1.5-25	1.7-9.0	130A
JH10.504		4	10-50	2.5-35	2.0-10.2	165A
JH10.506		6	10-35	2.5-35	2.0-10.2	165A



10.1



10.3



10.504



10.506



KE box

JH系列塑料端子
PLASTIC TERMINALS


Terminal Blocks H,U(W),V(F) type

Material: Made from PA, PE or PP

△External dimension
Connection material: Copper




U Type




Product Code	mm ²	Amp	Volt	L	W	H	Type
JH010	4	3A	380V	91	15	12	U/H
JH011	6	6A		106	15	13	
JH021	10	10A		125	20	15	
JH022	12	16A		132	21.3	17	
JH014	14	20A		143	22	17.8	
JH023	16	30A		155	24	19	
JH018	25	60A		187	30	25.5	
JH026	35	80A		206	32.5	27	
JH027	40	100A		230	37	30	
JH028	60	150A		255	44	35	

△External dimension
Connection material: Zinc alloy

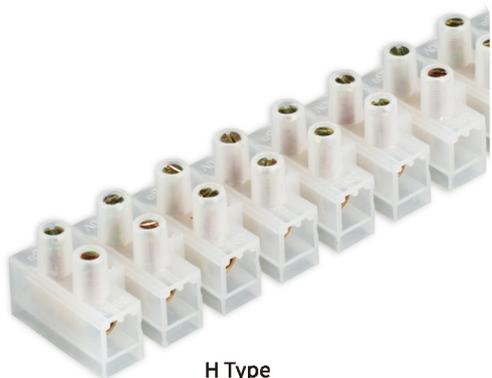


H Type



Product Code	mm ²	Amp	Volt	L	W	H	Type
JH041	4	3A	380V	91	15	12	U/H
JH042	6	5A		106	15	13	
JH043	10	10A		112	17.8	14	
JH044	12	16A		137	19.5	17	
JH045	16	30A		162	23.8	18.3	
JH046	25	60A		186	26	22.5	
JH047	35	80A		205.5	32.5	27	
JH048	40	100A		223	36	32.5	H
JH049	60	150A		254	44	35	

△Material:
-PE, Polyethylene,
Working Temperature: -40°C~65°C;
-PP, Polypropylene,
Working Temperature: -20°C~90°C;
-PA, Polyamide 66,
Working Temperature: -30°C~85°C;

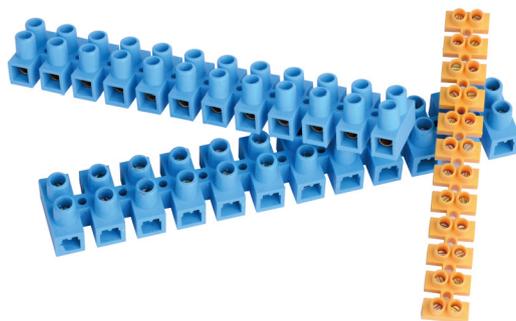

JH系列塑料端子
PLASTIC TERMINALS

Terminal Blocks H、U(W)、V(F) type

Material: Made from PA,PE or PP

Color: Red ,Yellow,Green ,Blue


△External dimension

Product Code	mm ²	Amp	Volt	L	W	H	Type
JH003	10	10A	380V	128	18	14.5	U/H
JH015	12	15A		132.5	19.5	16	U
JH004	14	20A		137	19.5	17	U/H
JH005	16	30A		163	22	18.5	
JH006	25	60A		186	26	22.5	



△External dimension

Product Code	mm ²	Amp	Volt	L	W	H	Type
JH012	10	10A	380V	110.6	17.7	13.7	H
JH020	10	10A		119.5	19	16	H
JH014	14	20A		136	21.3	16.6	U/H
JH017	16	30A		162	23.8	18.3	U/H
JH025	25	60A		191	30	25	U/H

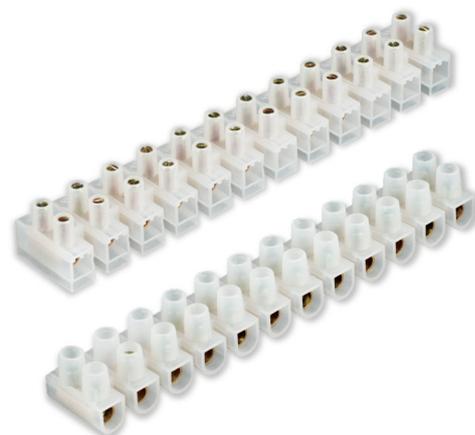

△External dimension

Product Code	mm ²	Amp	Volt	L	W	H	Type
JH030	4	3A	250V	93.3	15.7	12.8	U
JH031	6	6A		106.8	18.2	14.8	
JH032	10	10A		133.5	21	17.7	
JH033	16	30A		153.5	24.2	23	
JH034	25	60A		211	32	28	
JH035	4	3A	450V	93.3	15.5	13.5	
JH036	6	6A		105.5	17.8	15	
JH037	10	10A		133.8	20.8	17.8	
JH038	16	30A		153	24	23.2	
JH039	25	60A		214	33	29	



2/3 POLES CONNECTOR

Product Code	mm ²	Volt/Pole	L	W	H	h	E	e
CMK1002	6	380V/2P	15.7	18.6	15.2	8.5	12.3	6.6
CMK1003		380V/3P	25.5					

