



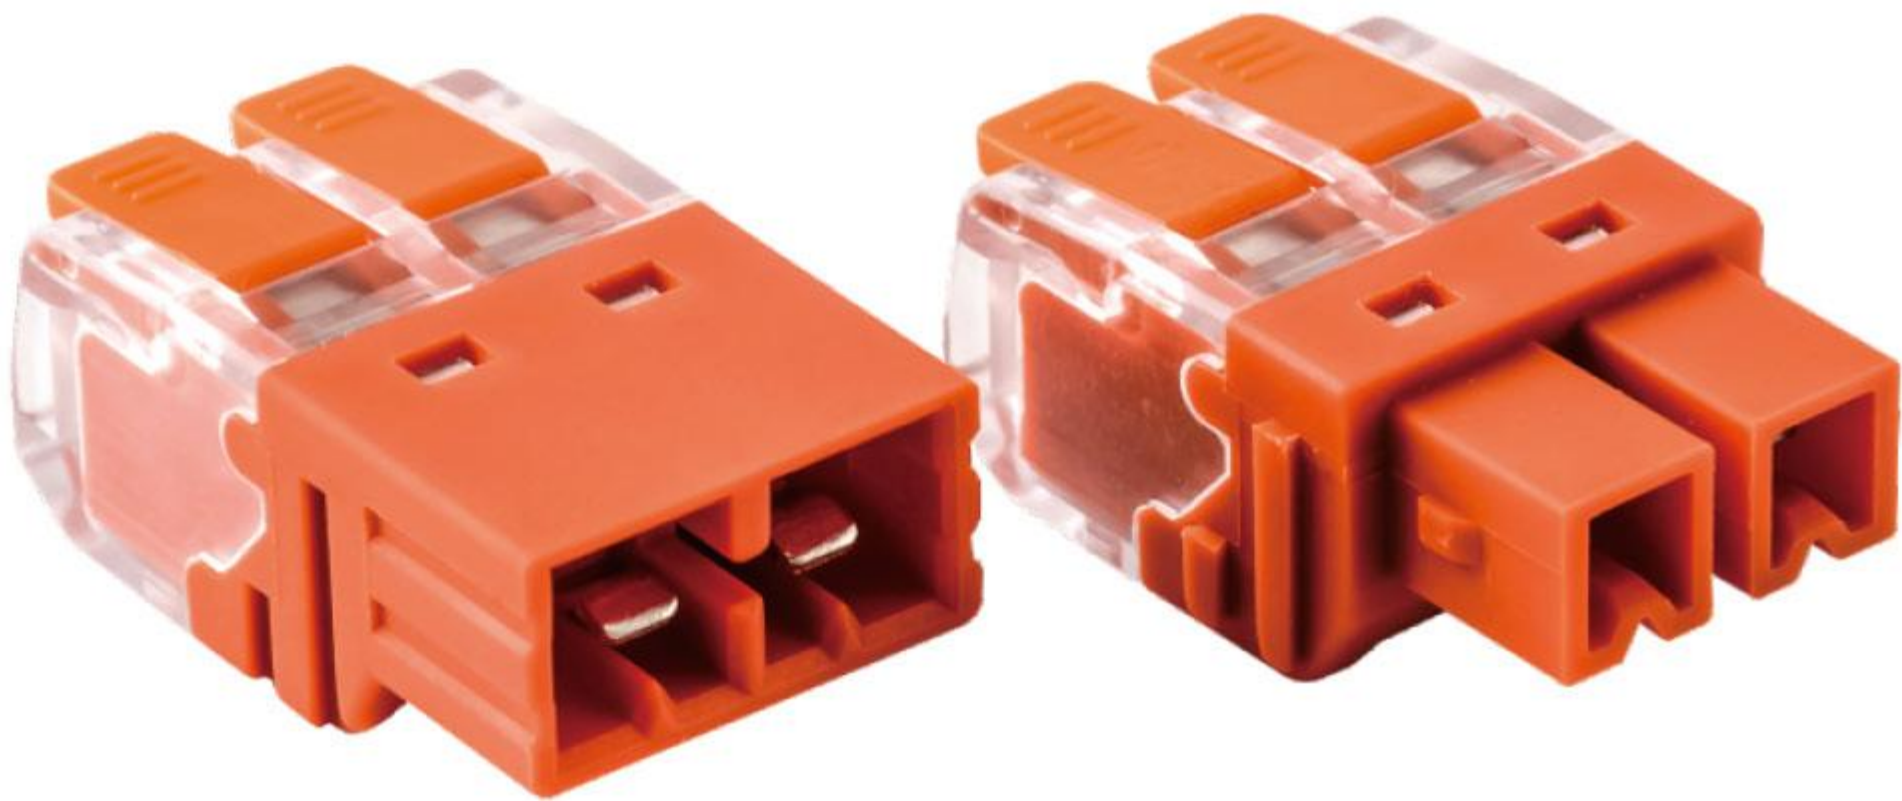

CMK系列快速接线端子
CMK SERIES PUSH IN QUICK-CONNECTORS

Material of connectors shell: Polycarbonate PC
Material of actuating levers: Polyamide Pa66
Material of conductive parts: Thinned copper
Material of contact springs: AISI 301 stainless steel
Rated voltage(V): 450V AC
Rated current(A): 24A
Type of electric connection: Equipotential
Working temperature: -40℃ to 105℃
Strip length: 11mm/0.43 Inch



Product Code	Connector type	No.of circuits	Flexible wire mm ²	Rigid wire mm ²	Volt (V)	Ampere (A)	 Un	 Un
CMK-642		4	0.2-1.5	0.2-2.5	450V	24A	50	2000
CMK-643		6					40	1600



CMK-651



CMK-652



CMK-653

Product Code	Connector type	No.of circuits	Flexible wire mm ²	Rigid wire mm ²	Volt (V)	Ampere (A)	 Un	 Un
CMK-651		2	0.2-1.5	0.2-2.5	450V	24A	100	3000
CMK-652		4					50	2000
CMK-653		6					50	2000