

JHUK系列通用接线端子

JHUK SERIES UNIVERSAL TERMINAL BLOCKS

△概述 General

JHUK 系列组合端子排采用框式螺钉接线结构，设计符合 IEC60947-1、GB14048 等标准，产品用于交流 50Hz(60Hz)，额定电压 660V、直流 440V 以下电路额定截面为 0.75~150mm² 的连接导线，也适用于未经过特殊加工或压接管状端头的圆铜导线连接之用。



JHUK series combined terminal row adopts frame type screw connection structure. The design complies with IEC60947-1, GB14048 standards, which is widely used in the circuit of AC 50Hz(60Hz), rated voltage 660V, DC 40V and below, rated sectional area is 0.75~150mm² connection conductor, it also is suitable for connecting the circle copper conductor of tube terminal that is not specially processed or pressure welding.

△特点 Characteristics


- 1、安装结构设计合理、通用性强，G(┐)型和TH(┐)型导轨上都能使用，50mm²以下采用加固附件安装。
- 2、体积小、规格全、可连接导线截面大，导电性好，50mm²以下采用铜制压线框与铜制紧固螺钉，50mm²以上采用钢制压线框与钢螺钉及铜制导流板，拧紧力矩大同时具有自锁功能。
- 3、组合功能强，使导体的连接变得更加简单。
- 1、Reasonable installation structure design, wide general-purpose nature, can be used both G type and TH type guide rail. If it is above 50mm², adopts fasten accessory installation.
- 2、Small volume, complete set of specification, big connected conductor sectional area and good electrical conductivity, the one that is below 50mm² adopts copper press line frame and copper fasten screw; and the one that is above 50mm² adopts copper press line frame and steel screw and copper skirt plate. It has big tighten moment and self-locking function.
- 3、The strong combined function makes the connection of conductor be simpler.

△说明 Explain

(1)端板End cover: 厚度Thickness 1.5mm ² 灰色grey	
(2)中心联接条10, 可任意分割2位3位 10 Center connection-strips, can be divided into 2 position or 3 position.	
(3)带绝缘垫块桥接件: 10位; 可分; 需垫入 Isolator bridge bar: 10-position, divisible need cushion block.	
(4)两端子开关桥: 全套, 需在两端子之间加入板端 Switch bar for 2 terminal blocks complete, add end cover between two terminals.	
(5)隔片: 用于联接件间的电气隔离用 Separating plate: be used for electrical separation of neighbouring brodges.	
(6)分组隔板: 厚度1.5mm Partition plate: 1.5mm Thickness	
(7)通用终端固定件 Unviersal end fixed piece.	

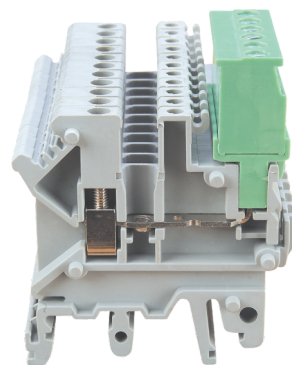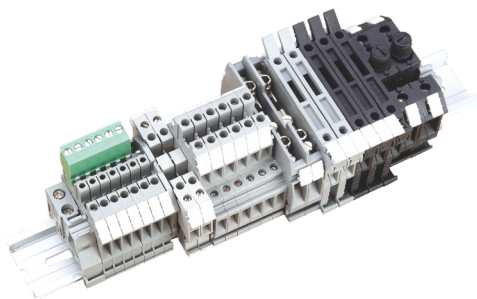


JHUKJ-2.5V

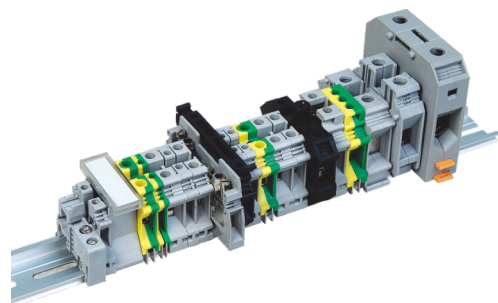

JHUK系列通用接线端子

JHUK SERIES UNIVERSAL TERMINAL BLOCKS



JHUK1.5N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-1.5
电流current: 32A 电压voltage: 690V

D-UK1.5



Fb1 10-4




ZB3



TS-K



E/UK



JHUK2.5B

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-2.5
电流current: 32A 电压voltage: 690V

D-UK2.5



FB1 10-6




ZB6



TS-K



E/UK



JHUK3N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-2.5
电流current: 32A 电压voltage: 800V

D-UK4/10



FB1 10-5




ZB5



TS-K



E/UK



JHUK5N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-6 0.2-4
电流current: 41A 电压voltage: 800V

D-UK4/10



FB1 10-6




ZB6



TS-K



E/UK



JHUK6N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-10 0.2-6
电流current: 57A 电压voltage: 800V

D-UK4/10



Fb1 10-8




ZB8



TS-K



E/UK




JHUK10N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.5-16 0.5-10
电流current: 76A 电压voltage: 800V

D-UK4/10



FB1 10-10




ZB10



TS-K



E/UK



JHUK16N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
2.5-25 4-16
电流current: 101A 电压voltage: 800V

D-UK16



FB1 10-16




ZB6*2



TS-K



E/UK



JHUK25N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
2.5-35 4-25
电流current: 100A 电压voltage: 800V

D-UK25



Fb1 10-25



ZB6*2



TS-K







E/UK



JHUK系列通用接线端子


JHUK SERIES UNIVERSAL TERMINAL BLOCKS




JHUK35

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
10-35 10-35
电流current: 125A 电压voltage: 800V

FB1 10-35



ZB8*2



E/UK
终端固定件



JHUKH50

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
16-50 25-50
电流current: 150A 电压voltage: 1000V

FB1 12-20 (FB1 12-20)
FB13-20 (FB13-20)

(1)边插式短接件, 2 位
全绝缘, 插入端 3 位
子夹线体并嵌装 3 位
在端子外壳上

铝合金 E/AL-NS 35

(2)终端固定件: 用于JHUK50和70
和95和150型端子终端固定。

JHUK70

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
25-70 35-70
电流current: 192A 电压voltage: 1000V

FB1 12-20 (FB1 12-20)
FB13-20 (FB13-20)

(1)边插式短接件, 2 位
全绝缘, 插入端 3 位
子夹线体并嵌装 3 位
在端子外壳上

铝合金 E/AL-NS 35

(2)终端固定件: 用于JHUK50和70
和95和150型端子终端固定。

JHUK95

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
25-95 35-95
电流current: 232A 电压voltage: 1000V

FB1 12-20 (FB1 12-20)
FB13-20 (FB13-20)





(1)边插式短接件, 2 位
全绝缘, 插入端 3 位
子夹线体并嵌装 3 位
在端子外壳上

铝合金 E/AL-NS 35

(2)终端固定件: 用于JHUK50和70
和95和150型端子终端固定。

JHUK系列通用接地端子

JHUK SERIES CURRENTY EARTHING TERMINAL



JHUSLKG 2.5

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-2.5
电流current: 32A

JHUSLKG 3





刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-2.5
电流current: 32A

JHUSLKG 5

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-4
电流current: 34A

JHUSLKG 6

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-10 0.2-6
电流current: 57A



JHUSLKG 10

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.5-16 0.5-10
电流current: 76A

JHUSLKG 16

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
2.5-25 4-16
电流current: 101A

JHUSLKG 35


刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
10-35 10-35
电流current: 125A

JHUSLKG 50

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
25-50 16-50
电流current: 150A 电压voltage: 1000V


JHUK系列通用接线端子

JHUK SERIES UNIVERSAL TERMINAL BLOCKS




JHUK150

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
35-150 50-150
电压voltage: 1000V 电流current: 309A




JH2UIK35

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
10-35 0.2-6
电流current: 125A 电压voltage: 800V




JH2USLKG 35

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
10-35 10-35
电流current: 125A



JHUKK 2.5

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-2.5
电流current: 24A 电压voltage: 500V




JHUKK 5

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-6 0.2-4
电流current: 41A 电压voltage: 500V

D-UKK5



FB10-6




JHUKK 5B

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-6 0.2-4
电流current: 41A 电压voltage: 500V

D-UKK5B



FB10-6




JHUDK 4

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-2.5
电流current: 32A 电压voltage: 690V

D-UDK4



FB10-6



JHURTK/S

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.5-10 0.5-6
电流current: 41A 电压voltage: 400V

D-URTK/S




FB/URTK



JHUDK 5-HESI

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-4
电流current: 6.3A 电压voltage: 800V



JHUK 10-DREHSI (UK 10-DREHSI)

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.5-16 0.5-16
电流current: 10A 电压voltage: 800V



JHUBE/D

宽度(weid): 15mm



JHB1

宽度(weid): 10mm



EUK/B