

SAK/JXB 系列组合接线端子

SAK/JXB SERIES COMBINED TERMINAL BLOCKS

△概述 General

SAK/JXB系列组合端子主要是根据德国魏德米勒的联接技术，国内设计制造。技术指标符合IEC60947-1、IEC60947-7-1、GB14048.1标准。其中JXB用于G型和TH导轨的固定安装，增加了大电流端子系列。

SAK/JXB series combined terminal blocks mainly use Germany Woodmiller's connection technology, designed by ourselves and made domestic. Technology targets conforms the standard IEC6094-7-1, OEC 60947-7-1, and GB14048.1. Moreover, JXB Series terminals belong to high current terminals, and they are used in G type and TH type Din Rails.

△特点 Characteristics

- 1、安装设计合理、通用性强，SAK型固定安装G型和TH导轨上都能使用。
- 2、体积小、规格全、JXB系列大电流端子50mm²以上采用加固附件安装钢制压线框和线形导流板技术保证接触可靠。
- 3、基型座颜色采用米黄色和灰色，接地座采用黄绿双色，更具有时代感。
- 1、 Reasonable installing design, strong versatility, SAK type can be mounted on the guide of Gand TH type.
- 2、 Small volume, full specification, series JXB's big current terminal use reinforced accessoriesto install steel pressing-wire frame and wire diversion board technology in order to ensure the contact reliable.
- 3、 The stand uses creamed-yellow and grey color, the connecting-ground pedestal uses yellow and green color with more modern sense.

△说明 Explain

(1)端板(AP): 厚1.5mm 灰色 米色 灰色grey
end voltage/thick1.5mm, grey or cream-color





(2)中心联接件: 10位, 可分2位, 3位, 4位
Center connection piece:10 position,
can be divided into 2, 3 or 4position.




(3)通用终端固定件
Universal end fixed piece



(4)印字连续标记条
Printing number continuous mark stripe

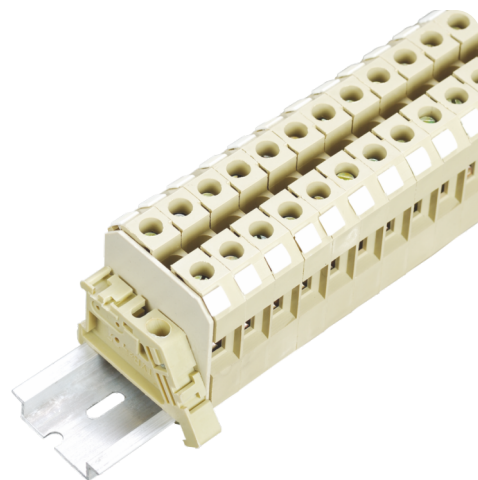


SAK series

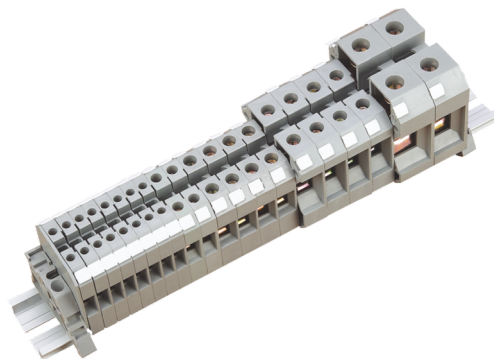

JXB series

SAK 系列组合接线端子


SAK SERIES COMBINED TERMINAL BLOCKS



SAK 2.5EN

0.2-2.5mm²
电流current:24A 电压voltage: 800V
2.5EN
Q2位, 3位, 10位 (2.5Q 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 4EN

0.2-4mm²
电流current:32A 电压voltage: 800V
4EN
Q2位, 3位, 10位 (4ENQ 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 6EN

0.2-6mm²
电流current:41A 电压voltage: 800V
6EN
Q2位, 3位, 10位 (6ENQ 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 10EN

0.2-10mm²
电流current:57A 电压voltage: 800V
10EN
Q2位, 3位, 10位 (10ENQ 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 16EN

0.5-16mm²
电流current:76A 电压voltage: 800V
16EN
Q2位, 3位, 10位 (16ENQ 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 25EN

0.5-25mm²
电流current:100A 电压voltage: 800V
16EN
Q2位, 3位, 10位 (16ENQ 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 35EN

10-35mm²
电流current:125A 电压voltage: 800V
35EN
2位, 3位, 10位 (35ENQ 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 70/35EN

25-70mm²
电流current:192A 电压voltage: 800V
70Q 2位, 3位 (70Q 2位, 3位)
EW35


连续印字 (DEK5(1...10))



SAK RD

0.2-4mm²
电流current:6.3A 电压voltage: 500V
10EN
Q2位, 3位, 10位 (10Q 2-10)
EW35


连续印字 (DEK5(1...10))



DK 4Q/35

0.2-4mm²
电流current:32A 电压voltage: 500V
DK4Q
Q2位, 3位, 10位 (DK4Q 2-10)
EW35

连续印字 (DEK5(1...10))




SAK WTL 6/1

0.2-4mm²
电流current:41A 电压voltage: 400V
WTL2-10位
2位, 3位, 4位, 10位 (WTKQ2-10位)
EW35

连续印字 (DEK5(1...10))

JXB 系列组合接线端子

JXB SERIES COMBINED TERMINAL BLOCKS




通用型universal type 厚度thickness:6.2

JXB 2.5/35 Grey

0.2-2.5mm²
电流current:24A 电压voltage: 800V
2.5EN
Q2位, 3位, 10位 (2.5Q 2-10)
EW35

连续印字 (DEK5(1...10))




通用型universal type 厚度thickness:6.2

JXB 4/35 Grey

0.2-4mm²
电流current:32A 电压voltage: 800V
4EN
Q2位, 3位, 10位 (4ENQ 2-10)
EW35

连续印字 (DEK5(1...10))




通用型universal type 厚度thickness:8

JXB 6/35 Grey

0.2-6mm²
电流current:41A 电压voltage: 800V
6EN
Q2位, 3位, 10位 (6ENQ 2-10)
EW35

连续印字 (DEK5(1...10))




通用型universal type 厚度thickness:10

JXB 10/35 Grey

0.2-10mm²
电流current:57A 电压voltage: 800V
10EN
Q2位, 3位, 10位 (10ENQ 2-10)
EW35

连续印字 (DEK5(1...10))




通用型universal type 厚度thickness:12

JXB 16/35 Grey

0.5-16mm²
电流current:76A 电压voltage: 800V
16EN
Q2位, 3位, 10位 (16ENQ 2-10)
EW35

连续印字 (DEK5(1...10))




通用型universal type 厚度thickness:14.5

JXB 25/35 Grey

0.5-25mm²
电流current:100A 电压voltage: 800V
16EN
Q2位, 3位, 10位 (16ENQ 2-10)
EW35

连续印字 (DEK5(1...10))




通用型universal type 厚度thickness:18

JXB 35/35 Grey

10-35mm²
电流current:125A 电压voltage: 800V
35EN
2位, 3位, 10位 (35ENQ 2-10)
EW35

连续印字 (DEK5(1...10))



通用型universal type 厚度thickness:22

JXB 70/35 Grey


25-70mm²
电流current:192A 电压voltage: 800V
70Q
2位, 3位 (70Q 2位, 3位)
EW35

连续印字 (DEK5(1...10))




JXB 2.5-35 mm²

颜色 Color Green




JXB 2.5-35 mm²

颜色 Color Blue



JXB 2.5-35 mm²

颜色 Color Yellow



JXB 2.5-35 mm²







颜色 Color Red

SAK/JXB系列通用接地端子

SAK/JXB SERIES CONNECTING-GROUND TERMINAL BLOCKS

通用接地端子 UNIVERSAL TERMINAL blocks

·技术参数：额定横截面 Technical parameter: rated section ·颜色：黄绿色 Colour: yellow and green

 <p>40 接地端子 58 connecting ground terminal 厚度thickness:18</p> <p>EK2.5/35 0.2-2.5mm²</p>	 <p>44 接地端子 58 connecting ground terminal 厚度thickness:7</p> <p>EK4/35 0.2-4mm²</p>	 <p>44 接地端子 58 connecting ground terminal 厚度thickness:8</p> <p>EK6/35 0.2-6mm²</p>
 <p>44 接地端子 58 connecting ground terminal 厚度thickness:10</p> <p>EK10/35 0.5-10mm²</p>	 <p>50 接地端子 58 connecting ground terminal 厚度thickness:12</p> <p>EK16/35 0.5-16mm²</p>	 <p>50 接地端子 58 connecting ground terminal 厚度thickness:12</p> <p>EK35/35 0.5-35mm²</p>

SAK系列端子附件 SAK SERIES TERMINALS ATTALHMENT

 <p>AP2.5</p>	 <p>AP4/10</p>	 <p>AP16</p>	 <p>AP35</p>
 <p>FP1-2.5</p>	 <p>FP1-4</p>	 <p>FP1-6</p>	 <p>FP1-10</p>
 <p>FP1-16</p>	 <p>P2 P3</p>	 <p>JHEW-35</p>	 <p>标记座 厚度:9.5、19.5 mark stand thickness</p>
 <p>中心式短接件 center connection piece</p>	 <p>中心式短接件 center connection piece</p>	 <p>JHEW-35 end stopper</p>	 <p>SAK-B1、JXB-B1 Grey 印刷标记号连续号码 BP1 print mark' continuous Number BP1</p>