

本目录刊载的型号和规格会因产品更新变化，恕不另行通知
本目录虽经多次校对，以求准确，但仅供参考之用，一切以实物及产品说明为准



JiNH 京红
JINGHONG ELECTRICAL

heavy duty connectors industrial rectangular plug 重载连接器/工业矩形插

浙江京红电器有限公司
ZHEJIANG JINGHONG ELECTRIC CO.,LTD.

地址(Add): 浙江省乐清市经济开发区
Yueqing economic&development zone,Zhejiang,China
电话(Tel): 0086-577-62756761
传真(Fax): 0086-577-62706812
手机(Mobil): (86) 15058972333
Http://www.cnjhele.com
E-mail:jhele@cnjhele.com



如何订购	01
产品选型指南	02-03
导线压接类型总览	04
常用套件组合	05-11
接插体 HA、HE 系列	12
接插体 HEE 系列	13
接插体 HD 系列	14
接插体 HDD 系列	15
接插体 HEAV、HSB、HWK 系列	16
接插体 HK、HQ 系列	17
HM 模块型技术特性	18-22
冷压针及对应工具	23
附件	24
3A 外壳	25
10A 外壳	26
16A 外壳	27
32A 外壳	28
6B 外壳	29-30
10B 外壳	31-33
16B 外壳	34-36
24B 外壳	37-39
32B 外壳	40-41
48B 外壳	42
电缆接头	43
电缆密封接头(尼龙)	44
电缆密封接头(黄铜镀镍)	45


如何订购 How to order

订购接插件的步骤如下 For a complete connector components may be order from the following sub headings

- 接插体公插**
公插接线形式有：螺钉压接、冷压针压接（冷压针需要单独订购）和弹片压接形式。
- 接插体母插**
母插接线形式有：螺钉压接、冷压针压接（冷压针需要单独订购）和弹片压接形式。
- 防护外壳上壳**
外壳上壳形式有：低或高结构、侧面或顶部出线、2耳或4耳、单扣或双扣形式。
- 底座**
开孔安装底座：带或不带保护盖、单扣或双扣形式。
表面安装底座：低结构或高结构、带或不带保护盖、2或4耳、单扣或双扣、1个或2个出线孔形式。
- 电缆进线保护**
带单层或多层密封圈的平口接头
金属或塑料电缆接头
特殊电缆保护附件
- 其它附件**
各种类型的金属及塑料保护盖、编码销、导柜安装框架。

- Male insert**
Male insert with screw terminal, crimp terminal (order contactsseparately) or cage-clamp terminal.
- Female insert**
Female insert with screw terminal, crimp terminal (order contactsseparately) or cage-clamp terminal.
- Hoods**
Hoods with low or high construction, side or top cable entry, 2 or 4 bolts, 1 or 2 locking levers.
- Housings**
Bulkhead mounting housings with or without protection cover, 1 or 2 locking levers.
Surface mounting housings with low or high construction, with or without protection cover, 2 or 4 bolts, 1 or 2 locking levers, 1 or 2 cable entries.
- Cable entry protection**
Cable glands with normal or multiple sealing.
Metal or plastic cable glands.
Special cable entry protection or extensive range of accessories.
- Accessories.**
Protection cover available, code and guide pins for coding. Inserts fixing screws for use without hoods and housings.

接插件安装示意图 Assembly details.

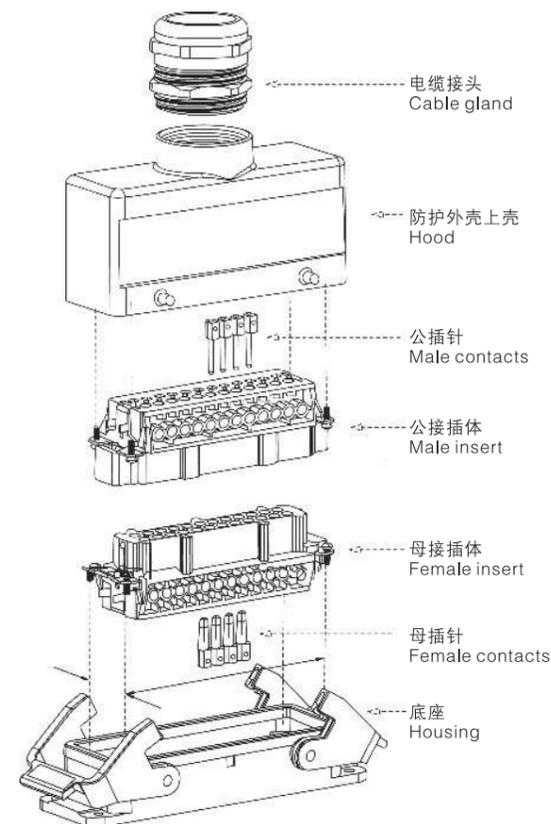

防护外壳型号说明 List of hoods and housings

- H24B - SGR - LB - PG21**
- PG21螺纹
PG21 Thread
 - 单扣
Single locking lever
 - 表面安装底座
Surface mounting housing
 - 系列
Series
- AG → 双扣，开孔底座
Bulkhead mounting housing
- AG-LB → 单，开孔底座
Bulkhead mounting housing with single locking lever
- AD-BO → 4耳，带盖开孔底座
Bulkhead mounting housing with cover, bolts
- AD-LB → 单扣，带盖开孔底座
Bulkhead mounting housing with cover, single locking lever
- SGR → 双扣，表面安装底座
Surface mounting housing
- SDR H → 高结构带盖表面安装底座
Surface mounting housing with cover
- TS → 4耳，侧出上壳
Side entry hood
- TS H → 4耳，高结构侧出上壳
High construction side entry hood
- TG → 4耳，顶出上壳
Top entry hood
- TG H → 4耳，高结构顶出上壳
High construction top entry hood
- TSB → 双扣，侧出上壳
Side entry, double locking lever hood
- TGB → 双扣，顶出上壳
Top entry, double locking lever hood
- TBF → 双扣，电缆对接下壳
Cable coupler hood



在选择接插件时，需确定
When selecting heavy duty connector,
we need to choose as follow

- ◆额定电压 / 电流
- ◆回路数 (接插件针数)
- ◆外壳形式 (防护外壳上壳及底座的选择)
- ◆附件 (主要为电缆接头的选择)
- ◆Rated voltage and current
- ◆Poles of connector
- ◆Choosing hood and housing type
- ◆Accessories(selecting cable gland)

重载接插件常用套件组合示意图如下 Set general overview

产品型号说明 Type explanation


例: HE-010-M 为 HE 系列的 10 针公接插体。
I.e.: HE-010-M means male insert of 10 poles in HE series.

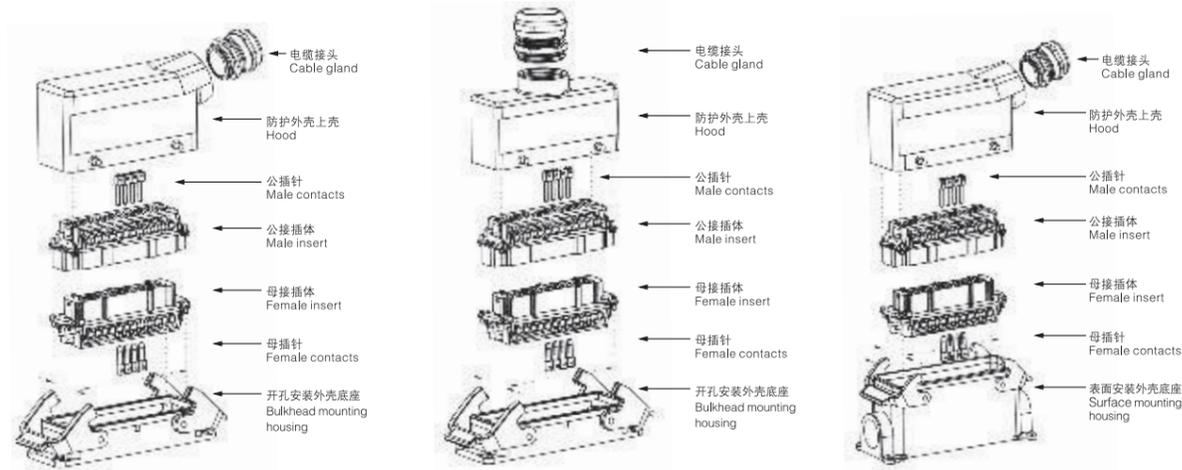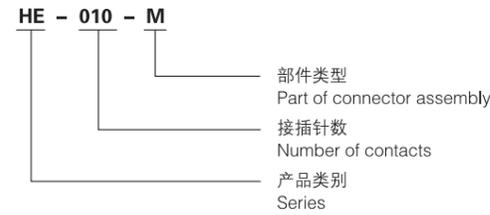

① 开孔安装，侧面进线形式
Bulkhead mounting and side entry type.

② 开孔安装，正面进线形式
Bulkhead mounting and top entry type.

③ 表面安装，正面进线形式
Surface mounting and side entry type.

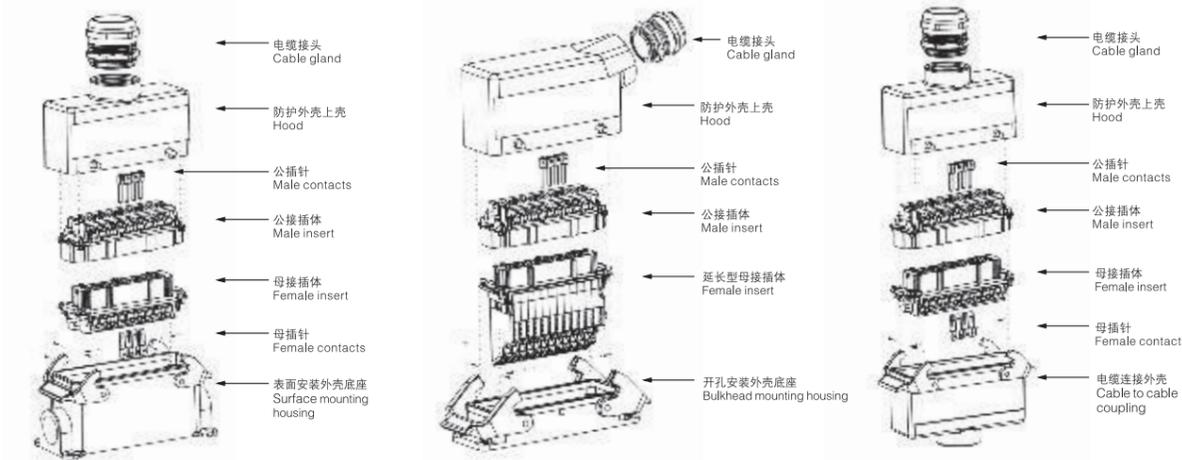

④ 表面安装，正面进线形式
Surface mounting and top entry type.

⑤ 穿孔安装，侧面进线形式
Through-panel connector and side entry type.

⑥ 电缆连接，正面进线形式
Cable to cable and top entry type.

注：以上所有规格均提供单扣形式。
All sets shown above with one lever types.


接插件针数及对应额定工作参数对照表 Overview: Rating VS. No. of poles

额定电压 /Rated voltage	250V	250V	400V	500V	500V	690V	690V	
额定电流 /Rated current	10A	16A	16A	16A	35A	80A	100A	
3	HA-003						HK4/0-012	
4	HA-004							
5			HQ-005					
6			HE-006		HSB-006		HK4/2-012	
7	HD-007		HQ-007					
8	HD-008							
10	HA-010		HE-010		HEE-010			
12					HSB-012		HK4/8-012	
15	HD-015							
16	HA-016		HE-016					
18					HEE-018			
24	HDD-024		HE-024					
25	HD-025							
32	HA-032		HE-032		HEE-032			
40	HD-040							
42	HDD-042							
46					HEE-046			
48			HE-048					
50	HD-050							
64	HD-064				HEE-064			
72	HDD-072							
80	HD-080							
92					HEE-092			
108	HDD-108							
128	HD-128							
144	HDD-144							
216	HDD-216							

接插件针数及对应额定工作参数对照表 Overview: Rating VS. No. of poles


防护外壳 /hood	接插体 /insert					
HA3 外壳 (金属)	HA-003/HA-004		HD-007/HD-008		HQ-005/HD-007	
HA3 外壳 (塑料)	HA-003/HA-004		HD-007/HD-008		HQ-005/HD-005	
HA10, EMC	HA-10		HD-015			
HA16, EMC	HA-16		HD-025			
HA32, EMC	HA-032(16X2)		HD-050(25X2)			
HB6, EMC	HE-006		HE-010		HDD-024	
HB10, EMC	HE-010		HE-018		HDD-42	
HB16, EMC	HE-016		HE-032		HDD-072	
HB24, EMC	HE-024		HE-046		HDD-108	
HB32, EMC	HE-032(16X2)		HE-064(32X2)		HDD-144(72X2)	
HB48, EMC	HE-048(24X2)		HE-092(46X2)		HDD-216(108X2)	
					HSB-006	HK4/0, HK4/2
						HK4/8, HK6/6

螺钉压接形式
Screw terminal
HA series
HE series
HSB series
HK series
HEAV series




接插芯 Inserts	最大线规 max.wire gauge		剥线长度 Stripping length L (mm ²)
	(mm ²)	AWG	
HA-003, HA-004	2.5	14	4.5
HE, HA, HEAV	2.5	14	7.5
HE	4.0	12	7.5
HSB	6.0	10	11.5
HK	16.0	5	14.0

冷压针压接形式
Crimp terminal
HD series
HDD series
HM series (10A)




接插芯 Inserts	线规 Wire gauge		剥线长度 Stripping length L (mm ²)	
	(mm ²)	AWG	HDD/HD	HEC/HAC
HD	0.5	20	8.0	7.5
	0.75	18	8.0	7.5
HDD	1.0	18	8.0	7.5
HM(10A)	1.5	16	8.0	7.5
	2.5	14	8.0	7.5
	4.0	12	—	7.5

HEE series
HM series (16A)



接插芯 Inserts	线规 Wire gauge		剥线长度 Stripping length L (mm ²)
	(mm ²)	AWG	HEE/HM(16A)
HEE	0.5	20	7.5
	0.75	18	7.5
HM(16A)	1.0	18	7.5
	1.5	16	7.5
	2.5	14	7.5
	4.0	12	7.5

弹片压接端子
Cage-clamp terminal
HES series
HEAVS series



接插芯 Inserts	最大线规 max.wire gauge		剥线长度 Stripping length
	(mm ²)	AWG	L (mm ²)
HES, HEAVS	0.14-2.5	26-14	9...11


产品特点 Product Feature

簧片式接线端子
Terminals With Wire Protection

在接线端子内设有弹簧片，以弹簧片压接电缆线，增加了压线面积，压线牢固，避免了螺钉压紧电缆裸线时容易扭断裸线的现象。
There is a spring inside the terminal, to enlarge the contact area and tighten the wire, which avoids the bare wires twisted and broken caused by the screw.

使用方法参见图表
For the use of them, see figures

螺纹端子
Threaded Terminal



常用套件组合 Set general introduction

HA 系列 3 回路接插件套件 HA Series 3 Poles of connector



HA-003-M HA-003-F

A B

注：A, B, C, D 为一套组件



HDC-HA-003-1
侧面进线 /side entry

HDC-HA-003-2
正面进线 /Top entry

HDC-HA-003-3
表面安装 /Surface mounted

HDC-HA-003-4
表面安装 /Surface mounted

HDC-HA-003-5
电缆对接 /Cable to cable

HA 系列 4 回路接插件套件 HA Series 4 Poles of connector



HA-004-M HA-004-F

A B

HA-004-M HA-004-F

注：A, B, C, D 为一套组件



HDC-HA-004-1
侧面进线 /side entry

HDC-HA-004-2
正面进线 /Top entry

HDC-HA-004-3
表面安装 /Surface mounted

HDC-HA-004-4
表面安装 /Surface mounted

HDC-HA-004-5
电缆对接 /Cable to cable

技术参数 Technical data

工作电流：10A
工作电压：230/250V
阻燃等级（据 UL94）：V0
防护等级：IP65
接线形式：螺钉压接
电缆入口可选螺纹：M20, PG11
Rated current: 10A
Rated voltage: 230/250V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Thread: M20, PG11

套件订货号 Order NO.

技术参数 Technical data

工作电流：10A
工作电压：230/250V
阻燃等级（据 UL94）：V0
防护等级：IP65
接线形式：螺钉压接
电缆入口可选螺纹：M20, PG11
Rated current: 10A
Rated voltage: 230/250V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Thread: M20, PG11

套件订货号 Order NO.

HA 系列 10 回路接插件套件 HA Series 10 Poles of connector

技术参数 Technical data

工作电流: 16A
工作电压: 230/250V
阻燃等级 (据 UL94): V0
防护等级: IP65
接线形式: 螺钉压接
电缆入口可选螺纹: M20, PG11

Rated current: 16A
Rated voltage: 230/250V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Thread: M20, PG11



A B

注: A, B, C, D 为一套组件



HDC-HA-010-1 侧面进线 /side entry	HDC-HA-010-2 正面进线 /Top entry	HDC-HA-010-3 表面安装 /Surface mounted	HDC-HA-010-4 表面安装 /Surface mounted	HDC-HA-010-1DB 开孔带盖 (侧面) BulkHAad mounted	HDC-HA-010-2DB 开孔带盖 (正面) BulkHAad mounted
----------------------------------	---------------------------------	---------------------------------------	---------------------------------------	---	---

套件订货号 Order NO.

HA 系列 16 回路接插件套件 (带单扣) HA Series 16 Poles of connector (With 1 levers)

技术参数 Technical data


工作电流: 16A
工作电压: 230/250V
阻燃等级 (据 UL94): V0
防护等级: IP65
接线形式: 螺钉压接
电缆入口可选螺纹: M20, PG11

Rated current: 16A
Rated voltage: 230/250V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Thread: M20, PG11



A B

注: A, B, C, D 为一套组件

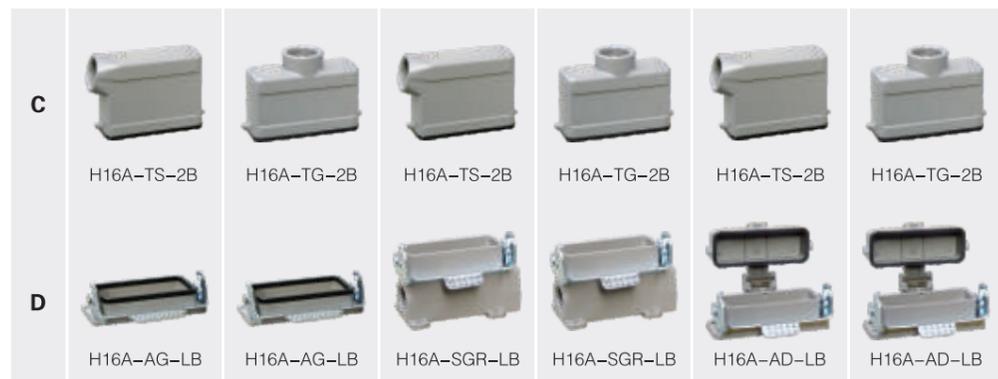

HDC-HA-016-1 侧面进线 /side entry	HDC-HA-016-2 正面进线 /Top entry	HDC-HA-016-3 表面安装 /Surface mounted	HDC-HA-016-4 表面安装 /Surface mounted	HDC-HA-016-1DB 开孔带盖 (侧面) BulkHAad mounted	HDC-HA-016-2DB 开孔带盖 (正面) BulkHAad mounted
----------------------------------	---------------------------------	---------------------------------------	---------------------------------------	---	---


套件订货号 Order NO.

HA 系列 32 回路接插件套件 (带双扣) HA Series 32 Poles of connector (With 2 levers)

技术参数 Technical data

工作电流: 16A
工作电压: 230/250V
阻燃等级 (据 UL94): V0
防护等级: IP65
接线形式: 螺钉压接
电缆入口可选螺纹: M20, PG11

Rated current: 16A
Rated voltage: 230/250V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Thread: M20, PG11

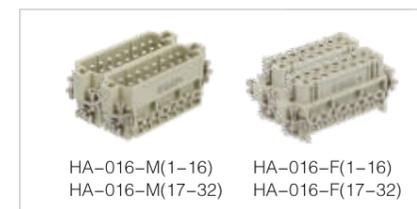

A B

注: A, B, C, D 为一套组件



HDC-HA-032-1 侧面进线 /side entry	HDC-HA-032-2 正面进线 /Top entry	HDC-HA-032-3 表面安装 /Surface mounted	HDC-HA-032-4 表面安装 /Surface mounted	HDC-HA-032-1BS 开孔带盖 (侧面) BulkHAad mounted	HDC-HA-032-2BS 开孔带盖 (正面) BulkHAad mounted
----------------------------------	---------------------------------	---------------------------------------	---------------------------------------	---	---

套件订货号 Order NO.

HE 系列 6 回路接插件套件 HE Series 6 Poles of connector

技术参数 Technical data

工作电流: 16A
工作电压: 400/500V
阻燃等级 (据 UL94): V0
防护等级: IP65
接线形式: 螺钉压接, 弹片压接, 冷压针压接
电缆入口可选螺纹: M20, M25, PG16, PG21

Rated current: 16A
Rated voltage: 400/500V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Spring terminal
Crimp terminal
Thread: M20, M25, PG16, PG21



A B

注: A, B, C, D 为一套组件



HDC-HE-006-1D 侧面进线 /side entry	HDC-HE-006-2D 正面进线 /Top entry	HDC-HE-006-3D 表面安装 /Surface mounted	HDC-HE-006-4D 表面安装 /Surface mounted	HDC-HE-006-1DB 开孔带盖 (侧面) Bulkhead mounted	HDC-HE-006-2DB 开孔带盖 (正面) Bulkhead mounted
-----------------------------------	----------------------------------	--	--	---	---

套件订货号 Order NO.

HE 系列 10 回路接插件套件 (带双扣) HE Series 10 Poles of connector (With 2 levers)

技术参数 Technical data

工作电流: 16A
工作电压: 400/500V
阻燃等级 (据 UL94): V0
防护等级: IP65
接线形式: 螺钉压接, 弹片压接
冷压针压接
电缆入口可选螺纹: M20, M25, PG16, PG21
Rated current: 16A
Rated voltage: 400/500V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Spring terminal
Crimp terminal
Thread: M20, M25, PG16, PG21



A B

注: A, B, C, D 为一套组件



HDC-HE-010-1 侧面进线 /side entry	HDC-HE-010-2 正面进线 /Top entry	HDC-HE-010-3 表面安装 /Surface mounted	HDC-HE-010-4 表面安装 /Surface mounted	HDC-HE-010-1BS 开孔带盖 (侧面) Bulkhead mounted	HDC-HE-010-2BS 开孔带盖 (正面) Bulkhead mounted
---	--	--	--	--	--

套件订货号 Order NO.

HE 系列 10 回路接插件套件 (带单扣) HE Series 10 Poles of connector (With 1 levers)


技术参数 Technical data

工作电流: 16A
工作电压: 400/500V
阻燃等级 (据 UL94): V0
防护等级: IP65
接线形式: 螺钉压接, 弹片压接
冷压针压接
电缆入口可选螺纹: M20, M25, PG16, PG21
Rated current: 16A
Rated voltage: 400/500V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Spring terminal
Crimp terminal
Thread: M20, M25, PG16, PG21



A B

注: A, B, C, D 为一套组件

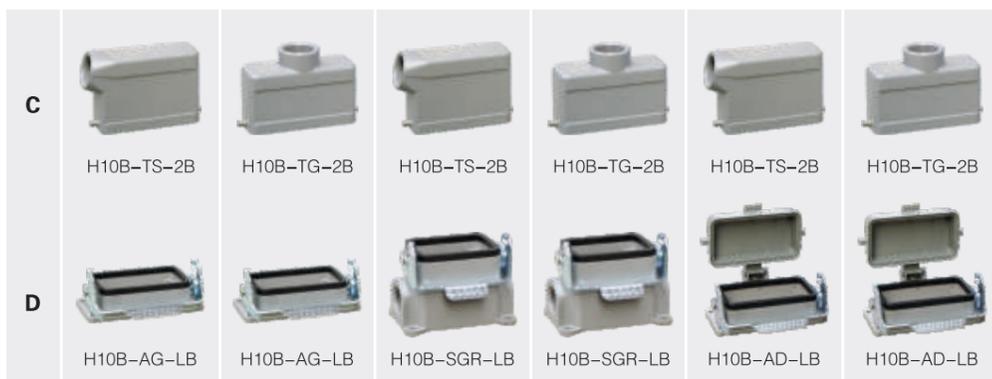

HDC-HE-010-1D 侧面进线 /side entry	HDC-HE-010-2D 正面进线 /Top entry	HDC-HE-010-3D 表面安装 /Surface mounted	HDC-HE-010-4D 表面安装 /Surface mounted	HDC-HE-010-1DB 开孔带盖 (侧面) Bulkhead mounted	HDC-HE-010-2DB 开孔带盖 (正面) Bulkhead mounted
--	---	---	---	--	--

套件订货号 Order NO.

HE 系列 16 回路接插件套件 (带双扣) HE Series 16 Poles of connector (With 2 levers)

技术参数 Technical data

工作电流: 16A
工作电压: 400/500V
阻燃等级 (据 UL94): V0
防护等级: IP65
接线形式: 螺钉压接, 弹片压接
冷压针压接
电缆入口可选螺纹: M20, M25, PG16, PG21
Rated current: 16A
Rated voltage: 400/500V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Spring terminal
Crimp terminal
Thread: M20, M25, PG16, PG21



A B

注: A, B, C, D 为一套组件



HDC-HE-016-1 侧面进线 /side entry	HDC-HE-016-2 正面进线 /Top entry	HDC-HE-016-3 表面安装 /Surface mounted	HDC-HE-016-4 表面安装 /Surface mounted	HDC-HE-016-1BS 开孔带盖 (侧面) Bulkhead mounted	HDC-HE-016-2BS 开孔带盖 (正面) Bulkhead mounted
---	--	--	--	--	--

套件订货号 Order NO.

HE 系列 16 回路接插件套件 (带单扣) HE Series 16 Poles of connector (With 1 levers)


技术参数 Technical data

工作电流: 16A
工作电压: 400/500V
阻燃等级 (据 UL94): V0
防护等级: IP65
接线形式: 螺钉压接, 弹片压接
冷压针压接
电缆入口可选螺纹: M20, M25, PG16, PG21
Rated current: 16A
Rated voltage: 400/500V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Spring terminal
Crimp terminal
Thread: M20, M25, PG16, PG21



A B

注: A, B, C, D 为一套组件

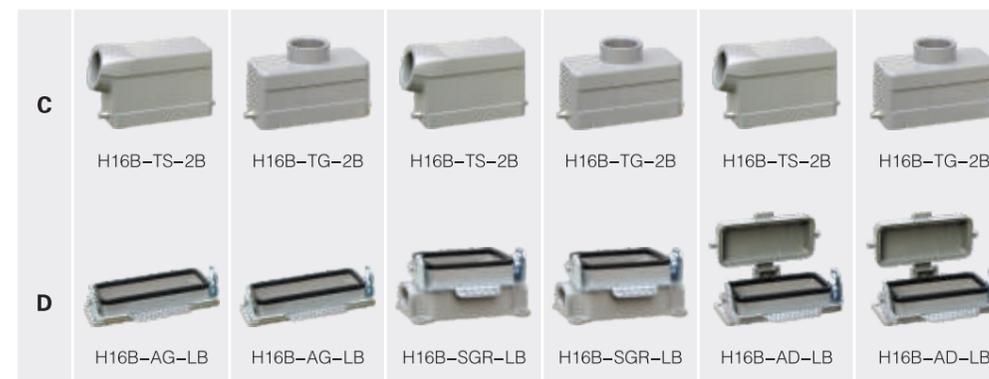

HDC-HE-016-1D 侧面进线 /side entry	HDC-HE-016-2D 正面进线 /Top entry	HDC-HE-016-3D 表面安装 /Surface mounted	HDC-HE-016-4D 表面安装 /Surface mounted	HDC-HE-016-1DB 开孔带盖 (侧面) Bulkhead mounted	HDC-HE-016-2DB 开孔带盖 (正面) Bulkhead mounted
--	---	---	---	--	--

套件订货号 Order NO.

HE 系列 24 回路接插件套件 (带双扣) HE Series 24 Poles of connector (With 2 levers)


技术参数 Technical data

工作电流: 16A
工作电压: 400/500V
阻燃等级 (据 UL94): V0
防护等级: IP65
接线形式: 螺钉压接, 弹片压接
冷压针压接
电缆入口可选螺纹: M20, M25, PG16, PG21
Rated current: 16A
Rated voltage: 400/500V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Spring terminal
Crimp terminal
Thread: M20, M25, PG16, PG21



A B

注: A, B, C, D 为一套组件

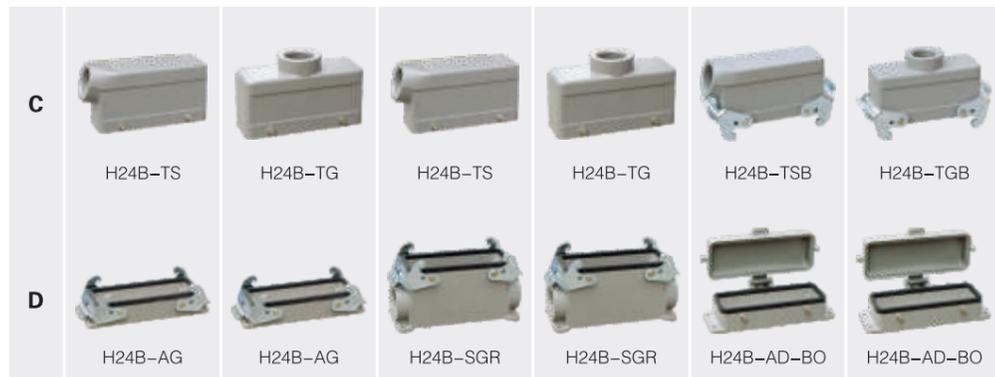

HDC-HE-024-1	HDC-HE-024-2	HDC-HE-024-3	HDC-HE-024-4	HDC-HE-024-1BS	HDC-HE-024-2BS
侧面进线 /side entry	正面进线 /Top entry	表面安装 /Surface mounted	表面安装 /Surface mounted	开孔带盖 (侧面) Bulkhead mounted	开孔带盖 (正面) Bulkhead mounted

套件订货号 Order NO.

HE 系列 24 回路接插件套件 (带单扣) HE Series 24 Poles of connector (With 1 levers)


技术参数 Technical data

工作电流: 16A
工作电压: 400/500V
阻燃等级 (据 UL94): V0
防护等级: IP65
接线形式: 螺钉压接, 弹片压接
冷压针压接
电缆入口可选螺纹: M20, M25, PG16, PG21
Rated current: 16A
Rated voltage: 400/500V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Spring terminal
Crimp terminal
Thread: M20, M25, PG16, PG21



A B

注: A, B, C, D 为一套组件

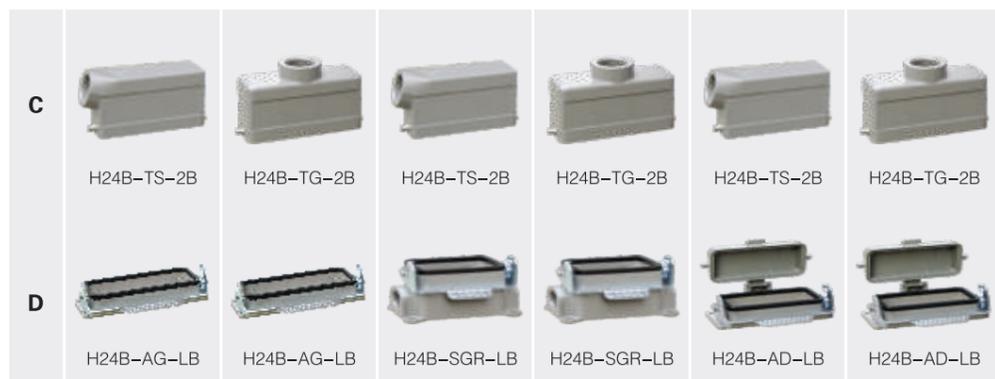


HDC-HE-024-1D	HDC-HE-024-2D	HDC-HE-024-3D	HDC-HE-024-4D	HDC-HE-024-1DB	HDC-HE-024-2DB
侧面进线 /side entry	正面进线 /Top entry	表面安装 /Surface mounted	表面安装 /Surface mounted	开孔带盖 (侧面) Bulkhead mounted	开孔带盖 (正面) Bulkhead mounted

套件订货号 Order NO.

HE 系列 32 回路接插件套件 (带单双扣) HE Series 32 Poles of connector (With 1, 2 levers)

技术参数 Technical data

工作电流: 16A
工作电压: 400/500V
阻燃等级 (据 UL94): V0
防护等级: IP65
接线形式: 螺钉压接, 弹片压接
冷压针压接
电缆入口可选螺纹: M25, M32, PG21, PG29
Rated current: 16A
Rated voltage: 400/500V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Spring terminal
Crimp terminal
Thread: M25, M32, PG21, PG29

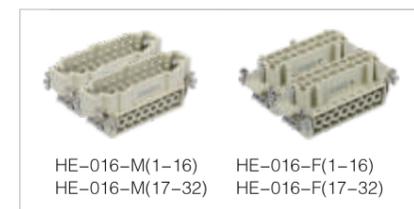

HE-016-M(1-16) HE-016-F(1-16)
HE-016-M(17-32) HE-016-F(17-32)

A B

注: A, B, C, D 为一套组件




HDC-HE-032-1	HDC-HE-032-2	HDC-HE-032-3	HDC-HE-032-4	HDC-HE-032-1D	HDC-HE-032-2D
侧面进线 /side entry	正面进线 /Top entry	表面安装 /Surface mounted	表面安装 /Surface mounted	开孔带盖 (侧面) Bulkhead mounted	开孔带盖 (正面) Bulkhead mounted

套件订货号 Order NO.

HE 系列 48 回路接插件套件 HE Series 48 Poles of connector

技术参数 Technical data


工作电流: 16A
工作电压: 400/500V
阻燃等级 (据 UL94): V0
防护等级: IP65
接线形式: 螺钉压接, 弹片压接
冷压针压接
电缆入口可选螺纹: M32, PG29, PG36
Rated current: 16A
Rated voltage: 400/500V
Flammability acc.to UL94: V0
Degree of protection acc.to DIN40 050: IP65
Terminal: Screw terminal
Spring terminal
Crimp terminal
Thread: M32, PG29, PG36

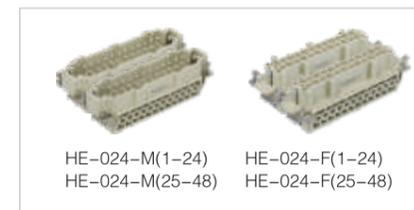

HE-024-M(1-24) HE-024-F(1-24)
HE-024-M(25-48) HE-024-F(25-48)

A B

注: A, B, C, D 为一套组件

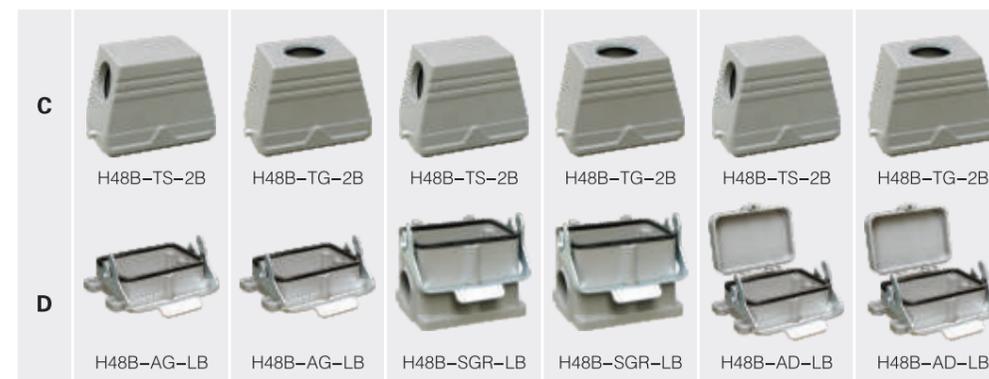

HDC-HE-048-1D	HDC-HE-048-2D	HDC-HE-048-3D	HDC-HE-048-4D	HDC-HE-048-1DB	HDC-HE-048-2DB
侧面进线 /side entry	正面进线 /Top entry	表面安装 /Surface mounted	表面安装 /Surface mounted	开孔带盖 (侧面) Bulkhead mounted	开孔带盖 (正面) Bulkhead mounted

套件订货号 Order NO.

HA 系列 HA Series	3+ 	4+ 
技术参数 Technical data ◆ 额定电流 /Rated current: 10A ◆ 额定电压 /Rated voltage: 230/250V ◆ 压接形式: 螺钉压接 Terminal: Screw terminal		
	HA-003-M	HA-003-F
	0.5~2.5mm ²	
	H3A	

HA 系列 HA Series	10+ 	16+ 	32+ 	
技术参数 Technical data ◆ 额定电流 /Rated current: 16A ◆ 额定电压 /Rated voltage: 230/250V ◆ 压接形式: 螺钉压接 Terminal: Screw terminal				
	HA-010-M	HA-010-F	HA-016-M	HA-016-F
	0.5~2.5mm ²		0.5~2.5mm ²	
	H10A		H16A	

HE 系列 HE Series	6+ 	10+ 	16+ 	
技术参数 Technical data ◆ 额定电流 /Rated current: 16A ◆ 额定电压 /Rated voltage: 400/500V ◆ 压接形式: 螺钉压接 Terminal: Screw terminal				
	HE-006-M	HE-006-F	HE-010-M	HE-010-F
	0.5~4.0mm ²		0.5~4.0mm ²	
	H6B		H10B	

HE 系列 HE Series	24+ 	32+ 	48+ 	
技术参数 Technical data ◆ 额定电流 /Rated current: 16A ◆ 额定电压 /Rated voltage: 400/500V ◆ 压接形式: 螺钉压接 Terminal: Screw terminal				
	HE-024-M	HE-024-F	HE-016-M(1-16)	HE-016-F(1-16)
	0.5~4.0mm ²		0.5~4.0mm ²	
	H24B		H32B	

HEE 系列 HEE Series	10+ 	18+ 
技术参数 Technical data ◆ 额定电流 /Rated current: 16A ◆ 额定电压 /Rated voltage: 500V ◆ 压接形式: 冷压针压接 Terminal: Crimp terminal		
	HEE-010-M	HEE-010-F
	0.5~4.0mm ²	
	H6B	

HEE 系列 HEE Series	32+ 	46+ 
技术参数 Technical data ◆ 额定电流 /Rated current: 16A ◆ 额定电压 /Rated voltage: 500V ◆ 压接形式: 冷压针压接 Terminal: Crimp terminal		
	HEE-032-M	HEE-032-F
	0.5~4.0mm ²	
	H16B	

HEE 系列 HEE Series	64+ 	92+ 
技术参数 Technical data ◆ 额定电流 /Rated current: 16A ◆ 额定电压 /Rated voltage: 500V ◆ 压接形式: 冷压针压接 Terminal: Crimp terminal		
	HEE-032-M(1-32)	HEE-032-F(1-32)
	0.5~4.0mm ²	
	H32B	

专用工具	HEE 冷压针专用工具	HEE 冷压针
 冷压针压线钳 CRIMPOBOX-0.5/4	 HEE 冷压针退针器	CEF/CEM(16A) 冷压针  CEF
		 CEM
压接范围 Crimping wire range	0.5~4.0mm ²	

HD 系列 HD Series	7+	8+	15+
技术参数 Technical data ◆ 额定电流 /Rated current: 10A ◆ 额定电压 /Rated voltage: 250V ◆ 压接形式: 冷压针压接 Terminal: Crimp terminal			
公插体 / 母插体 (M/F)	HD-007-M	HD-007-F	HD-015-M HD-015-F
导线额定截面 /Wire gauge	0.5~2.5mm ²		0.5~2.5mm ²
对应防护外壳 /Suit hoods/housings	H3A		H10A

HD 系列 HD Series	25+	40+	50+
技术参数 Technical data ◆ 额定电流 /Rated current: 10A ◆ 额定电压 /Rated voltage: 250V ◆ 压接形式: 冷压针压接 Terminal: Crimp terminal			
公插体 / 母插体 (M/F)	HD-025-M	HD-025-F	HD-040-M HD-040-F HD-025-M(1-25) HD-025-F(1-25) HD-025-M(26-50) HD-025-F(26-50)
导线额定截面 /Wire gauge	0.5~2.5mm ²		0.5~2.5mm ²
对应防护外壳 /Suit hoods/housings	H16A		H32A

HD 系列 HD Series	64+	80+	128+
技术参数 Technical data ◆ 额定电流 /Rated current: 10A ◆ 额定电压 /Rated voltage: 250V ◆ 压接形式: 冷压针压接 Terminal: Crimp terminal			
公插体 / 母插体 (M/F)	HD-064-M	HD-064-F	HD-040-M(1-40) HD-040-F(1-40) HD-040-M(40-80) HD-040-F(40-80) HD-064-M(1-64) HD-064-F(1-64) HD-064-M(65-128) HD-064-F(65-128)
导线额定截面 /Wire gauge	0.5~2.5mm ²		0.5~2.5mm ²
对应防护外壳 /Suit hoods/housings	H24B		H48B

专用工具	HD/HDD 冷压针专用工具		HD/HDD 冷压针
	<p>冷压针压线钳 CRIMPOBOX-0.5/4</p>	<p>HD 冷压针退针器</p>	CDF/CDM(10A) 冷压针 CDF CDM
压接范围 Crimping wire range	0.5~4.0mm ²		

HDD 系列 HDD Series	24+	42+
技术参数 Technical data ◆ 额定电流 /Rated current: 10A ◆ 额定电压 /Rated voltage: 250V ◆ 压接形式: 冷压针压接 Terminal: Crimp terminal		
公插体 / 母插体 (M/F)	HDD-024-M	HDD-024-F
导线额定截面 /Wire gauge	0.5~2.5mm ²	
对应防护外壳 /Suit hoods/housings	H6B	

HDD 系列 HDD Series	72+	108+
技术参数 Technical data ◆ 额定电流 /Rated current: 10A ◆ 额定电压 /Rated voltage: 250V ◆ 压接形式: 冷压针压接 Terminal: Crimp terminal		
公插体 / 母插体 (M/F)	HDD-072-M	HDD-072-F
导线额定截面 /Wire gauge	0.5~2.5mm ²	
对应防护外壳 /Suit hoods/housings	H16B	

HDD 系列 HDD Series	144+	216+
技术参数 Technical data ◆ 额定电流 /Rated current: 10A ◆ 额定电压 /Rated voltage: 250V ◆ 压接形式: 冷压针压接 Terminal: Crimp terminal		
公插体 / 母插体 (M/F)	HDD-072-M(1-72) HDD-072-M(73-144)	HDD-072-F(1-72) HDD-072-F(73-144)
导线额定截面 /Wire gauge	0.5~2.5mm ²	
对应防护外壳 /Suit hoods/housings	H32B	

专用工具	HD/HDD 冷压针专用工具		HD/HDD 冷压针
	<p>冷压针压线钳 CRIMPOBOX-0.5/4</p>	<p>HD 冷压针退针器</p>	CDF/CDM(10A) 冷压针 CDF CDM
压接范围 Crimping wire range	0.5~4.0mm ²		

HEAV 系列 HEAV Series	6+		10+	
技术参数 Technical data	<ul style="list-style-type: none"> ◆ 额定电流 /Rated current: 16A ◆ 额定电压 /Rated voltage: 500V 			
公插体 / 母插体 (M/F)				
压接形式 /Terminal	HEAV-006-M HEAV-006-F	HEAV-006-MS HEAV-006-FS	HEAV-010-M HEAV-010-F	HEAV-010-MS HEAV-010-FS
压接形式 /Terminal	螺钉压接 /Screw terminal	弹片压接 /Spring terminal	螺钉压接 /Screw terminal	弹片压接 /Spring terminal
导线额定截面 /Wire gauge	0.5~2.5mm ²	0.5~2.5mm ²	0.5~2.5mm ²	0.5~2.5mm ²
对应防护外壳 /Suit hoods/housings	H6B		H10B	

HEAV 系列 HEAV Series	16+		24+	
技术参数 Technical data	<ul style="list-style-type: none"> ◆ 额定电流 /Rated current: 16A ◆ 额定电压 /Rated voltage: 500V 			
公插体 / 母插体 (M/F)				
压接形式 /Terminal	HEAV-016-M HEAV-016-F	HEAV-016-MS HEAV-016-FS	HEAV-024-M HEAV-024-F	HEAV-024-MS HEAV-024-FS
压接形式 /Terminal	螺钉压接 /Screw terminal	弹片压接 /Spring terminal	螺钉压接 /Screw terminal	弹片压接 /Spring terminal
导线额定截面 /Wire gauge	0.5~2.5mm ²	0.5~2.5mm ²	0.5~2.5mm ²	0.5~2.5mm ²
对应防护外壳 /Suit hoods/housings	H16B		H24B	

HSB 系列 HSB Series	6+		12+	
技术参数 Technical data	<ul style="list-style-type: none"> ◆ 额定电流 /Rated current: 35A ◆ 额定电压 /Rated voltage: 500V 			
公插体 / 母插体 (M/F)				
压接形式 /Terminal	HSB-006-M HSB-006-F	HSB-006-M(1-6) HSB-006-F(1-6)	HSB-006-M(7-12) HSB-006-F(7-12)	
压接形式 /Terminal	螺钉压接 /Screw terminal		螺钉压接 /Screw terminal	
导线额定截面 /Wire gauge	0.5~6.0mm ²		0.5~6.0mm ²	
对应防护外壳 /Suit hoods/housings	H16B		H32B	

HWK 系列 HWK Series	HWK4/6+		HWK6/6+		HWK3/6/6+	
技术参数 Technical data	<ul style="list-style-type: none"> ◆ 压接形式: 螺钉压接 Terminal: Screw terminal 					
公插体 / 母插体 (M/F)						
压接形式 /Terminal	螺钉压接 /Screw terminal		螺钉压接 /Screw terminal		螺钉压接 /Screw terminal	
高电流导线截面 /Wire gauge	2.5~6.0mm ²		2.5~6.0mm ²		10.0~25.0mm ² , 4.0~10.0mm ²	
控制电流导线截面 /Wire gauge	1.0~2.5mm ²		1.0~2.5mm ²		1.0~2.5mm ²	
对应防护外壳 /Suit hoods/housings	H16B		H16B		H24B	

HK 系列 HK Series	4/0+		4/2+		4/8+	
技术参数 Technical data	<ul style="list-style-type: none"> ◆ 高电流: 80A, 控制电流: 16A ◆ 高电压: 690V, 控制电压: 400V 					
公插体 / 母插体 (M/F)						
压接形式 /Terminal	HK4/0-004-M HK4/0-004-F	HK4/2-006-M HK4/2-006-F	HK4/8-012-M HK4/8-012-F			
压接形式 /Terminal	螺钉压接 /Screw terminal		螺钉压接 /Screw terminal		螺钉压接 /Screw terminal	
高电流导线截面 /Wire gauge	1.5~16.0mm ²		1.5~16.0mm ²		1.5~16.0mm ²	
控制电流导线截面 /Wire gauge	0.5~2.5mm ²		0.5~2.5mm ²		0.5~2.5mm ²	
对应防护外壳 /Suit hoods/housings	H6B		H6B		H24B	

HK 系列 HK Series	6/6+		6/12+		12/2+	
技术参数 Technical data	高电流: 100A, 控制电流: 16A 高电压: 690V, 控制电压: 400V		高电流: 40A, 控制电流: 16A 高电压: 690V, 控制电压: 400V		高电流: 40A, 控制电流: 16A 高电压: 500V, 控制电压: 250V	
公插体 / 母插体 (M/F)						
压接形式 /Terminal	HK6/6-012-M HK6/6-012-F	HK6/12-018-M HK6/12-018-F	HK12/2-014-M HK12/2-014-F			
压接形式 /Terminal	轴向压接 /Axial screw terminal		轴向压接 /Axial screw terminal		冷压针压接 /Crimp terminal	
高电流导线截面 /Wire gauge	16.0~35.0mm ²		2.5~10.0mm ²		2.5~6.0mm ²	
控制电流导线截面 /Wire gauge	0.5~2.5mm ²		0.5~2.5mm ²		0.14~2.5mm ²	
对应防护外壳 /Suit hoods/housings	H24B		H6B		H6B	

HK 系列 HK Series	6/36+		8/24+		轴向压接工具	
技术参数 Technical data	高电流: 40A, 控制电流: 16A 高电压: 690V, 控制电压: 250V		高电流: 16A, 控制电流: 10A 高电压: 400V, 控制电压: 250V		适用于轴向压接插针	
公插体 / 母插体 (M/F)						
压接形式 /Terminal	HK6/36-036-M HK6/36-036-F	HK6/24-032-M HK6/24-032-F	HK			
压接形式 /Terminal	冷压针压接 /Crimp terminal		冷压针压接 /Crimp terminal			
高电流导线截面 /Wire gauge	1.5~6.0mm ²		0.5~4.0mm ²			
控制电流导线截面 /Wire gauge	0.14~2.5mm ²		0.14~2.5mm ²			
对应防护外壳 /Suit hoods/housings	H16B		H10B			

HQ 系列 HQ Series	5+		7+		8+	
技术参数 Technical data	<ul style="list-style-type: none"> ◆ 额定电流 /Rated current: 16A ◆ 额定电压 /Rated voltage: 400V ◆ 压接形式: 冷压针压接 Terminal: Crimp terminal (冷压针需单独订购) Order crimp contacts separately 					
公插体 / 母插体 (M/F)						
压接形式 /Terminal	HQ-005-M HQ-005-F	HQ-007-M HQ-007-F	HQ-008-M HQ-008-F			
压接形式 /Terminal	冷压针压接 /Crimp terminal		冷压针压接 /Crimp terminal		冷压针压接 /Crimp terminal	
高电流导线截面 /Wire gauge	0.5~2.5mm ²		0.5~2.5mm ²		0.5~4.0mm ²	
控制电流导线截面 /Wire gauge	0.5~2.5mm ²		0.5~2.5mm ²		0.5~4.0mm ²	
对应防护外壳 /Suit hoods/housings	H3A		H3A		H8A	


技术参数/Technical parameters

模块数量	2,3,4,6
接地线	
-功率线	4~6mm AWG 12~8
-信号线	1~2.5mm AWG 18~14
材料	压铸锌合金
工作温度范围	-40°C~+125°C
可拔插次数	≥500


模块拆装示意图




6B 活动框架 适用所有6B外壳




描述	标示	型号
用于2个模块	A-B	HF6B-NUA2
用于2个模块	a-b	HF6B-NLA2



10B 活动框架 适用所有10B外壳




描述	标示	型号
用于3个模块	A-C	HF10B-NUA2
用于3个模块	a-c	HF10B-NLA2



16B 活动框架 适用所有16B外壳




描述	标示	型号
用于4个模块	A-D	HF16B-NUA2
用于4个模块	a-d	HF16B-NLA2



24B 活动框架 适用所有24B外壳




描述	标示	型号
用于6个模块	A-F	HF24B-NUA2
用于6个模块	a-f	HF24B-NLA2








固定块(每个框架配有2 pcs)














描述	型号
固定框架防止 模块松脱	HF-LE2









尺寸	a	b	c
HZW-H6	44	35	52
HZW-10	57	49	66
HZW-16	77.5	64	85.5
HZW-24	104	94	112

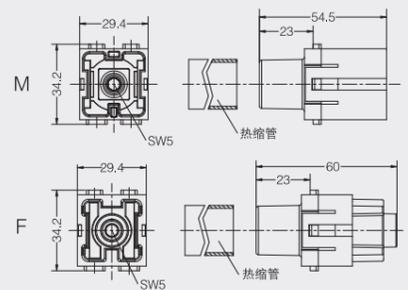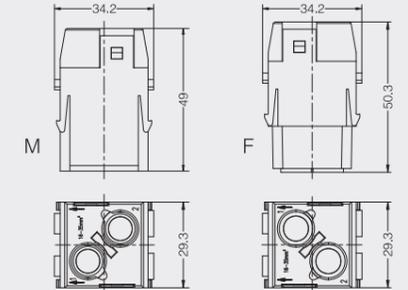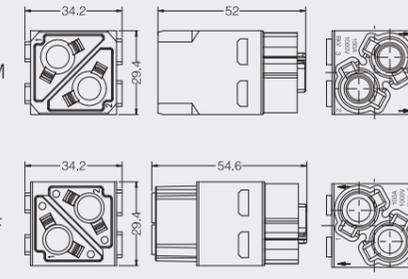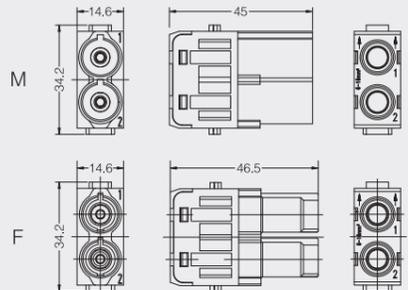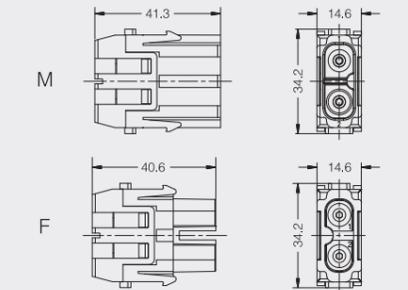产品型号/Type of products	技术参数/Technical Parameters	外形尺寸/Dimension
 H2MK-001.1-M H2MK-001.2-M	工作电流/Working current: 200A 工作电压/Working voltage: 1000V 耐冲击电压/Rate impulse voltage: 8kV 污染等级/Pollution degree: 3 压接形式: 冷压连接 Terminal: Crimp terminal 线径/Wire gauge: 25~70mm ² 内六角扳手/Hexagonal driver: SW-5 x 150	
 H2MK-002.1-M H2MK-002.2-M	工作电流/Working current: 100A 工作电压/Working voltage: 1000V 耐冲击电压/Rate impulse voltage: 8kV 污染等级/Pollution degree: 3 压接形式: 轴向螺栓连接 Terminal: Axial screw terminal 线径/Wire gauge: 10~35mm ² 内六角扳手/Hexagonal driver: SW-4 x 100	
 H2MK-002-MC H2MK-002-FC	工作电流/Working current: 100A 工作电压/Working voltage: 1000V 耐冲击电压/Rate impulse voltage: 8kV 污染等级/Pollution degree: 3 压接形式: 冷压连接 Terminal: Crimp terminal 线径/Wire gauge: 16~35mm ²	
 HMK70-002.1-M HMK70-002.2-M	工作电流/Working current: 70A 工作电压/Working voltage: 1000V 耐冲击电压/Rate impulse voltage: 8kV 污染等级/Pollution degree: 3 压接形式: 轴向螺栓连接 Terminal: Axial screw terminal 线径/Wire gauge: 6~22mm ² 内六角扳手/Hexagonal driver: SW-2.5 x 100	
 HMK-002.1-M HMK-002.2-M	工作电流/Working current: 40A 工作电压/Working voltage: 1000V 耐冲击电压/Rate impulse voltage: 8kV 污染等级/Pollution degree: 3 压接形式: 轴向螺栓连接 Terminal: Axial screw terminal 线径/Wire gauge: 2.5~10mm ² 内六角扳手/Hexagonal driver: SW-2 x 40	

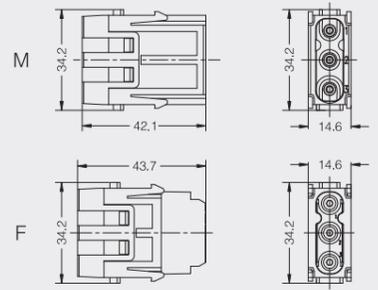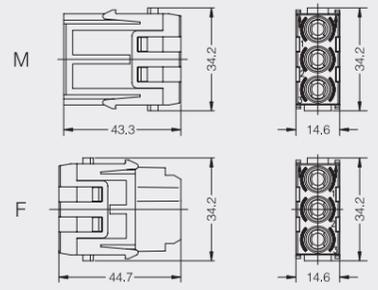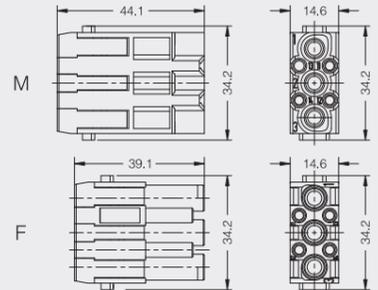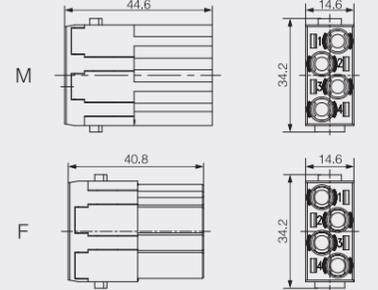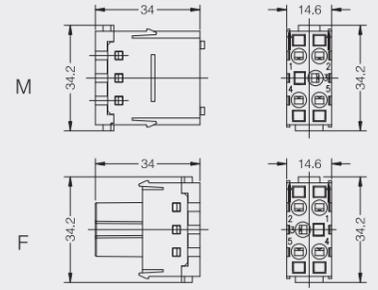产品型号/Type of products	技术参数/Technical Parameters	外形尺寸/Dimension
 <p>HMK-003.1-M HMK-003.2-M</p>	<p>工作电流/Working current: 40A 工作电压/Working voltage: 690V 耐冲击电压/Rate impulse voltage: 8kV 污染等级/Pollution degree: 3 压接形式: 轴向螺栓连接 Terminal: Axial screw terminal 线径/Wire gauge: 2.5~10mm² 内六角扳手/Hexagonal driver: SW-2 × 40</p>	 <p>针排列/接线侧视图</p>
 <p>HMK-003-MC HMK-003-FC</p>	<p>工作电流/Working current: 40A 工作电压/Working voltage: 1500V 耐冲击电压/Rate impulse voltage: 6kV 污染等级/Pollution degree: 3 压接形式: 冷压连接 Terminal: Crimp terminal 线径/Wire gauge: 1.5~6mm²</p>	 <p>针排列/接线侧视图</p>
 <p>HMK-003/4-MC HMK-003/4-FC</p>	<p>工作电流/Working current 电力区/Power area: 40A 信号区/Signal area: 10A 工作电压/Working voltage: 830V 耐冲击电压/Rate impulse voltage: 8kV 污染等级/Pollution degree: 3 压接形式: 冷压连接 Terminal: Crimp terminal 线径/Wire gauge 电力区/Power area: 1.5~6mm² 信号区/Signal area: 0.14~2.5mm²</p>	
 <p>HMK-004-MC HMK-004-FC</p>	<p>工作电流/Working current: 40A 工作电压/Working voltage: 830V 耐冲击电压/Rate impulse voltage: 8kV 污染等级/Pollution degree: 3 压接形式: 冷压连接 Terminal: Crimp terminal 线径/Wire gauge: 1.5~6mm²</p>	
 <p>HME-005-MS HME-005-FS</p>	<p>工作电流/Working current: 16A 工作电压/Working voltage: 400V 耐冲击电压/Rate impulse voltage: 6kV 污染等级/Pollution degree: 3 压接形式: 笼式弹片压接 Terminal: Cage-clamp terminal 线径/Wire gauge: 0.14~2.5mm²</p>	 <p>针排列/接线侧视图</p>

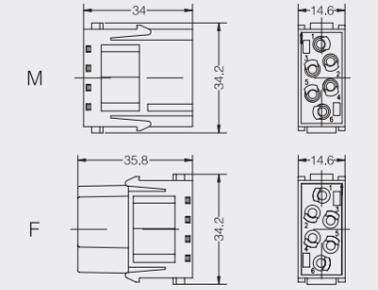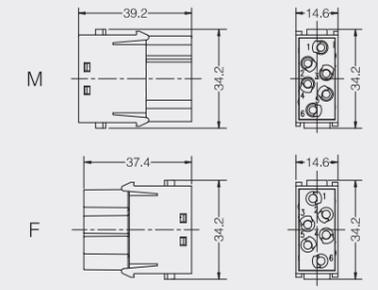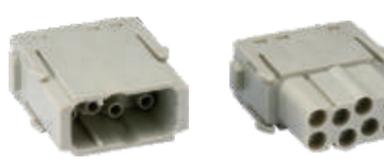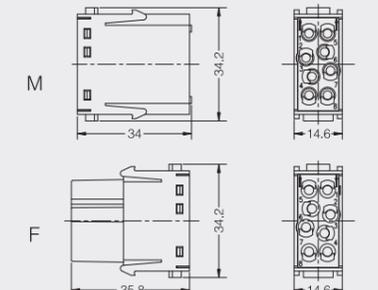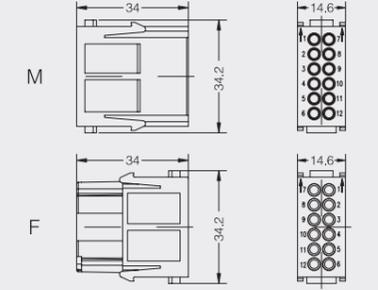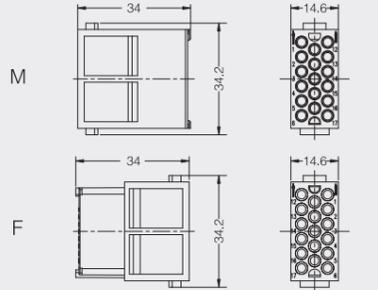产品型号/Type of products	技术参数/Technical Parameters	外形尺寸/Dimension
 <p>HME-006-MC HME-006-FC</p>	<p>工作电流/Working current: 16A 工作电压/Working voltage: 500V 耐冲击电压/Rate impulse voltage: 6kV 污染等级/Pollution degree: 3 压接形式: 冷压连接 Terminal: Crimp terminal 线径/Wire gauge: 0.14~4mm² 编码销/Code pin: CODE-E</p>	 <p>针排列/接线侧视图</p>
 <p>HVME-006-MC HVME-006-FC</p>	<p>工作电流/Working current: 16A 工作电压/Working voltage: 830V 耐冲击电压/Rate impulse voltage: 8kV 污染等级/Pollution degree: 3 压接形式: 冷压连接 Terminal: Crimp terminal 线径/Wire gauge: 0.14~4mm² 编码销/Code pin: CODE-E</p>	 <p>针排列/接线侧视图</p>
 <p>HMEE-008-MC HMEE-008-FC</p>	<p>工作电流/Working current: 16A 工作电压/Working voltage: 400V 耐冲击电压/Rate impulse voltage: 6kV 污染等级/Pollution degree: 3 压接形式: 冷压连接 Terminal: Crimp terminal 线径/Wire gauge: 0.14~4mm² 编码销/Code pin: CODE-E</p>	
 <p>HMD-012-MC HMD-012-FC</p>	<p>工作电流/Working current: 10A 工作电压/Working voltage: 250V 耐冲击电压/Rate impulse voltage: 4kV 污染等级/Pollution degree: 3 压接形式: 冷压连接 Terminal: Crimp terminal 线径/Wire gauge: 0.14~2.5mm²</p>	 <p>针排列/接线侧视图</p>
 <p>HMDD-017-MC HMDD-017-FC</p>	<p>工作电流/Working current: 10A 工作电压/Working voltage: 160V 耐冲击电压/Rate impulse voltage: 2.5kV 污染等级/Pollution degree: 3 压接形式: 冷压连接 Terminal: Crimp terminal 线径/Wire gauge: 0.14~2.5mm²</p>	 <p>针排列/接线侧视图</p>

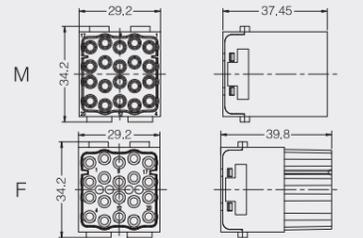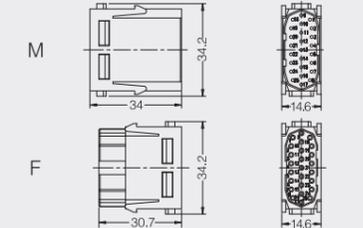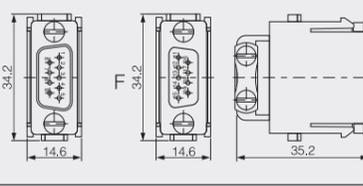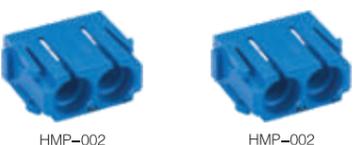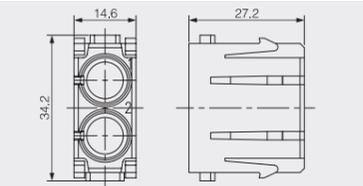
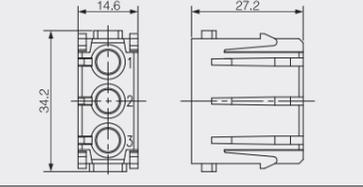
产品型号/Type of products	技术参数/Technical Parameters	外形尺寸/Dimension
 <p>H2MEE-020-MC H2MEE-020-FC</p>	工作电流/Working current: 16A 工作电压/Working voltage: 500V 耐冲击电压/Rate impulse voltage: 6kV 污染等级/Pollution degree: 3 压接形式: 冷压连接 Terminal: Crimp terminal 线径/Wire gauge: 0.14~4mm ²	
 <p>HMDS-025-MC HMDS-025-FC</p>	工作电流/Working current: 5A 工作电压/Working voltage: 50V 耐冲击电压/Rate impulse voltage: 0.8kV 污染等级/Pollution degree: 3	
D-Sub 模块  <p>HMDS-009-MC HMDS-009-FC</p>	工作电流/Working current: 5A 工作电压/Working voltage: 50V 耐冲击电压/Rate impulse voltage: 0.8kV 污染等级/Pollution degree: 3	
气动模块  <p>HMP-002 HMP-002</p>	接插体针数/Number of contacts: 2 材料/Material: PC 阻燃等级/Flammability acc.to UI94: V0 可拔插次数/Mechanical working life: ≥500 材料/Material: 聚甲醛/POM 内径/Diameter: 6.0mm/1/4 工作压力/最大 8 bar/116 psi Working pressure: Max 8 bar/116 psi	
 <p>HMP-003 HMP-003</p>	接插体针数/Number of contacts: 3 材料/Material: PC 阻燃等级/Flammability acc.to UI94: V0 可拔插次数/Mechanical working life: ≥500 材料/Material: 聚甲醛/POM 内径/Diameter: 1.6mm/1/16" 工作压力/最大 8 bar/116 psi Working pressure: Max 8 bar/116 psi	

附件 Accessories

针用于软管内径(ID) For Tube internal Diameter ID

描述	类别	ID	型号	尺寸
无锁止	公	1.6mm	PCM-1.6	
		3.0mm	PCM-1.6	
		4.0mm	PCM-1.6	
无锁止	母	1.6mm	PCF-1.6	
		3.0mm	PCF-1.6	
		4.0mm	PCF-1.6	

针用于软管内径(ID) For Tube internal Diameter ID


描述	类别	ID	型号	尺寸
带锁止	母	1.6mm	PCFS-1.6	
		3.0mm	PCFS-1.6	
		4.0mm	PCFS-1.6	

冷压针及对应工具 Crimp Terminals

16A 冷压接插针 16A Crimp contacts

技术参数 Technical data

- 材料: 铜
Material: copper
- 接触电阻 /Contact resistance: ≤ 1mΩ
- 接线形式: 冷压工具压接
Terminal: crimp connection



线径 Wire gauge	接线长度 Stripping length	镀银冷压针型号 Contacts, Silver-plated	镀金冷压针型号 Contacts, Gold-plated
0.5 mm ²	AWG 20 7.5mm	CEM-0.5	DEM-0.5
0.75 mm ²	AWG 18 7.5mm	CEM-0.75	DEM-0.75
1.0 mm ²	AWG 18 7.5mm	CEM-1.0	DEM-1.0
1.5 mm ²	AWG 16 7.5mm	CEM-1.5	DEM-1.5
2.5 mm ²	AWG 14 7.5mm	CEM-2.5	DEM-2.5
4.0 mm ²	AWG 12 7.5mm	CEM-4.0	DEM-4.0



线径 Wire gauge	接线长度 Stripping length	镀银冷压针型号 Contacts, Silver-plated	镀金冷压针型号 Contacts, Gold-plated
0.5 mm ²	AWG 20 7.5mm	CEM-0.5	DEM-0.5
0.75 mm ²	AWG 18 7.5mm	CEM-0.75	DEM-0.75
1.0 mm ²	AWG 18 7.5mm	CEM-1.0	DEM-1.0
1.5 mm ²	AWG 16 7.5mm	CEM-1.5	DEM-1.5
2.5 mm ²	AWG 14 7.5mm	CEM-2.5	DEM-2.5
4.0 mm ²	AWG 12 7.5mm	CEM-4.0	DEM-4.0

10A 冷压接插针 10A Crimp contacts

技术参数 Technical data

- 材料: 铜
Material: copper
- 接触电阻 /Contact resistance: ≤ 3mΩ
- 接线形式: 冷压工具压接
Terminal: crimp connection



线径 Wire gauge	接线长度 Stripping length	镀银冷压针型号 Contacts, Silver-plated	镀金冷压针型号 Contacts, Gold-plated
0.5 mm ²	AWG 20 8.0mm	CDM-0.5	DDM-0.5
0.75 mm ²	AWG 18 8.0mm	CDM-0.75	DDM-0.75
1.0 mm ²	AWG 18 8.0mm	CDM-1.0	DDM-1.0
1.5 mm ²	AWG 16 8.0mm	CDM-1.5	DDM-1.5
2.5 mm ²	AWG 14 8.0mm	CDM-2.5	DDM-2.5



线径 Wire gauge	接线长度 Stripping length	镀银冷压针型号 Contacts, Silver-plated	镀金冷压针型号 Contacts, Gold-plated
0.5 mm ²	AWG 20 8.0mm	CDF-0.5	DDF-0.5
0.75 mm ²	AWG 18 8.0mm	CDF-0.75	DDF-0.75
1.0 mm ²	AWG 18 8.0mm	CDF-1.0	DDF-1.0
1.5 mm ²	AWG 16 8.0mm	CDF-1.5	DDF-1.5
2.5 mm ²	AWG 14 8.0mm	CDF-2.5	DDF-2.5

40A 冷压接插针 40A Crimp contacts

技术参数 Technical data

- 材料: 铜
Material: copper
- 接触电阻 /Contact resistance: ≤ 4mΩ
- 接线形式: 冷压工具压接
Terminal: crimp connection



线径 Wire gauge	接线长度 Stripping length	镀银冷压针型号 Contacts, Silver-plated	镀金冷压针型号 Contacts, Gold-plated
1.75 mm ²	AWG 16 8.0mm	CMM-1.5	DMM-1.5
2.25 mm ²	AWG 14 8.0mm	CMM-2.5	DMM-2.5
2.85 mm ²	AWG 12 8.0mm	CMM-4.0	DMM-4.0
3.50 mm ²	AWG 10 8.0mm	CMM-6.0	DMM-6.0



线径 Wire gauge	接线长度 Stripping length	镀银冷压针型号 Contacts, Silver-plated	镀金冷压针型号 Contacts, Gold-plated
1.75 mm ²	AWG 16 8.0mm	CMF-1.5	DMF-1.5
2.25 mm ²	AWG 14 8.0mm	CMF-2.5	DMF-2.5
2.85 mm ²	AWG 12 8.0mm	CMF-4.0	DMF-4.0
3.50 mm ²	AWG 10 8.0mm	CMF-6.0	DMF-6.0

冷压针退针工具 Crimping tool and removal tool

技术参数 Technical data

- 压线钳: 压接范围 0.5~4.0mm²
Crimping tool: crimping wire range 0.5~4.0mm²
- 适用压接 HD/HDD, HEE 冷压针
For HD/HDD, HEE crimp contacts




编码销




订货号: CODE-M3

模块型编码销




订货号: MCODE-M3

导向孔




订货号: GBUSH-M3

模块型导向孔




订货号: MGBUSH-M3

导向销




订货号: GPIN-M3

模块型导向销



订货号: MGPIN-M3

编号销




订货号: CODE-E

编号销




订货号: CODE-D

适用于可安装一个插体或框架的外壳




适用于可安装两个插体或框架的外壳

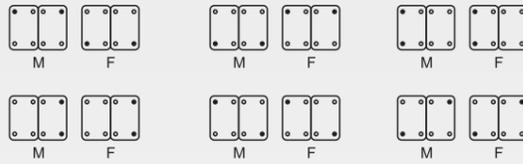


● 编码销
○ 正常螺丝

M-公插体
F-母插体

适用于可安装一个插体或框架的外壳

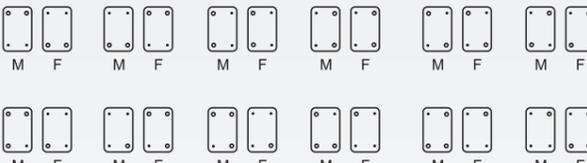

适用于可安装两个插体或框架的外壳

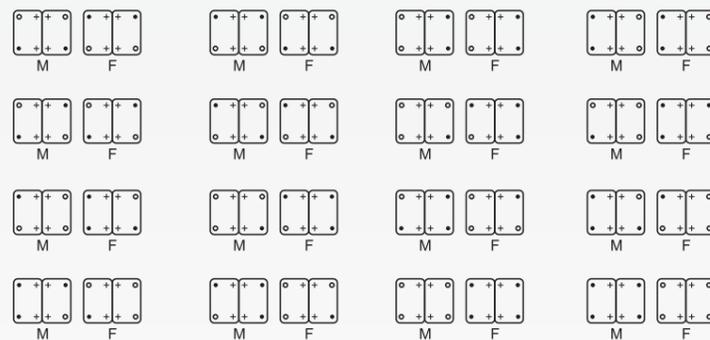

○ 导向套
● 导向销

M-公插体
F-母插体

- ① 使用此编码销, 可避免相同连接器的误插,
- ② 适用于 HEC, HEE, HQ 5/0, HM-006, HM-008
- ③ 使用编码销时, 公插对应孔不能装插针

- ① 使用此编号销, 可避免相同连接器的误插,
- ② 适用于 HD, HDD, HMD-012, HMDD-017, HQ7/0, HQ12/0
- ③ 使用编号销时, 公插对应孔不能装插针


防护等级 Degree of protection: IP65

上壳 Hoods

顶部进线
Top entry




螺纹 Thread	型号 Type
M20	H3A-TE-2B-M20
PG11	H3A-TE-2B-PG11
PG13.5	H3A-TE-2B-PG13.5



侧面进线
Side entry




螺纹 Thread	型号 Type
M20	H3A-SE-2B-M20
PG11	H3A-SE-2B-PG11
PG13.5	H3A-SE-2B-PG13.5



不封底下壳
Bulkhead mounting



螺纹 Thread	型号 Type
---	H3A-BK-1LW-MCV/M(配公芯)
---	H3A-BK-1LW-MCV/F(配母芯)




下壳底座 Housings

开孔安装
Bulkhead mounting: Bottom entry




螺纹 Thread	型号 Type
---	H3A-BK-1LW

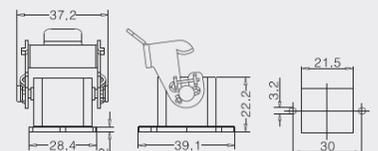

开孔安装(侧出形式)
Bulkhead mounting: Bottom entry




螺纹 Thread	型号 Type
---	H3A-BK-1LW-SE

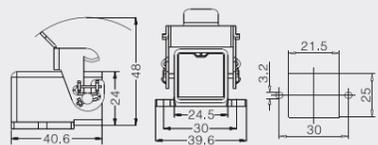

表面安装(侧面形式)
Surface mounting: Side entry




螺纹 Thread	型号 Type
M20	H3A-SF-1LW-M20
PG11	H3A-SF-1LW-PG11
PG13.5	H3A-SF-1LW-PG13.5

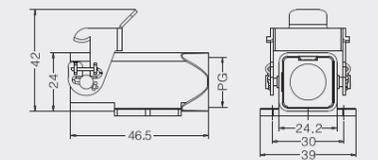

电缆对接下壳
Cable-to-cable hood



螺纹 Thread	型号 Type
M20	H3A-CCT-1LW-M20
PG11	H3A-CCT-1LW-PG11
PG13.5	H3A-CCT-1LW-PG13.5



防护等级 Degree of protection: IP65

上壳 Hoods

侧面进线 Side entry	螺纹 Thread	型号 Type	低结构 / Low construction
	M20	H10A-SE-2B-M20	
	PG16	H10A-SE-2B-PG16	
	高结构 / High construction		
	M25	H10A-SEH-2B-M25	
	PG16	H10A-SEH-2B-PG16	
PG21	H10A-SEH-2B-PG21		
顶部进线 Top entry	螺纹 Thread	型号 Type	低结构 / Low construction
	M20	H10A-TE-2B-M20	
	PG13.5	H10A-TE-2B-PG13.5	
	高结构 / High construction		
	M25	H10A-TE-2B-M25	
	PG16	H10A-TE-2B-PG16	
PG21	H10A-TE-2B-PG21		

下壳底座 Housings

外壳底座: 开孔安装 Bulkhead: Mounted	螺纹 Thread	型号 Type	带保护盖 With protection covers
	不带保护盖 Without protection covers		
	带保护盖 With protection covers		
外壳底座: 表面安装 Surface mounted: Side entry	螺纹 Thread	型号 Type	不带保护盖 Without protection covers
	M20	H10A-SF-1L-M20	
	2M20	H10A-SF-1L-2M20	
	M25	H10A-SF-1L-M25	
	PG16	H10A-SF-1L-PG16	
	2PG16	H10A-SF-1L-2PG16	
	PG21	H10A-SF-1L-PG21	
	带塑料盖 With plastic cover		
	M20	H10A-SF-1L-CV-M20	
	2M20	H10A-SF-1L-CV-2M20	
	M25	H10A-SF-1L-CV-M25	
	PG16	H10A-SF-1L-CV-PG16	
	2PG16	H10A-SF-1L-CV-2PG16	
	带金属盖 With metal cover		
	M20	H10A-SF-1L-MCV-M20	
	2M20	H10A-SF-1L-MCV-2M20	
	M25	H10A-SF-1L-MCV-M25	
	PG16	H10A-SF-1L-MCV-PG16	
	2PG16	H10A-SF-1L-MCV-2PG16	
PG21	H10A-SF-1L-MCV-PG21		

防护等级 Degree of protection: IP65

上壳 Hoods

侧面进线 Side entry	螺纹 Thread	型号 Type	低结构 / Low construction
	M20	H16A-SE-2B-M20	
	PG16	H16A-SE-2B-PG16	
	高结构 / High construction		
	M25	H16A-SEH-2B-M25	
	PG16	H16A-SEH-2B-PG16	
PG21	H16A-SEH-2B-PG21		
顶部进线 Top entry	螺纹 Thread	型号 Type	低结构 / Low construction
	M20	H16A-TE-2B-M20	
	PG16	H16A-TE-2B-PG16	
	高结构 / High construction		
	M25	H16A-TEH-2B-M25	
	PG16	H16A-TEH-2B-PG16	
PG21	H16A-TEH-2B-PG21		

下壳底座 Housings

外壳底座: 开孔安装 Bulkhead: Mounted	螺纹 Thread	型号 Type	带保护盖 With protection covers
	不带保护盖 Without protection covers		
	带保护盖 With protection covers		
外壳底座: 表面安装 Surface mounted: Side entry	螺纹 Thread	型号 Type	不带保护盖 Without protection covers
	M20	H16A-SF-1L-M20	
	2M20	H16A-SF-1L-2M20	
	M25	H16A-SF-1L-M25	
	2M25	H16A-SF-1L-2M25	
	PG16	H16A-SF-1L-PG16	
	2PG16	H16A-SF-1L-2PG16	
	带塑料盖 With plastic cover		
	M20	H16A-SF-1L-CV-M20	
	2M20	H16A-SF-1L-CV-2M20	
	M25	H16A-SF-1L-CV-M25	
	2M25	H16A-SF-1L-CV-2M25	
	PG16	H16A-SF-1L-CV-PG16	
	带金属盖 With metal cover		
	M20	H16A-SF-1L-MCV-M20	
	2M20	H16A-SF-1L-MCV-2M20	
	M25	H16A-SF-1L-MCV-M25	
	2M25	H16A-SF-1L-MCV-2M25	
	PG16	H16A-SF-1L-MCV-PG16	
2PG16	H16A-SF-1L-MCV-2PG16		
PG21	H16A-SF-1L-MCV-PG21		

防护等级 Degree of protection: IP65

上壳 Hoods

侧面进线 Side entry	螺纹 Thread	型号 Type	
	PG21	H32A-SEH-4B-PG21	
	PG29	H32A-SEH-4B-PG29	
	M25	H32A-SEH-4B-M25	
	M32	H32A-SEH-4B-M32	

外壳上壳: 顶部进线 Hood: Top entry	螺纹 Thread	型号 Type	
	PG21	H32A-TEH-4B-PG21	
	PG29	H32A-TEH-4B-PG29	
	M25	H32A-TEH-4B-M25	
	M32	H32A-TEH-4B-M32	

下壳底座 Housings

不封底下壳 Bulkhead mounting	螺纹 Thread	型号 Type	
	---	H32A-BK-2L	

封底下壳 Surface mounting	螺纹 Thread	型号 Type	
	M25	H32A-SF-2L-M25	
	M32	H32A-SF-2L-M32	
	2M32	H32A-SF-2L-2M32	
	PG21	H32A-SF-2L-PG21	
	2PG21	H32A-SF-2L-2PG21	
	PG29	H32A-SF-2L-PG29	
	2PG29	H32A-SF-2L-2PG29	

塑料防护盖 4卡扣 Protection covers Plastic cover 4 clamps	接线方式	描述 Applications	型号 Type	
		用于上壳	H32A-CV-4C	

塑料防护盖 Plastic cover	接线方式	描述 Applications	型号 Type	
	○	用于电缆对接	H32A-CV-4B/1	
	⊙	用于下壳	H32A-CV-4B/2	

防护等级 Degree of protection: IP65

上壳 Hoods

侧面进线 Side entry	螺纹 Thread	型号 Type	
	PG13.5	H6B-SE-2B-PG13.5	
	PG16	H6B-SE-2B-PG16	
	M20	H6B-SE-2B-M20	
	M25	H6B-SE-2B-M25	

侧面进线 Side entry	螺纹 Thread	型号 Type	
	PG21	H6B-SEH-2B-PG21	
	PG29	H6B-SEH-2B-PG29	
	M25	H6B-SEH-2B-M25	
	M32	H6B-SEH-2B-M32	

顶部进线 Top entry	螺纹 Thread	型号 Type	
	PG13.5	H6B-TE-2B-PG13.5	
	PG16	H6B-TE-2B-PG16	
	M20	H6B-TE-2B-M20	

顶部进线 Top entry	螺纹 Thread	型号 Type	
	PG21	H6B-TEH-2B-PG21	
	PG29	H6B-TEH-2B-PG29	
	M25	H6B-TEH-2B-M25	
	M32	H6B-TEH-2B-M32	

下壳底座 Housings

外壳底座: 开孔安装 Bulkhead: Mounted	螺纹 Thread	型号 Type	
	M20	H6B-SF-1L-M20	
	2M20	H6B-SF-1L-2M20	
	M25	H6B-SF-1L-M25	
	2M25	H6B-SF-1L-2M25	
	PG16	H6B-SF-1L-PG16	
	2PG16	H6B-SF-1L-2PG16	
		带塑料盖 With plastic cover	
	M20	H6B-SF-1L-CV-M20	
	2M20	H6B-SF-1L-CV-2M20	
	M25	H6B-SF-1L-CV-M25	
	2M25	H6B-SF-1L-CV-2M25	
	PG16	H6B-SF-1L-CV-PG16	
	2PG16	H6B-SF-1L-CV-2PG16	
		带金属盖 With metal cover	
	M20	H6B-SF-1L-MCV-M20	
	2M20	H6B-SF-1L-MCV-2M20	
	M25	H6B-SF-1L-MCV-M25	
	2M25	H6B-SF-1L-MCV-2M25	
	PG16	H6B-SF-1L-MCV-PG16	
	2PG16	H6B-SF-1L-MCV-2PG16	


防护等级 Degree of protection: IP65

下壳底座 Housings

外壳底座: 表面安装 Surface mounted: Side entry




螺纹 Thread	型号 Type
---	H6B-BK-1L
---	带塑料盖 With plastic cover
---	H6B-BK-1L-CV
---	带金属盖 With metal cover
---	H6B-BK-1L-MCV

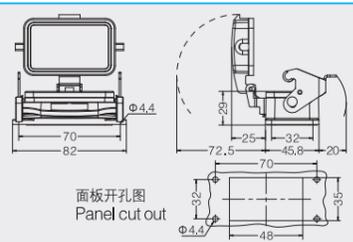

外壳底座: 表面安装 Surface mounted: Side entry




螺纹 Thread	型号 Type
M25	H6B-SFH-1L-M25
2M25	H6B-SFH-1L-2M25
M32	H6B-SFH-1L-M32
2M32	H6B-SFH-1L-2M32
PG21	H6B-SFH-1L-PG21
2PG21	H6B-SFH-1L-2PG21
PG29	H6B-SFH-1L-PG29
2PG29	H6B-SFH-1L-2PG29
---	带塑料盖 With plastic cover
M25	H6B-SF-1L-CV-M25
2M25	H6B-SF-1L-CV-2M25
M32	H6B-SF-1L-CV-M32
2M32	H6B-SF-1L-CV-2M32
PG21	H6B-SF-1L-CV-PG21
2PG21	H6B-SF-1L-CV-2PG21
PG29	H6B-SF-1L-CV-PG29
2PG29	H6B-SF-1L-CV-2PG29
---	带金属盖 With metal cover
M25	H6B-SF-1L-CV-M25
2M25	H6B-SF-1L-CV-2M25
M32	H6B-SF-1L-CV-M32
2M32	H6B-SF-1L-CV-2M32
PG21	H6B-SF-1L-CV-PG21
2PG21	H6B-SF-1L-CV-2PG21
PG29	H6B-SF-1L-CV-PG29
2PG29	H6B-SF-1L-CV-2PG29

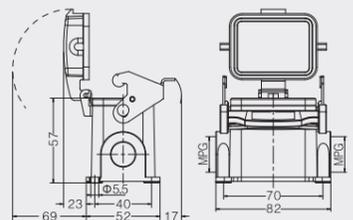

飞线下壳 Housings Cable to cable




螺纹 Thread	型号 Type
M20	H6B-CCT-1L-M20
M25	H6B-CCT-1L-M25
PG13.5	H6B-CCT-1L-PG13.5
PG16	H6B-CCT-1L-PG16

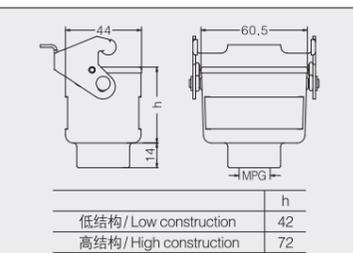

飞线下壳 Housings Cable to cable




螺纹 Thread	型号 Type
M13.5	H6B-CCTH-1L-M13.5
M20	H6B-CCTH-1L-M20
M25	H6B-CCTH-1L-M25
PG21	H6B-CCTH-1L-PG21
PG29	H6B-CCTH-1L-PG29

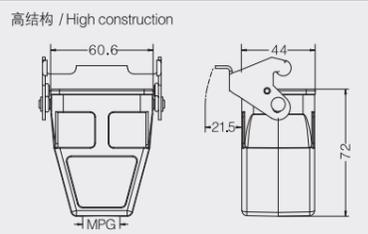

底座保护盖 Protection covers for housings



螺纹 Thread	型号 Type
---	H6B-CV-2C




防护等级 Degree of protection: IP65

上壳 Hoods

侧面进线 Side entry




螺纹 Thread	型号 Type
M20	H10B-SE-4B-M20
M25	H10B-SE-4B-M25
PG16	H10B-SE-4B-PG16

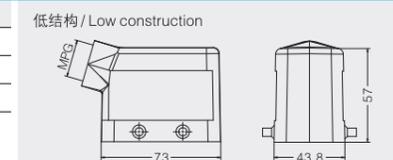

侧面进线 Side entry




螺纹 Thread	型号 Type
M20	H10B-SEH-4B-M20
M25	H10B-SEH-4B-M25
M32	H10B-SEH-4B-M32
PG16	H10B-SEH-4B-PG16
PG21	H10B-SEH-4B-PG21
PG29	H10B-SEH-4B-PG29

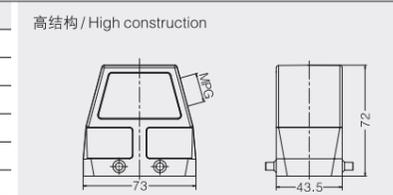

顶部进线 Top entry




螺纹 Thread	型号 Type
M20	H10B-TE-4B-M20
M25	H10B-TE-4B-M25
PG16	H10B-TE-4B-PG16

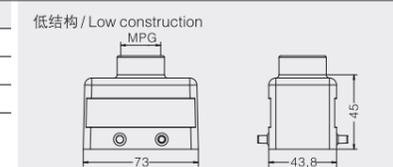

顶部进线 Top entry



螺纹 Thread	型号 Type
M20	H10B-TEH-4B-M20
M25	H10B-TEH-4B-M25
M32	H10B-TEH-4B-M32
PG16	H10B-TEH-4B-PG16
PG21	H10B-TEH-4B-PG21
PG29	H10B-TEH-4B-PG29

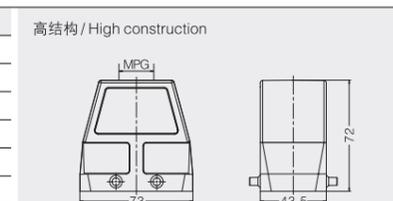


下壳底座 Housings

不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type
---	H10B-BK-2L

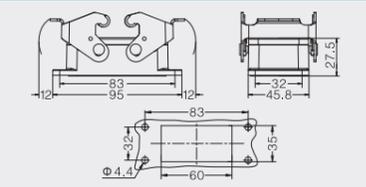

封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type
M20	H10B-SF-2L-M20
2M20	H10B-SF-2L-2M20
M25	H10B-SF-2L-M25
2M25	H10B-SF-2L-2M25
PG16	H10B-SF-2L-PG16
2PG16	H10B-SF-2L-2PG16

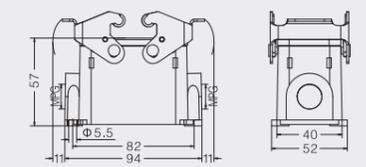

飞线下壳 Housings Cable to cable



螺纹 Thread	型号 Type
M20	HV10B-CCT-1L-M20
PG16	HV10B-CCT-1L-PG16

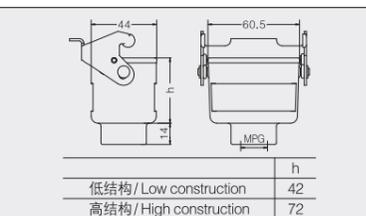

防护等级 Degree of protection: IP65


下壳底座 Housings

飞线下壳 Housings Cable to cable



螺纹 Thread	型号 Type
M25	H10B-CCTH-1L-M25
M32	H10B-CCTH-1L-M32
PG21	H10B-CCTH-1L-PG21
PG29	H10B-CCTH-1L-PG29

高结构 / High construction




上壳 Hoods

侧出带双扣上壳 Side entry housing with two levers




螺纹 Thread	型号 Type
M20	H10B-SE-2L-M20
M25	H10B-SE-2L-M25
PG16	H10B-SE-2L-PG16



顶出带双扣上壳 Top entry housing with two levers



螺纹 Thread	型号 Type
PG16	H10B-TE-2L-PG16
M20	H10B-TE-2L-M20
M25	H10B-TE-2L-M25




下壳底座 / Housings

4耳带盖开孔底座 Bulkhead mounted with 4 bolts




螺纹 Thread	型号 Type
---	H10B-BK-4B
---	带塑料盖 With plastic cover
---	H10B-BK-4B-CV
---	带金属盖 With metal cover
---	H10B-BK-4B-MCV



4耳带盖表面安装底座 Surface mounting with 4 bolts



螺纹 Thread	型号 Type
M20	H10B-SF-4B-M20
2M20	H10B-SF-4B-2M20
M25	H10B-SF-4B-M25
2M25	H10B-SF-4B-2M25
PG16	H10B-SF-4B-PG16
2PG16	H10B-SF-4B-2PG16
---	带塑料盖 With plastic cover
M20	H10B-SF-4B-CV-M20
2M20	H10B-SF-4B-CV-2M20
M25	H10B-SF-4B-CV-M25
2M25	H10B-SF-4B-CV-2M25
PG16	H10B-SF-4B-CV-PG16
2PG16	H10B-SF-4B-CV-2PG16
---	带金属盖 With metal cover
M20	H10B-SF-4B-MCV-M20
2M20	H10B-SF-4B-MCV-2M20
M25	H10B-SF-4B-MCV-M25
2M25	H10B-SF-4B-MCV-2M25
PG16	H10B-SF-4B-MCV-PG16
2PG16	H10B-SF-4B-MCV-2PG16



防护等级 Degree of protection: IP65


上壳 Hoods

侧面进线 Side entry



螺纹 Thread	型号 Type
M20	H10B-SE-2B-M20
M25	H10B-SE-2B-M25
PG16	H10B-SE-2B-PG16

低结构 / Low construction




侧面进线 Side entry



螺纹 Thread	型号 Type
M20	H10B-SEH-2B-M20
M25	H10B-SEH-2B-M25
M32	H10B-SEH-2B-M32
PG13.5	H10B-SEH-2B-PG13.5
PG21	H10B-SEH-2B-PG21
PG29	H10B-SEH-2B-PG29

高结构 / High construction




顶部进线 Top entry



螺纹 Thread	型号 Type
M20	H10B-TE-2B-M20
M25	H10B-TE-2B-M25
PG16	H10B-TE-2B-PG16

低结构 / Low construction




顶部进线 Top entry



螺纹 Thread	型号 Type
M20	HV10B-TEH-2B-M20
M25	HV10B-TEH-2B-M25
M32	HV10B-TEH-2B-M32
PG13.5	HV10B-TEH-2B-PG13.5
PG16	HV10B-TEH-2B-PG16
PG21	HV10B-TEH-2B-PG21
PG29	HV10B-TEH-2B-PG29

高结构 / High construction




下壳底座 / Housings

不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type
---	H10B-BK-1L
---	带塑料盖 With plastic cover
---	H10B-BK-1L-CV
---	带金属盖 With metal cover
---	H10B-BK-1L-MCV

带保护盖 / With protection covers

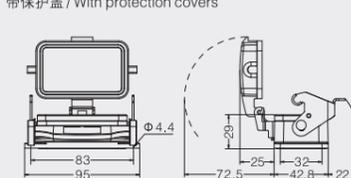


封底下壳 Housings, surface mounting



螺纹 Thread	型号 Type
M20	H10B-SF-1L-M20
2M20	H10B-SF-1L-2M20
M25	H10B-SF-1L-M25
2M25	H10B-SF-1L-2M25
PG16	H10B-SF-1L-PG16
2PG16	H10B-SF-1L-2PG16
---	带塑料盖 With plastic cover
M20	H10B-SF-1L-CV-M20
2M20	H10B-SF-1L-CV-2M20
M25	H10B-SF-1L-CV-M25
2M25	H10B-SF-1L-CV-2M25
PG16	H10B-SF-1L-CV-PG16
2PG16	H10B-SF-1L-CV-2PG16
---	带金属盖 With metal cover
M20	H10B-SF-1L-MCV-M20
2M20	H10B-SF-1L-MCV-2M20
M25	H10B-SF-1L-MCV-M25
2M25	H10B-SF-1L-MCV-2M25
PG16	H10B-SF-1L-MCV-PG16
2PG16	H10B-SF-1L-MCV-2PG16


带保护盖 / With protection covers

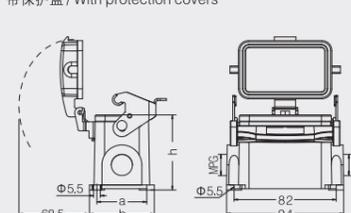



	a	b	h
低结构 / Low construction	40	52	54
高结构 / High construction	45	57	74


防护等级 Degree of protection: IP65

上壳 Hoods


侧面进线 Side entry 	螺纹 Thread	型号 Type	低结构 / Low construction 
	M25	H16B-SE-4B-M25	
	M32	H16B-SE-4B-M32	
	PG21	H16B-SE-4B-PG21	


侧面进线 Side entry 	螺纹 Thread	型号 Type	高结构 / High construction 
	M32	H16B-SEH-4B-M32	
	M40	H16B-SEH-4B-M40	
	PG21	H16B-SEH-4B-PG21	
PG29	H16B-SEH-4B-PG29		

顶部进线 Top entry 	螺纹 Thread	型号 Type	低结构 / Low construction 
	M25	H16B-TE-4B-M25	
	M32	H16B-TE-4B-M32	
	PG21	H16B-TE-4B-PG21	


顶部进线 Top entry 	螺纹 Thread	型号 Type	高结构 / High construction 
	M32	H16B-TEH-4B-M32	
	M40	H16B-TEH-4B-M40	
	PG21	H16B-TEH-4B-PG21	
PG29	H16B-TEH-4B-PG29		

下壳底座 Housings

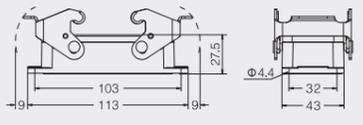不封底下壳 Housings, bulkhead mounting 	螺纹 Thread	型号 Type	
	---	H16B-BK-2L	

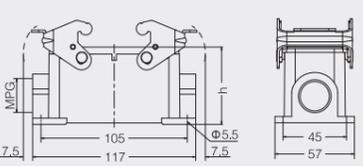
封底下壳 Housings, surface mounting 	螺纹 Thread	型号 Type	
	M25	H16B-SF-2L-M25	
	2M25	H16B-SF-2L-2M25	
	PG21	H16B-SF-2L-PG21	
	2PG21	H16B-SF-2L-2PG21	

低结构 / Low construction	h
高结构 / High construction	81

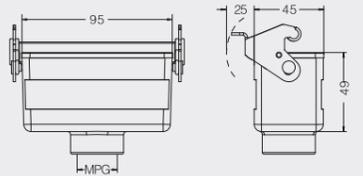
飞线下壳 Housings Cable to cable 	螺纹 Thread	型号 Type	
	M25	HV16B-CCT-1L-M25	
	M32	HV16B-CCT-1L-M32	
	PG21	HV16B-CCT-1L-PG21	


防护等级 Degree of protection: IP65

下壳底座 Housings


飞线下壳 Housings Cable to cable 	螺纹 Thread	型号 Type	高结构 / High construction 
	M32	HV16B-CCTH-1L-M32	
	M40	HV16B-CCTH-1L-M40	
	PG21	HV16B-CCTH-1L-PG21	
	PG29	HV16B-CCTH-1L-PG29	


上壳 Hoods

侧出带双扣上壳 Side entry housing with two levers 	螺纹 Thread	型号 Type	
	M25	H16B-SE-2L-M25	
	M32	H16B-SE-2L-M32	
	PG21	H16B-SE-2L-PG21	

顶出带双扣上壳 Top entry housing with two levers 	螺纹 Thread	型号 Type	
	M25	H16B-TE-2L-M25	
	M32	H16B-TE-2L-M32	
	PG21	H16B-TE-2L-PG21	


下壳底座 / Housings


4耳带盖开孔底座 Bulkhead mounted with 4 bolts 	螺纹 Thread	型号 Type	
	---	H16B-BK-4B	
	---	带塑料盖 With plastic cover H16B-BK-4B-CV	
	---	带金属盖 With metal cover H16B-BK-4B-MCV	


4耳带盖表面安装底座 Surface mounting with 4 bolts 	螺纹 Thread	型号 Type	
	M25	H16B-SF-4B-M25	
	2M25	H16B-SF-4B-2M25	
	PG21	H16B-SF-4B-PG21	
	2PG21	H16B-SF-4B-2PG21	
	---	带塑料盖 With plastic cover H16B-SF-4B-CV-M25	
	---	带塑料盖 With plastic cover H16B-SF-4B-CV-2M25	
	---	带塑料盖 With plastic cover H16B-SF-4B-CV-PG21	
	---	带塑料盖 With plastic cover H16B-SF-4B-CV-2PG21	
	---	带金属盖 With metal cover H16B-SF-4B-MCV-M25	
	---	带金属盖 With metal cover H16B-SF-4B-MCV-2M25	
	---	带金属盖 With metal cover H16B-SF-4B-MCV-PG21	
---	带金属盖 With metal cover H16B-SF-4B-MCV-2PG21		


防护等级 Degree of protection: IP65

上壳 Hoods


侧面进线 Side entry 	螺纹 Thread	型号 Type	低结构 / Low construction 
	M25	H16B-SE-2B-M25	
	M32	H16B-SE-2B-M32	
	PG21	H16B-SE-2B-PG21	


侧面进线 Side entry 	螺纹 Thread	型号 Type	高结构 / High construction 
	M32	H16B-SEH-2B-M32	
	M40	H16B-SEH-2B-M40	
	PG21	H16B-SEH-2B-PG21	
	PG29	H16B-SEH-2B-PG29	

顶部进线 Top entry 	螺纹 Thread	型号 Type	低结构 / Low construction 
	M25	H16B-TE-2B-M25	
	M32	H16B-TE-2B-M32	
	PG21	H16B-TE-2B-PG21	

顶部进线 Top entry 	螺纹 Thread	型号 Type	高结构 / High construction 
	M32	H16B-TEH-2B-M32	
	M40	H16B-TEH-2B-M40	
	PG21	H16B-TEH-2B-PG21	
	PG29	H16B-TEH-2B-PG29	


下壳底座 / Housings


不封底下壳 Housings, bulkhead mounting 	螺纹 Thread	型号 Type	
	---	H16B-BK-1L	
	---	带塑料盖 With plastic cover H16B-BK-1L-CV	
	---	带金属盖 With metal cover H16B-BK-1L-MCV	


封底下壳 Housings, surface mounting 	螺纹 Thread	型号 Type	
	M25	H16B-SF-1L-M25	
	2M25	H16B-SF-1L-2M25	
	PG21	H16B-SF-1L-PG21	
	2PG21	H16B-SF-1L-2PG21	
	M25	带塑料盖 With plastic cover H16B-SF-1L-CV-M25	
	2M25	H16B-SF-1L-CV-2M25	
	PG21	H16B-SF-1L-CV-PG21	
	2PG21	H16B-SF-1L-CV-2PG21	
	M25	带金属盖 With metal cover H16B-SF-1L-MCV-M25	
	2M25	H16B-SF-1L-MCV-2M25	
	PG21	H16B-SF-1L-MCV-PG21	
2PG21	H16B-SF-1L-MCV-2PG21		


防护等级 Degree of protection: IP65

上壳 Hoods


侧面进线 Side entry 	螺纹 Thread	型号 Type	低结构 / Low construction 
	M25	H24B-SE-4B-M25	
	M32	H24B-SE-4B-M32	
	PG21	H24B-SE-4B-PG21	


侧面进线 Side entry 	螺纹 Thread	型号 Type	高结构 / High construction 
	M32	H24B-SEH-4B-M32	
	M40	H24B-SEH-4B-M40	
	PG21	H24B-SEH-4B-PG21	
	PG29	H24B-SEH-4B-PG29	


顶部进线 Top entry 	螺纹 Thread	型号 Type	低结构 / Low construction 
	M25	H24B-TE-4B-M25	
	M32	H24B-TE-4B-M32	
	PG21	H24B-TE-4B-PG21	

顶部进线 Top entry 	螺纹 Thread	型号 Type	高结构 / High construction 
	M32	H24B-TEH-4B-M32	
	M40	H24B-TEH-4B-M40	
	PG21	H24B-TEH-4B-PG21	
	PG29	H24B-TEH-4B-PG29	

下壳底座 Housings

不封底下壳 Bulkhead mounting 	螺纹 Thread	型号 Type	
	---	H24B-BK-2L	

封底下壳 Surface mounting 	螺纹 Thread	型号 Type	
	M25	H24B-SF-2L-M25	
	2M25	H24B-SF-2L-2M25	
	PG21	H24B-SF-2L-PG21	
	2PG21	H24B-SF-2L-2PG21	

飞线下壳 Housings Cable to cable 	螺纹 Thread	型号 Type	
	M25	H24B-CCT-1L-M25	
	M32	H24B-CCT-1L-M32	
	PG21	H24B-CCT-1L-PG21	
	PG29	H24B-CCT-1L-PG29	

防护等级 Degree of protection: IP65


下壳底座 Housings

飞线下壳 Housings Cable to cable



螺纹 Thread	型号 Type
M32	H24B-CCTH-1L-M32
M40	H24B-CCTH-1L-M40
PG21	H24B-CCTH-1L-PG21
PG29	H24B-CCTH-1L-PG29

高结构 / High construction

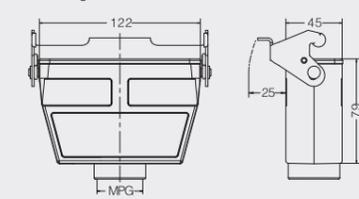


上壳 Hoods

侧出带双扣上壳 Side entry housing with two levers




螺纹 Thread	型号 Type
M25	H24B-SE-2L-M25
M32	H24B-SE-2L-M32
PG21	H24B-SE-2L-PG21

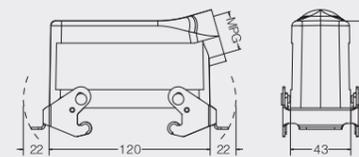

顶出带双扣上壳 Top entry housing with two levers



螺纹 Thread	型号 Type
M25	H24B-TE-2L-M25
M32	H24B-TE-2L-M32
PG21	H24B-TE-2L-PG21
PG29	H24B-TE-2L-PG29

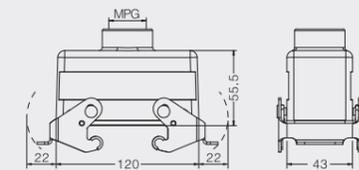


下壳底座 / Housings

4耳带盖开孔底座 Bulkhead mounted with 4 bolts




螺纹 Thread	型号 Type
---	H24B-BK-4B
---	带塑料盖 With plastic cover
---	H24B-BK-4B-CV
---	带金属盖 With metal cover
---	H24B-BK-4B-MCV

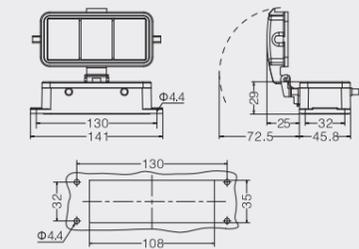

4耳带盖表面安装底座 Surface mounting with 4 bolts



螺纹 Thread	型号 Type
M25	H24B-SF-4B-M25
2M25	H24B-SF-4B-2M25
PG21	H24B-SF-4B-PG21
2PG21	H24B-SF-4B-2PG21
	带塑料盖 With plastic cover
M25	H24B-SF-4B-CV-M25
2M25	H24B-SF-4B-CV-2M25
PG21	H24B-SF-4B-CV-PG21
2PG21	H24B-SF-4B-CV-2PG21
	带金属盖 With metal cover
M25	H24B-SF-4B-MCV-M25
2M25	H24B-SF-4B-MCV-2M25
PG21	H24B-SF-4B-MCV-PG21
2PG21	H24B-SF-4B-MCV-2PG21

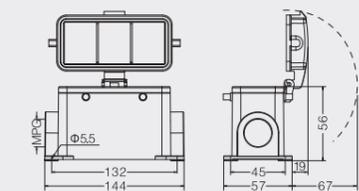

防护等级 Degree of protection: IP65


上壳 Hoods

侧面进线 Side entry



螺纹 Thread	型号 Type
M25	H24B-SE-2B-M25
M32	H24B-SE-2B-M32
PG21	H24B-SE-2B-PG21

低结构 / Low construction

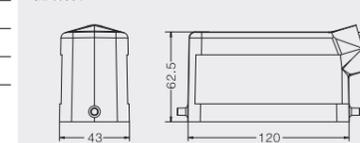


侧面进线 Side entry



螺纹 Thread	型号 Type
M32	H24B-SEH-2B-M32
M40	H24B-SEH-2B-M40
PG21	H24B-SEH-2B-PG21
PG29	H24B-SEH-2B-PG29
PG36	H24B-SEH-2B-PG36

高结构 / High construction

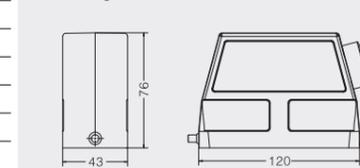


顶部进线 Top entry



螺纹 Thread	型号 Type
M25	H24B-TE-2B-M25
M32	H24B-TE-2B-M32
PG21	H24B-TE-2B-PG21
PG29	H24B-TE-2B-PG29

低结构 / Low construction

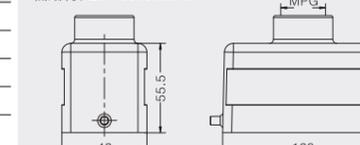


顶部进线 Top entry



螺纹 Thread	型号 Type
M32	H24B-TEH-2B-M32
M40	H24B-TEH-2B-M40
PG21	H24B-TEH-2B-PG21
PG29	H24B-TEH-2B-PG29
PG36	H24B-TEH-2B-PG36

高结构 / High construction

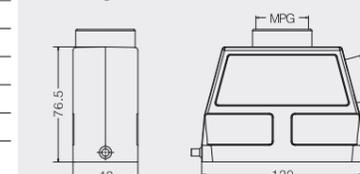


下壳底座 / Housings

不封底下壳 Housings, bulkhead mounting



螺纹 Thread	型号 Type
---	H24B-BK-1L
---	带塑料盖 With plastic cover
---	H24B-BK-1L-CV
---	带金属盖 With metal cover
---	H24B-BK-1L-MCV

带保护盖 / With protection covers

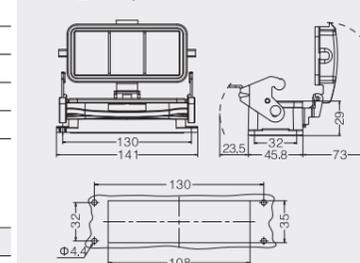


封底下壳 Housings, surface mounting



螺纹 Thread	型号 Type
M25	H24B-SF-1L-M25
2M25	H24B-SF-1L-2M25
PG21	H24B-SF-1L-PG21
2PG21	H24B-SF-1L-2PG21
	带塑料盖 With plastic cover
M25	H24B-SF-1L-CV-M25
2M25	H24B-SF-1L-CV-2M25
PG21	H24B-SF-1L-CV-PG21
2PG21	H24B-SF-1L-CV-2PG21
	带金属盖 With metal cover
M25	H24B-SF-1L-MCV-M25
2M25	H24B-SF-1L-MCV-2M25
PG21	H24B-SF-1L-MCV-PG21
2PG21	H24B-SF-1L-MCV-2PG21

带保护盖 / With protection covers

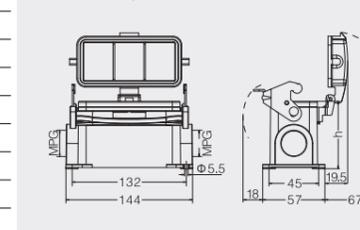

	h
低结构 / Low construction	56
高结构 / High construction	81


防护等级 Degree of protection: IP65

上壳 Hoods

侧出线 Side entry




螺纹 Thread	型号 Type
M32	H32B-SE-4B-M32
M40	H32B-SE-4B-M40
M50	H32B-SE-4B-M50
PG29	H32B-SE-4B-PG29
PG36	H32B-SE-4B-PG36
PG42	H32B-SE-4B-PG42



顶出线 Top entry



螺纹 Thread	型号 Type
M32	H32B-TE-4B-M32
M40	H32B-TE-4B-M40
M50	H32B-TE-4B-M50
PG29	H32B-TE-4B-PG29
PG36	H32B-TE-4B-PG36
PG42	H32B-TE-4B-PG42




下壳底座 Housings

不封底下壳 Housings, bulkhead mounting




螺纹 Thread	型号 Type
---	H32B-BK-2L

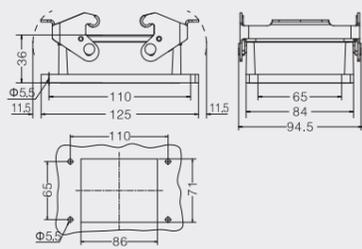

封底下壳 Housings, surface mounting




螺纹 Thread	型号 Type
M32	H32B-SF-2L-M25
2M32	H32B-SF-2L-2M25
M40	H32B-SF-2L-M40
2M40	H32B-SF-2L-2M40
PG29	H32B-SF-2L-PG29
2PG29	H32B-SF-2L-2PG29
PG36	H32B-SF-2L-PG36
2PG36	H32B-SF-2L-2PG36
3PG42	H32B-SF-2L-2PG42

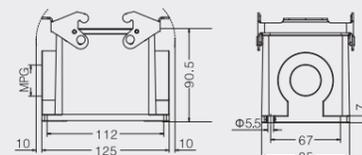

顶出线 Top entry




螺纹 Thread	型号 Type
M32	H32B-CCT-2L-M32
M40	H32B-CCT-2L-M40
PG29	H32B-CCT-2L-PG29
PG36	H32B-CCT-2L-PG36
PG42	H32B-CCT-2L-PG42

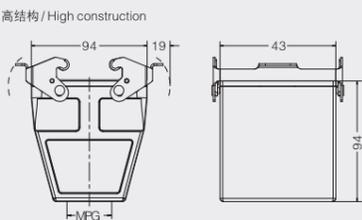

飞线下壳 Housings Cable to cable



螺纹 Thread	型号 Type
---	H32B-MCV-4B/2

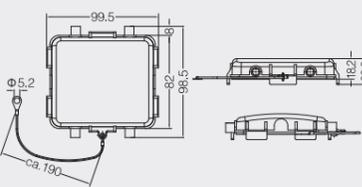


防护等级 Degree of protection: IP65

上壳 Hoods

侧出线 Side entry




螺纹 Thread	型号 Type
M32	HV32B-SE-2B-M32
PG29	HV32B-SE-2B-PG29
PG36	HV32B-SE-2B-PG36
PG42	HV32B-SE-2B-PG42



顶出线 Top entry



螺纹 Thread	型号 Type
M32	H32B-TE-2B-M32
M40	H32B-TE-2B-M40
M50	H32B-TE-2B-M50
PG29	H32B-TE-2B-PG29
PG36	H32B-TE-2B-PG36
PG42	H32B-TE-2B-PG42




下壳底座 Housings

不封底下壳 Bulkhead mounting




螺纹 Thread	型号 Type
---	HV32B-BK-1L
---	带塑料盖 With plastic cover
---	HV32B-BK-1L-CV
---	带金属盖 With metal cover
---	HV32B-BK-1L-MCV

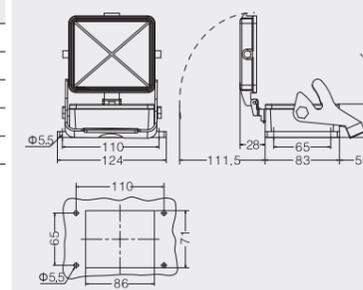


封底下壳 Surface mounting



螺纹 Thread	型号 Type
M32	HV32B-SF-1L-M32
2M32	HV32B-SF-1L-2M32
M40	HV32B-SF-1L-M40
2M40	HV32B-SF-1L-2M40
PG29	HV32B-SF-1L-PG29
2PG29	HV32B-SF-1L-2PG29
PG36	HV32B-SF-1L-PG36
2PG36	HV32B-SF-1L-2PG36

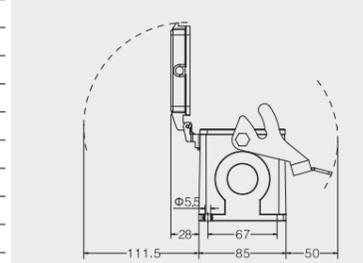

螺纹 Thread	型号 Type
---	带塑料盖 With plastic cover
M32	HV32B-SF-1L-CV-M32
2M32	HV32B-SF-1L-CV-2M32
M40	HV32B-SF-1L-CV-M40
2M40	HV32B-SF-1L-CV-2M40
PG29	HV32B-SF-1L-CV-PG29
2PG29	HV32B-SF-1L-CV-2PG29
PG36	HV32B-SF-1L-CV-PG36
2PG36	HV32B-SF-1L-CV-2PG36

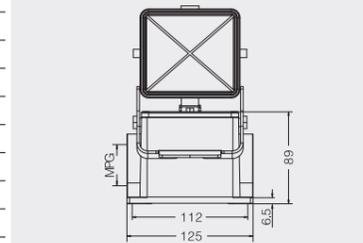

螺纹 Thread	型号 Type
---	带金属盖 With metal cover
M32	HV32B-SF-1L-MCV-M32
2M32	HV32B-SF-1L-MCV-2M32
M40	HV32B-SF-1L-MCV-M40
2M40	HV32B-SF-1L-MCV-2M40
PG29	HV32B-SF-1L-MCV-PG29
2PG29	HV32B-SF-1L-MCV-2PG29
PG36	HV32B-SF-1L-MCV-PG36
2PG36	HV32B-SF-1L-MCV-2PG36


防护等级 Degree of protection: IP65

上壳 Hoods

侧出线 Side entry




螺纹 Thread	型号 Type
M32	H48B-SE-2B-M32
M40	H48B-SE-2B-M40
M50	H48B-SE-2B-M50
PG29	H48B-SE-2B-PG29
PG36	H48B-SE-2B-PG36
PG42	H48B-SE-2B-PG42

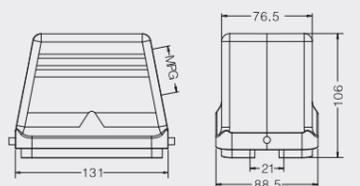

顶出线 Top entry



螺纹 Thread	型号 Type
M32	H48B-TE-2B-M32
M40	H48B-TE-2B-M40
M50	H48B-TE-2B-M50
PG29	H48B-TE-2B-PG29
PG36	H48B-TE-2B-PG36
PG42	H48B-TE-2B-PG42

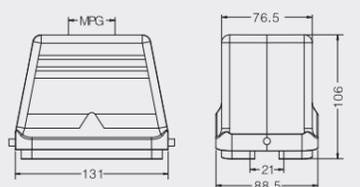


下壳底座 Housings

不封底下壳 Bulkhead mounting





螺纹 Thread	型号 Type
---	H48B-BK-1L
---	带塑料盖 With plastic cover
---	H48B-BK-1L-CV
---	带金属盖 With metal cover
---	H48B-BK-1L-MCV

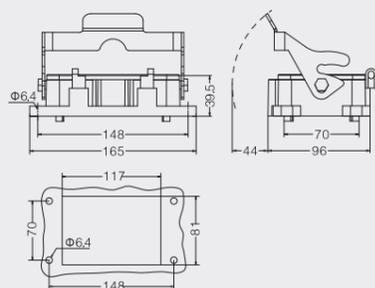

封底下壳 Surface mounting



螺纹 Thread	型号 Type
M32	H48B-SF-1L-M32
2M32	H48B-SF-1L-2M32
M40	H48B-SF-1L-M40
2M40	H48B-SF-1L-2M40
PG29	H48B-SF-1L-PG29
2PG29	H48B-SF-1L-2PG29
PG36	H48B-SF-1L-PG36
2PG36	H48B-SF-1L-2PG36
---	带塑料盖 With plastic cover
M32	H48B-SF-1L-CV-M32
2M32	H48B-SF-1L-CV-2M32
M40	H48B-SF-1L-CV-M40
2M40	H48B-SF-1L-CV-2M40
PG29	H48B-SF-1L-CV-PG29
2PG29	H48B-SF-1L-CV-2PG29
PG36	H48B-SF-1L-CV-PG36
2PG36	H48B-SF-1L-CV-2PG36
---	带金属盖 With metal cover
M32	H48B-SF-1L-MCV-M32
2M32	H48B-SF-1L-MCV-2M32
M40	H48B-SF-1L-MCV-M40
2M40	H48B-SF-1L-MCV-2M40
PG29	H48B-SF-1L-MCV-PG29
2PG29	H48B-SF-1L-MCV-2PG29
PG36	H48B-SF-1L-MCV-PG36
2PG36	H48B-SF-1L-MCV-2PG36




连接头——PG 制与 M 公制对照 Outlets——Cross Reference From PG thread To Metric Thread

对照表相关的 PG 值和公制值

The Cross Reference table shows the correlation between PG value and Metric value.

PG 制与公制所涵盖的范围如下图:

Table below is the ranges covered by PG & Metric:

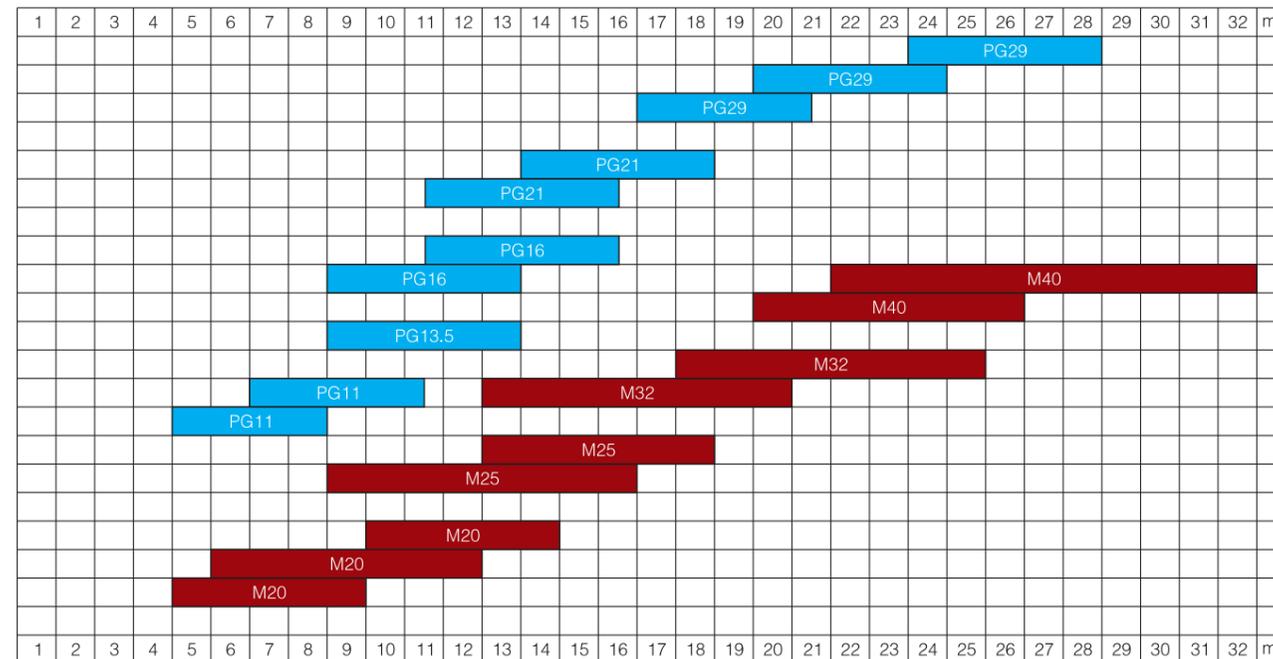


电缆端接头管接头 D21 Cable glands tube connectors



螺纹 Thread	电缆范围 Clamp Rang(mm)	型号 Type	螺纹 Thread	电缆范围 Clamp Rang(mm)	型号 Type
PG11	7-9	D21-11	M24 x 1.5	13-15	D21-24M
PG13.5	9-13	D21-13.5	M27 x 2	13-15	D21-27M
PG16	15-18	D21-16	M30 x 2	15-18	D21-30M
PG21	18-21	D21-21	M33 x 2	18-21	D21-33M
PG29	24-28	D21-29	M36 x 2	21-24	D21-36M
PG36	32-36	D21-36	M42 x 2	24-28	D21-42M
M16 x 1.5	5-7	D21-16M	M24 x 1.5	28-32	D21-24M
M20 x 1.5	7-9	D21-20M			
	9-13				
	9-13	D21-24M			


金属软管接头 (锌合金镀镍) Metal Hose Outlet (Zinc Alloy with Nickel Plate)



Metric Order No. 公制订货代码	PG Order No. PG 制订货代码	I.D Of Hose 所配软管内径 φ (mm)	H (mm)	D (mm)	S 扳钳规格 (mm)
	G11	10	22	26.6	22
M20	G13.5	12	22	30	24
	G16	15	22	33.6	30
M25	G21	20	24	40	36
M32	G29	25	30	51.5	46
M40	G36	32	35	63	55





材 料: 尼龙塑料
密 封 件: 丁腈橡胶(NBR)
防护等级: IP67-5 巴压力
(旋紧部位, 并使用O-密封圈)
环境温度: 静态 -40°C 至 100°C, 短时至 120°C
动态 -20°C 至 80°C, 短时至 100°C
供货颜色: 灰色
黑色
其它颜色请咨询

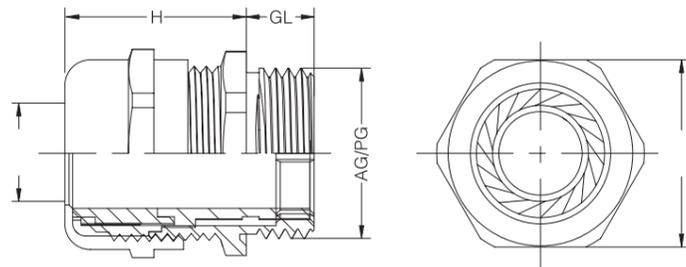

AG PG	∅k mm	GL mm	H mm	⌀ mm
7	3-6.5	8	22	16
7	2-5	8	22	16
9	4-8	8	26	19
9	2-6	8	26	19
11	5-10	8	27	22
11	3-7	8	27	22
13.5	6-12	9	28	24
13.5	5-9	9	28	24
16	10-14	10	30	27
16	7-12	10	30	27
19	12-15	10	30	27/28
19	10-12	10	30	27/28
21	13-18	11	35	33
21	9-16	11	35	33

AG PG	∅k mm	GL mm	H mm	⌀ mm
25	16-21	11	34	35/36
25	13-18	11	34	35/36
29	18-25	12	40	41/42
29	13-20	12	40	41/42
36	22-32	14	48	52/53
36	20-26	14	48	52/53
42	32-38	15	49	60/61
42	25-31	15	49	60/61
48	37-44	15	50	64/65
48	29-35	15	50	64/65
63	42-50	27	60	72

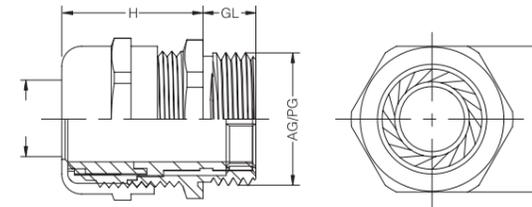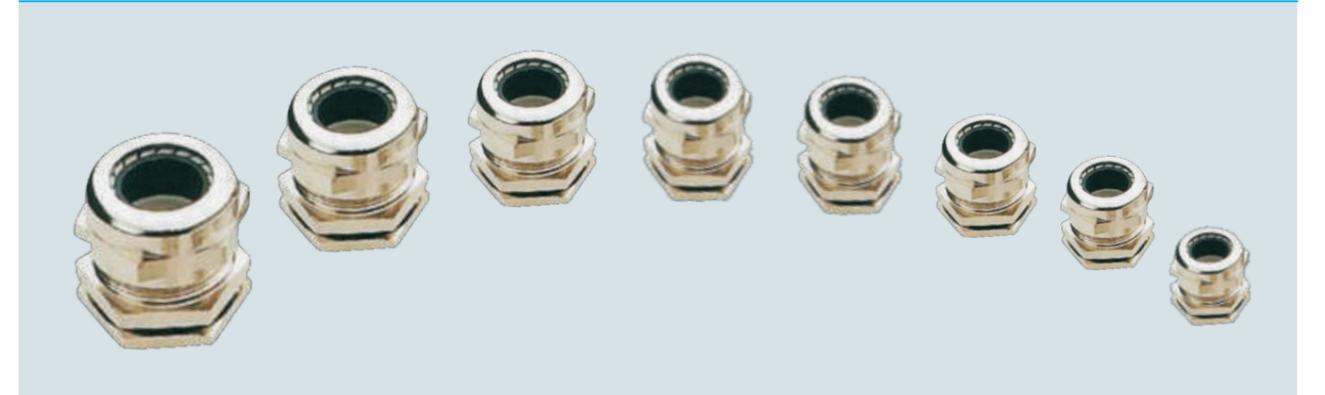

材 料: 尼龙塑料
密 封 件: 丁腈橡胶(NBR)
防护等级: IP67-5 巴压力
(旋紧部位, 并使用O-密封圈)
环境温度: 静态 -40°C 至 100°C, 短时至 120°C
动态 -20°C 至 80°C, 短时至 100°C
供货颜色: 灰色、黑色, 其它颜色请咨询

AG PG	∅k mm	GL mm	GL(加长) mm	H mm	⌀ mm
7	3-6.5	5	10	19	14
7	2-5	5	10	19	14
9	4-8	6	10	20	17
9	2-6	6	10	20	17
11	5-10	6	10	21	20
11	3-7	6	10	21	20
13.5	6-12	6.5	10	22	22
13.5	5-9	6.5	10	22	22
16	10-14	6.5	10	23	24
16	7-12	6.5	10	23	24

AG PG	∅k mm	GL mm	GL(加长) mm	H mm	⌀ mm
21	13-18	7	12	25	30
21	9-16	7	12	25	30
29	18-25	8	12	29	40
29	13-20	8	12	29	40
36	22-32	8	15	35	50
36	20-26	8	15	35	50
42	32-38	9	15	37	57
42	25-31	9	15	37	57
48	37-44	10	15	38	64
48	29-35	10	15	38	64

软管快速接头 Quick Screw Connector



产品材质: PA尼龙;
螺纹规格: 公制螺纹、德制螺纹;
工作温度: -40°C~+110°C;
颜 色: 黑色、其他颜色可以定做;
产品特性: 内锁扣和本体特殊设计, 装卸只需拔插无需工具;
作用方法: 软管接头是软管的配套产品, 可接入设备箱体上, 也可以根据选用
螺纹接入进出口为内螺纹的电动设备上, 只需软管插入接口即可。

德制螺纹 PG Thread

螺纹规格 Thread Size	适配软管 Fits to tubing size (mm)	螺纹长度 GL (mm)	高度 H (mm)
PG7	AD10	8.5	22.5
PG9	AD13	8.5	23
PG11	AD15.8	10	25
PG13.5	18.5	12	25
PG16	21.2	12	28
PG21	28.5	12	31
PG29	34.5	12	33
PG36	42.5	13.5	35.5
PG48	54.5	15	39

公制螺纹 Metric Thread

螺纹规格 Thread Size	适配软管 Fits to tubing size (mm)	螺纹长度 GL (mm)	高度 H (mm)
M12 × 1.5	10	8.5	22.5
M16 × 1.5	13	8.8	23
M18 × 1.5	15.8	10	25
M20 × 1.5	18.5	12	25
M22 × 1.5	21.2	12	28
M24 × 1.5	28.5	12	31
M32 × 1.5	34.5	12	33
M40 × 1.5	42.5	13.5	35.5
M63 × 1.5	54.5	15	39