



CMK系列快速接线端子
CMK SERIES PUSH IN QUICK-CONNECTORS

Material of connectors shell: Transparent polycarbonate

Material of conductive parts: Thinned copper

Material of contact springs: AISI 301 stainless steel

Rated voltage(V): 450V AC

Rated current(A): 24A









Connection capacity: 0.5-2.5mm²


Type of electric connection: Equipotential

Working temperature: -40°C to 85°C

Strip length: 11mm/0.43 Inch



Product Code	Connector type	No. of circuits	Rigid wire mm ²	Volt (V)	Ampere (A)	 Un	 Un
CMK-202		2	0.5→2.5	450 V	24 A	150	9000
CMK-203		3				100	6000
CMK-204		4				100	6000
CMK-205		5				100	6000
CMK-206		6				50	3000
CMK-208		8				50	3000

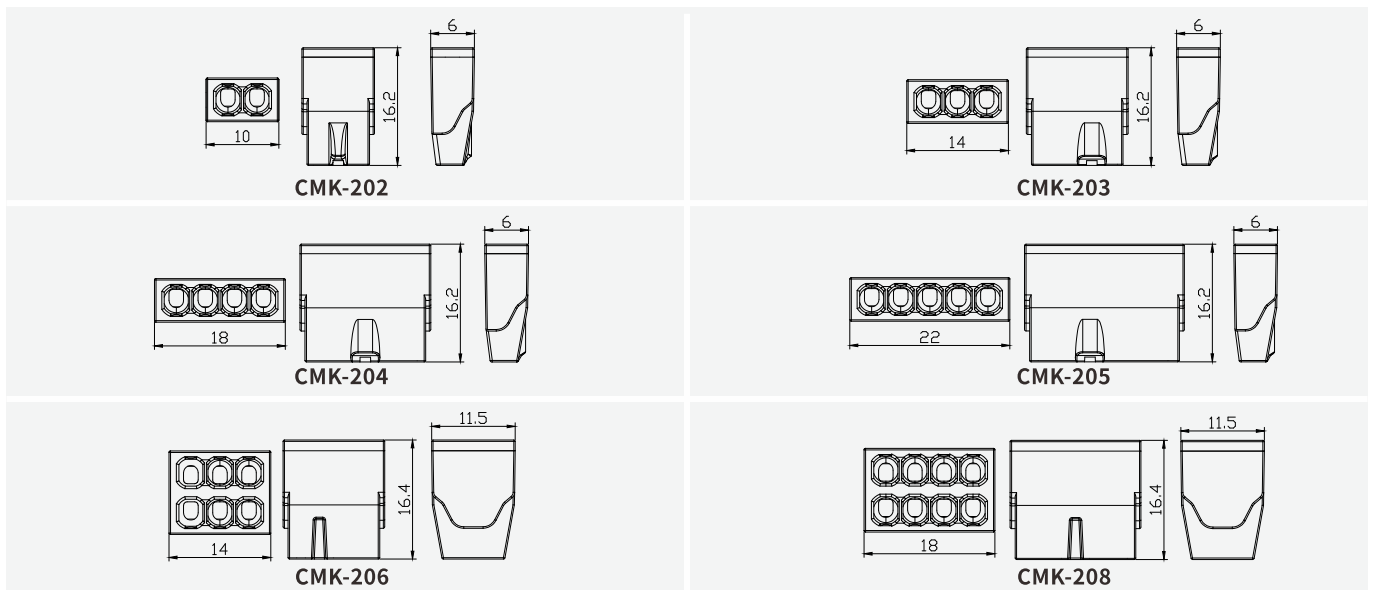



CMK系列快速接线端子
CMK SERIES PUSH IN QUICK-CONNECTORS

Material of connectors shell: Transparent polycarbonate

Material of conductive parts: Thinned copper

Material of contact springs: AISI 301 stainless steel

Rated voltage(V): 450V AC

Rated current(A): 24A

Connection capacity: 0.75-2.5mm²

Type of electric connection: Equipotential

Working temperature: -40°C to 85°C

Strip length: 11mm/0.43 Inch



Product Code	Connector type	No. of circuits	Rigid wire mm ²	Volt (V)	Ampere (A)	Un	Un
CMK-252		2	0.75→2.5	450 V	24 A	100	6000
CMK-253		3				100	5000
CMK-254		4				100	4000
CMK-255		5				100	4000



CMK-252(red)
CMK-252X(grey)




CMK-253(orange)
CMK-253X(grey)




CMK-254(yellow)
CMK-254X(grey)




CMK-255(grey)
CMK-255X(grey)

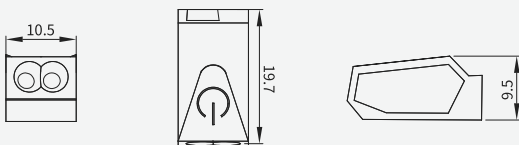


CMK-252

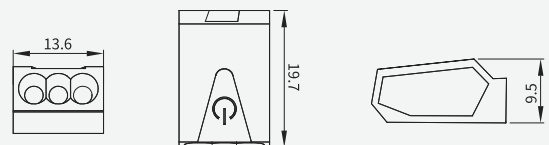


CMK-253

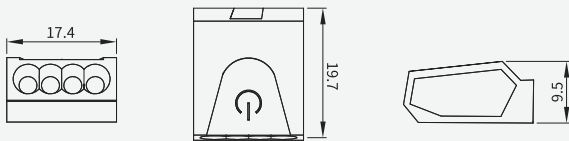

CMK-254

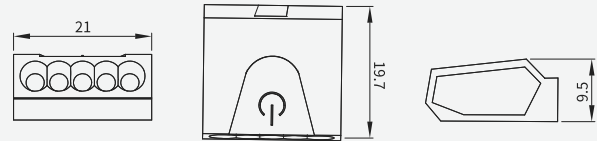

CMK-255

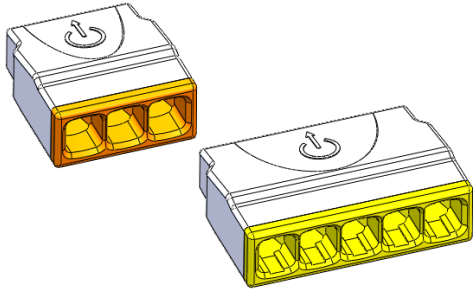

CMK系列快速接线端子
CMK SERIES PUSH IN QUICK-CONNECTORS

Material of connectors shell: Transparent polycarbonate

Material of conductive parts: Thinned copper

Material of contact springs: AISI 301 stainless steel


Type of electric connection: Equipotential

Working temperature: -40°C to 85°C


Strip length: 13mm/0.51 Inch




Product Code	Connector type	No. of circuits	Rigid wire mm ²	Volt (V)	Ampere (A)	Un	Un
CMK-242		2	0.75-4	450 V	32A	150	9000
CMK-243		3				100	6000
CMK-244		4				100	6000
CMK-245		5				100	6000
CMK-246		6				50	3000
CMK-248		8				50	3000




CMK-242




CMK-243



CMK-244



CMK-245



CMK-246



CMK-248

Product Code	Connector type	No. of circuits	Rigid wire mm ²	Volt (V)	Ampere (A)
CMK-173		3	1.5-6	450V	41A
CMK-174		4			