

JHUK系列通用接线端子

JHUK SERIES UNIVERSAL TERMINAL BLOCKS

△概述 General

JHUK 系列组合端子排采用框式螺钉接线结构，设计符合 IEC60947-1、GB14048 等标准，产品用于交流 50Hz(60Hz)，额定电压 660V、直流 440V 以下电路额定截面为 0.75~150mm² 的连接导线，也适用于未经过特殊加工或压接管状端头的圆铜导线连接之用。



JHUK series combined terminal row adopts frame type screw connection structure. The design complies with IEC60947-1, GB14048 standards, which is widely used in the circuit of AC 50Hz(60Hz), rated voltage 660V, DC 40V and below, rated sectional area is 0.75~150mm² connection conductor, it also is suitable for connecting the circle copper conductor of tube terminal that is not specially processed or pressure welding.

△特点 Characteristics


- 1、安装结构设计合理、通用性强，G(┐)型和TH(└)型导轨上都能使用，50mm²以下采用加固附件安装。
- 2、体积小、规格全、可连接导线截面大，导电性好，50mm²以下采用铜制压线框与铜制紧固螺钉，50mm²以上采用钢制压线框与钢螺钉及铜制导热板，拧紧力矩大同时具有自锁功能。
- 3、组合功能强，使导体的连接变得更加简单。
- 1、Reasonable installation structure design, wide general-purpose nature, can be used both G type and TH type guide rail. If it is above 50mm², adopts fasten accessory installation.
- 2、Small volume, complete set of specification, big connected conductor sectional area and good electrical conductivity, the one that is below 50mm² adopts copper press line frame and copper fasten screw; and the one that is above 50mm² adopts copper press line frame and steel screw and copper skirt plate. It has big tighten moment and self-locking function.
- 3、The strong combined function makes the connection of conductor be simpler.

△说明 Explain

(1)端板End cover: 厚度Thickness 1.5mm ² 灰色grey	
(2)中心联接条10, 可任意分割2位3位 10 Center connection-strips, can be divided into 2 position or 3 position.	
(3)带绝缘垫块桥接件: 10位; 可分; 需垫入 Isolator bridge bar: 10-position, divisible need cushion block.	
(4)两端子开关桥: 全套, 需在两端子之间加入板端 Switch bar for 2 terminal blocks complete, add end cover between two terminals.	
(5)隔片: 用于联接件间的电气隔离用 Separating plate: be used for electrical separation of neighbouring brodges.	
(6)分组隔板: 厚度1.5mm Partition plate: 1.5mm Thickness	
(7)通用终端固定件 Unviersal end fixed piece.	

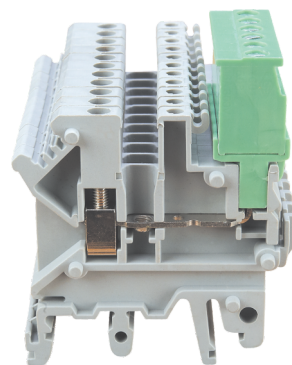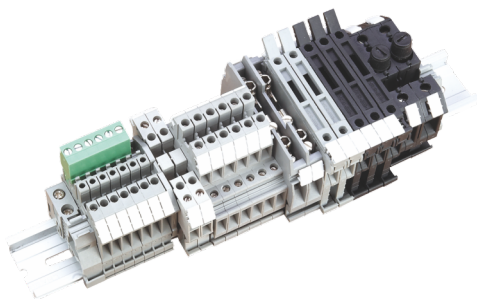


JHUKJ-2.5V

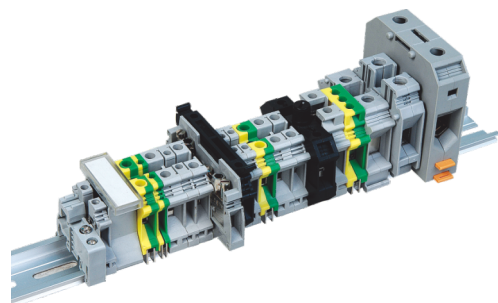

JHUK系列通用接线端子

JHUK SERIES UNIVERSAL TERMINAL BLOCKS



JHUK1.5N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-1.5
电流current: 32A 电压voltage: 690V

D-UK1.5



Fb1 10-4




ZB3



TS-K



E/UK



JHUK2.5B

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-2.5
电流current: 32A 电压voltage: 690V

D-UK2.5



FB1 10-6




ZB6



TS-K



E/UK



JHUK3N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-2.5
电流current: 32A 电压voltage: 800V


D-UK4/10



FB1 10-5




ZB5



TS-K



E/UK



JHUK5N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-6 0.2-4
电流current: 41A 电压voltage: 800V


D-UK4/10



FB1 10-6




ZB6



TS-K



E/UK



JHUK6N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-10 0.2-6
电流current: 57A 电压voltage: 800V

D-UK4/10



FB1 10-8




ZB8



TS-K



E/UK




JHUK10N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.5-16 0.5-10
电流current: 76A 电压voltage: 800V

D-UK4/10



FB1 10-10




ZB10



TS-K



E/UK



JHUK16N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
2.5-25 4-16
电流current: 101A 电压voltage: 800V


D-UK16



FB1 10-16




ZB6*2



TS-K



E/UK



JHUK25N

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
2.5-35 4-25
电流current: 100A 电压voltage: 800V


D-UK25



Fb1 10-25



ZB6*2



TS-K







E/UK









JHUK系列通用接线端子

JHUK SERIES UNIVERSAL TERMINAL BLOCKS

 51 56 厚度thickness:15.3	 78 77.5 厚度thickness:20	 79.5 82 厚度thickness:22.5	 90.5 89 厚度thickness:25.2
JHUK35 刚性导线 (mm²) 柔性导线 Rigidity lead 10-35 flexible lead 10-35 电流current: 125A 电压voltage: 800V FB1 10-35 ZB8*2 E/UK 终端固定件	JHUKH50 刚性导线 (mm²) 柔性导线 Rigidity lead 16-50 flexible lead 25-50 电流current: 150A 电压voltage: 1000V FB1 12-20 (FB1 12-20) FB13-20 (FB13-20) (1)边插式短接件, 2 位 全绝缘, 插入端 3 位 子夹线体并嵌装 3 位 在端子外壳上 铝合金 E/AL-NS 35 (2)终端固定件: 用于JHUK50和70和95和150型端子终端固定。	JHUK70 刚性导线 (mm²) 柔性导线 Rigidity lead 25-70 flexible lead 35-70 电流current: 192A 电压voltage: 1000V FB1 12-20 (FB1 12-20) FB13-20 (FB13-20) (1)边插式短接件, 2 位 全绝缘, 插入端 3 位 子夹线体并嵌装 3 位 在端子外壳上 铝合金 E/AL-NS 35 (2)终端固定件: 用于JHUK50和70和95和150型端子终端固定。	JHUK95 刚性导线 (mm²) 柔性导线 Rigidity lead 25-95 flexible lead 35-95 电流current: 232A 电压voltage: 1000V FB1 12-20 (FB1 12-20) FB13-20 (FB13-20) (1)边插式短接件, 2 位 全绝缘, 插入端 3 位 子夹线体并嵌装 3 位 在端子外壳上 铝合金 E/AL-NS 35 (2)终端固定件: 用于JHUK50和70和95和150型端子终端固定。


JHUK系列通用接地端子

JHUK SERIES CURRENTY EARTHING TERMINAL

 42 42.5 厚度thickness:6.2	 47 42.5 厚度thickness:5.2	 47 42.5 厚度thickness:6.2	 47 42.5 厚度thickness:8.2
JHUSLKG 2.5 刚性导线 (mm²) 柔性导线 Rigidity lead 0.2-4 flexible lead 0.2-2.5 电流current: 32A	JHUSLKG 3 刚性导线 (mm²) 柔性导线 Rigidity lead 0.2-4 flexible lead 0.2-2.5 电流current: 32A	JHUSLKG 5 刚性导线 (mm²) 柔性导线 Rigidity lead 0.2-4 flexible lead 0.2-4 电流current: 34A	JHUSLKG 6 刚性导线 (mm²) 柔性导线 Rigidity lead 0.2-10 flexible lead 0.2-6 电流current: 57A
 47 42.5 厚度thickness:10.2	 47 42.5 厚度thickness:12.2	 51 55 厚度thickness:15.3	 83.5 70.5 厚度thickness:20
JHUSLKG 10 刚性导线 (mm²) 柔性导线 Rigidity lead 0.5-16 flexible lead 0.5-10 电流current: 76A	JHUSLKG 16 刚性导线 (mm²) 柔性导线 Rigidity lead 2.5-25 flexible lead 4-16 电流current: 101A	JHUSLKG 35 刚性导线 (mm²) 柔性导线 Rigidity lead 10-35 flexible lead 10-35 电流current: 125A	JHUSLKG 50 刚性导线 (mm²) 柔性导线 Rigidity lead 25-50 flexible lead 16-50 电流current: 150A 电压voltage: 1000V


JHUK系列通用接线端子

JHUK SERIES UNIVERSAL TERMINAL BLOCKS

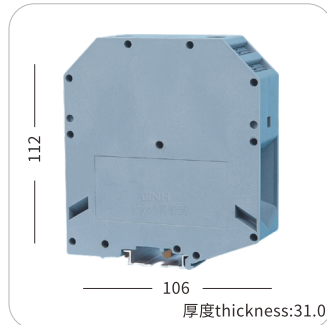


JHUK150

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
35-150 50-150
电压voltage: 1000V 电流current: 309A

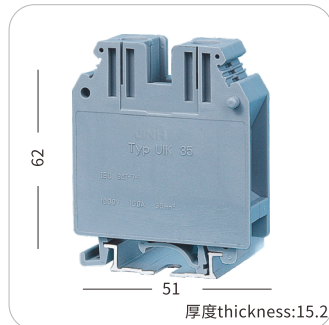


JH2UIK35

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
10-35 0.2-6
电流current: 125A 电压voltage: 800V

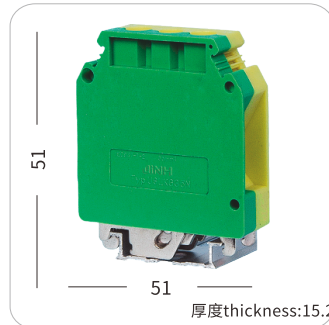


JH2USLKG 35

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
10-35 10-35
电流current: 125A

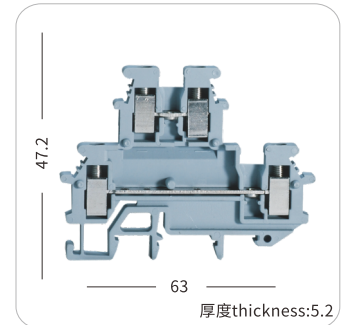

JHUKK 2.5

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-2.5
电流current: 24A 电压voltage: 500V

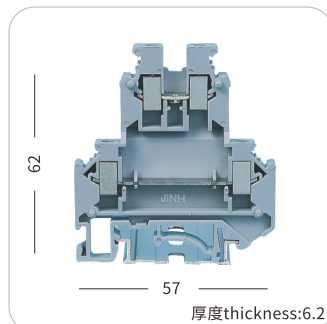


JHUKK 5

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-6 0.2-4
电流current: 41A 电压voltage: 500V

D-UKK5



FB10-6

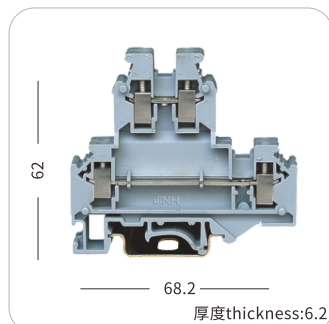


JHUKK 5B

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-6 0.2-4
电流current: 41A 电压voltage: 500V

D-UKK5B



FB10-6

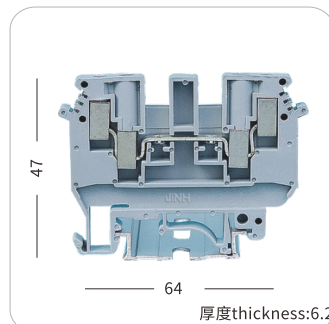


JHUDK 4

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-2.5
电流current: 32A 电压voltage: 690V

D-UDK4



FB10-6



JHURTK/S

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.5-10 0.5-6
电流current: 41A 电压voltage: 400V

D-URTK/S




FB/URTK



JHUDK 5-HESI

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.2-4 0.2-4
电流current: 6.3A 电压voltage: 800V



JHUK 10-DREHSI (UK 10-DREHSI)

刚性导线 (mm²) 柔性导线
Rigidity lead flexible lead
0.5-16 0.5-16
电流current: 10A 电压voltage: 800V



JHUBE/D

宽度(weid): 15mm



JHB1

宽度(weid): 10mm



EUK/B

SAK/JXB 系列组合接线端子

SAK/JXB SERIES COMBINED TERMINAL BLOCKS

△概述 General

SAK/JXB系列组合端子主要是根据德国魏德米勒的联接技术，国内设计制造。技术指标符合IEC60947-1、IEC60947-7-1、GB14048.1标准。其中JXB用于G型和TH导轨的固定安装，增加了大电流端子系列。

SAK/JXB series combined terminal blocks mainly use Germany Woodmiller's connection technology, designed by ourselves and made domestic. Technology targets conforms the standard IEC6094-7-1, OEC 60947-7-1, and GB14048.1. Moreover, JXB Series terminals belong to high current terminals, and they are used in G type and TH type Din Rails.

△特点 Characteristics

- 1、安装设计合理、通用性强，SAK型固定安装G型和TH导轨上都能使用。
- 2、体积小、规格全、JXB系列大电流端子50mm²以上采用加固附件安装钢制压线框和线形导流板技术保证接触可靠。
- 3、基型座颜色采用米黄色和灰色，接地座采用黄绿双色，更具有时代感。
- 1、Reasonable installing design, strong versatility, SAK type can be mounted on the guide of Gand TH type.
- 2、Small volume, full specification, series JXB's big current terminal use reinforced accessoriesto install steel pressing-wire frame and wire diversion board technology in order to ensure the contact reliable.
- 3、The stand uses creamed-yellow and grey color, the connecting-ground pedestal uses yellow and green color with more modern sense.

△说明 Explain

(1)端板(AP): 厚1.5mm 灰色 米色 灰色grey
end voltage/thick1.5mm, grey or cream-color





(2)中心联接件: 10位, 可分2位, 3位, 4位
Center connection piece:10 position,
can be divided into 2, 3 or 4position.




(3)通用终端固定件
Universal end fixed piece



(4)印字连续标记条
Printing number continuous mark stripe

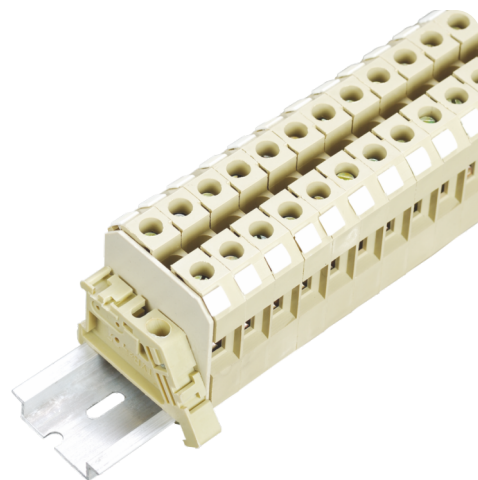


SAK series

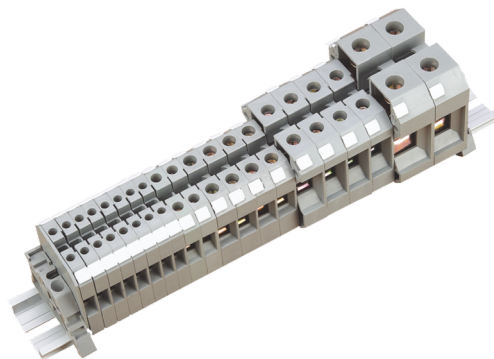

JXB series

SAK 系列组合接线端子


SAK SERIES COMBINED TERMINAL BLOCKS



SAK 2.5EN

0.2-2.5mm²
电流current:24A 电压voltage: 800V
2.5EN
Q2位, 3位, 10位 (2.5Q 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 4EN

0.2-4mm²
电流current:32A 电压voltage: 800V
4EN
Q2位, 3位, 10位 (4ENQ 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 6EN

0.2-6mm²
电流current:41A 电压voltage: 800V
6EN
Q2位, 3位, 10位 (6ENQ 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 10EN

0.2-10mm²
电流current:57A 电压voltage: 800V
10EN
Q2位, 3位, 10位 (10ENQ 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 16EN

0.5-16mm²
电流current:76A 电压voltage: 800V
16EN
Q2位, 3位, 10位 (16ENQ 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 25EN

0.5-25mm²
电流current:100A 电压voltage: 800V
16EN
Q2位, 3位, 10位 (16ENQ 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 35EN

10-35mm²
电流current:125A 电压voltage: 800V
35EN
2位, 3位, 10位 (35ENQ 2-10)
EW35


连续印字 (DEK5(1...10))



SAK 70/35EN

25-70mm²
电流current:192A 电压voltage: 800V
70Q 2位, 3位 (70Q 2位, 3位)
EW35


连续印字 (DEK5(1...10))



SAK RD

0.2-4mm²
电流current:6.3A 电压voltage: 500V
10EN
Q2位, 3位, 10位 (10Q 2-10)
EW35


连续印字 (DEK5(1...10))



DK 4Q/35

0.2-4mm²
电流current:32A 电压voltage: 500V
DK4Q
Q2位, 3位, 10位 (DK4Q 2-10)
EW35

连续印字 (DEK5(1...10))




SAK WTL 6/1

0.2-4mm²
电流current:41A 电压voltage: 400V
WTL2-10位
2位, 3位, 4位, 10位 (WTKQ2-10位)
EW35

连续印字 (DEK5(1...10))

JXB 系列组合接线端子

JXB SERIES COMBINED TERMINAL BLOCKS




通用型universal type 厚度thickness:6.2

JXB 2.5/35 Grey

0.2-2.5mm²
电流current:24A 电压voltage: 800V
2.5EN
Q2位, 3位, 10位 (2.5Q 2-10)
EW35

连续印字 (DEK5(1...10))




通用型universal type 厚度thickness:6.2

JXB 4/35 Grey

0.2-4mm²
电流current:32A 电压voltage: 800V
4EN
Q2位, 3位, 10位 (4ENQ 2-10)
EW35

连续印字 (DEK5(1...10))




通用型universal type 厚度thickness:8

JXB 6/35 Grey

0.2-6mm²
电流current:41A 电压voltage: 800V
6EN
Q2位, 3位, 10位 (6ENQ 2-10)
EW35

连续印字 (DEK5(1...10))




通用型universal type 厚度thickness:10

JXB 10/35 Grey

0.2-10mm²
电流current:57A 电压voltage: 800V
10EN
Q2位, 3位, 10位 (10ENQ 2-10)
EW35

连续印字 (DEK5(1...10))




通用型universal type 厚度thickness:12

JXB 16/35 Grey

0.5-16mm²
电流current:76A 电压voltage: 800V
16EN
Q2位, 3位, 10位 (16ENQ 2-10)
EW35

连续印字 (DEK5(1...10))




通用型universal type 厚度thickness:14.5

JXB 25/35 Grey

0.5-25mm²
电流current:100A 电压voltage: 800V
16EN
Q2位, 3位, 10位 (16ENQ 2-10)
EW35

连续印字 (DEK5(1...10))




通用型universal type 厚度thickness:18

JXB 35/35 Grey

10-35mm²
电流current:125A 电压voltage: 800V
35EN
2位, 3位, 10位 (35ENQ 2-10)
EW35

连续印字 (DEK5(1...10))



通用型universal type 厚度thickness:22

JXB 70/35 Grey


25-70mm²
电流current:192A 电压voltage: 800V
70Q
2位, 3位 (70Q 2位, 3位)
EW35

连续印字 (DEK5(1...10))




JXB 2.5-35 mm²

颜色 Color Green




JXB 2.5-35 mm²

颜色 Color Blue



JXB 2.5-35 mm²

颜色 Color Yellow



JXB 2.5-35 mm²







颜色 Color Red

SAK/JXB系列通用接地端子







SAK/JXB SERIES CONNECTING-GROUND TERMINAL BLOCKS

通用接地端子 UNIVERSAL TERMINAL blocks

·技术参数：额定横截面 Technical parameter: rated section ·颜色：黄绿色 Colour: yellow and green


 40 接地端子 58 connecting ground terminal 厚度thickness:18 EK2.5/35 0.2-2.5mm²	 44 接地端子 58 connecting ground terminal 厚度thickness:7 EK4/35 0.2-4mm²	 44 接地端子 58 connecting ground terminal 厚度thickness:8 EK6/35 0.2-6mm²
 44 接地端子 58 connecting ground terminal 厚度thickness:10 EK 10/35 0.5-10mm²	 50 接地端子 58 connecting ground terminal 厚度thickness:12 EK16/35 0.5-16mm²	 50 接地端子 58 connecting ground terminal 厚度thickness:12 EK35/35 0.5-35mm²

SAK系列端子附件 SAK SERIES TERMINALS ATTALHMENT

 AP2.5	 AP4/10	 AP16	 AP35
 FP1-2.5	 FP1-4	 FP1-6	 FP1-10
 FP1-16	 中心式短接件 P2 P3 center connection piece	 JHEW-35 end stopper	 标记座 mark stand 厚度:9.5、19.5 thickness
			 印刷标记号连续号码 BP1 print mark' continuous Number BP1

JHPT 正面插入式弹簧式接线端子


JHPT PUSH-IN SPRING TYPES TERMINAL BLOCKS

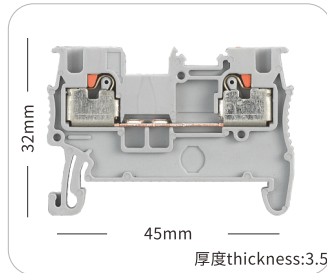

JHPT-1.5

0.14-1.5mm²
电流current:17.5A 电压voltage: 500V
2线一般式接线端子
2 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange


D-PT1.5

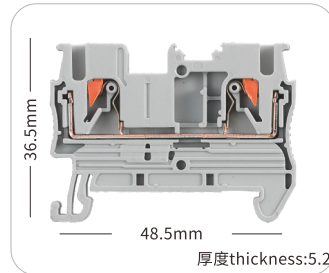

JHPT-2.5

0.14-2.5mm²
电流current:24A 电压voltage: 800V
2线一般式接线端子
2 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange


D-PT2.5

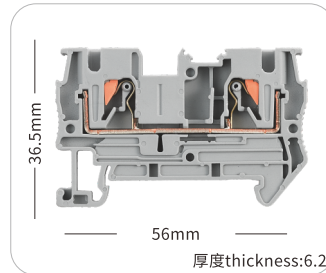

JHPT-4

0.2-4mm²
电流current:32A 电压voltage: 800V
2线一般式接线端子
2 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange


D-PT4

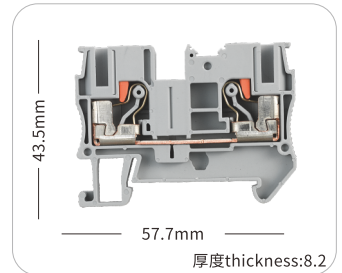

JHPT-6

0.5-6mm²
电流current:41A 电压voltage: 1000V
2线一般式接线端子
2 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange


D-PT6

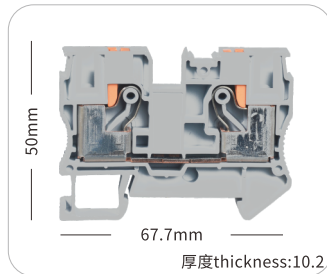

JHPT-10

0.5-10mm²
电流current:51A 电压voltage: 1000V
2线一般式接线端子
2 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange


D-PT10

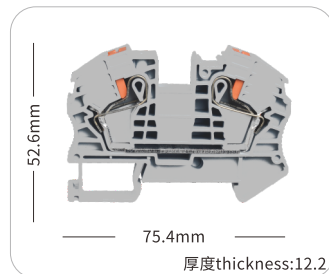

JHPT-16

0.5-16mm²
电流current:76A 电压voltage: 1000V
2线一般式接线端子
2 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange


D-PT16

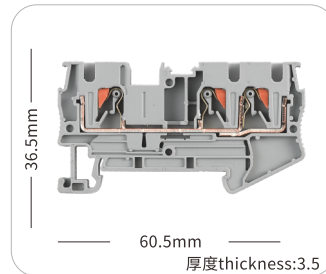

JHPT-1.5TW

0.14-1.5mm²
电流current:24A 电压voltage: 800V
3线一般式接线端子
3 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange


D-PT1.5TW

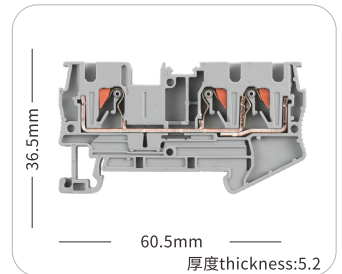

JHPT-2.5TW

0.14-2.5mm²
电流current:24A 电压voltage: 800V
3线一般式接线端子
3 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange


D-PT2.5TW

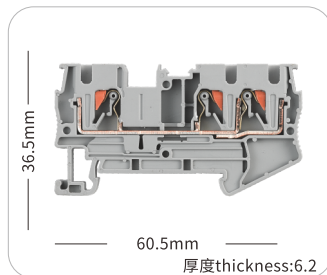

JHPT-4TW

0.2-4mm²
电流current:32A 电压voltage: 800V
3线一般式接线端子
3 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange


D-PT4TW

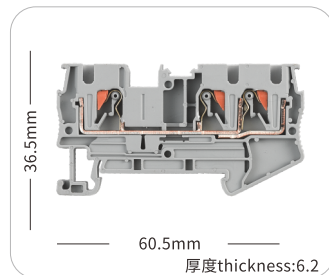

JHPT-TW

6mm²,10mm²,16mm²
3线一般式接线端子
3 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange


D-PT6TW

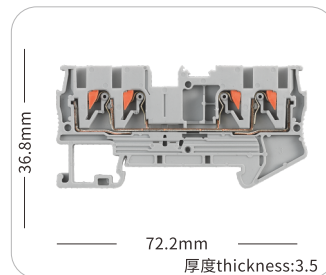

JHPT-1.5QT

0.14-1.5mm²
电流current:32A 电压voltage: 800V
4线一般式接线端子
4 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange

D-PT1.5QT

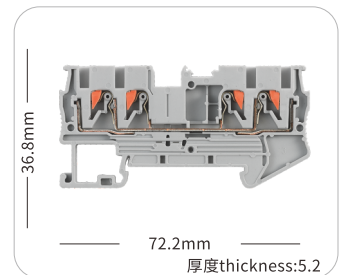

JHPT-2.5QT


0.14-2.5mm²
电流current:32A 电压voltage: 800V
4线一般式接线端子
4 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange

D-PT2.5QT



JHPT 正面插入式弹簧式接线端子

JHPT PUSH-IN SPRING TYPES TERMINAL BLOCKS

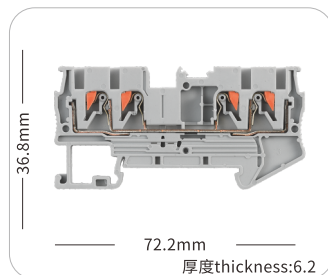


JHPT-4QT

0.2-4mm²
电流current:24A 电压voltage: 800V

4线一般式接线端子
4 general types in lines terminal blocks

颜色: 灰、蓝、橙
Color: grey, blue, orange

D-PT4QT

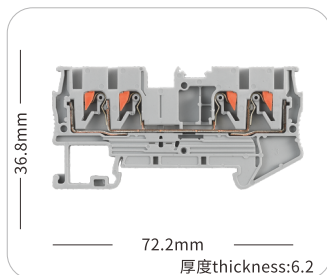


JHPT-6QT

0.5-6mm²
电流current:24A 电压voltage: 800V

4线一般式接线端子
4 general types in lines terminal blocks

颜色: 灰、蓝、橙
Color: grey, blue, orange

D-PT6QT

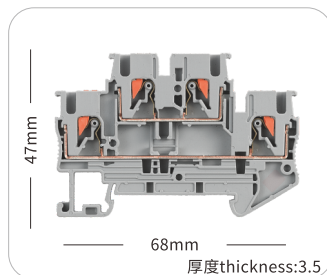


JHPT-1.5TB

0.14-1.5mm²
电流current:22A 电压voltage: 800V

4线一般式接线端子
4 general types in lines terminal blocks

颜色: 灰、蓝、橙
Color: grey, blue, orange

D-PT1.5TB

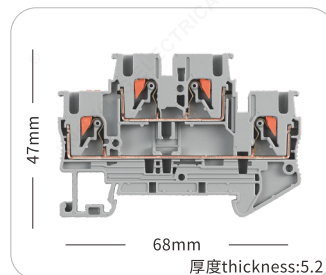


JHPT-2.5TB

0.14-2.5mm²
电流current:22A 电压voltage: 800V

4线一般式接线端子
4 general types in lines terminal blocks

颜色: 灰、蓝、橙
Color: grey, blue, orange

D-PT2.5TB

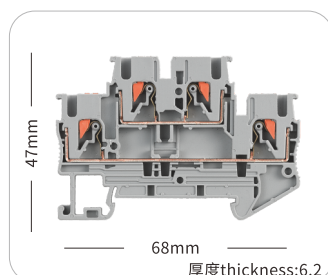


JHPT-4TB

0.2-4mm²
电流current:32A 电压voltage: 800V

4线一般式接线端子
4 general types in lines terminal blocks

颜色: 灰、蓝、橙
Color: grey, blue, orange

D-PT4TB

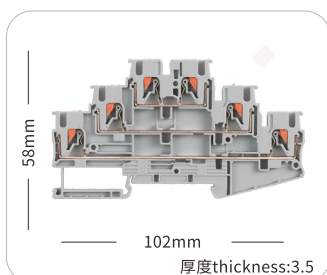


JHPT-1.5-3L

0.14-1.5mm²
电流current:17.5A 电压voltage: 500V

4线一般式接线端子
4 general types in lines terminal blocks

颜色: 灰、蓝、橙
Color: grey, blue, orange

D-PT2.5-3L

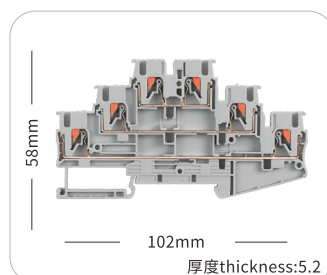


JHPT-2.5-3L

0.14-2.5mm²
电流current:24A 电压voltage: 500V

4线一般式接线端子
4 general types in lines terminal blocks

颜色: 灰、蓝、橙
Color: grey, blue, orange

D-PT2.5-3L

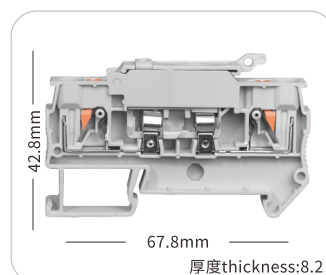


JHPTC-4HESI

0.2-4mm²
电流current:6.3A 电压voltage: 500V

4线一般式接线端子
4 general types in lines terminal blocks

颜色: 灰、黑
Color: grey, black

D-PT4

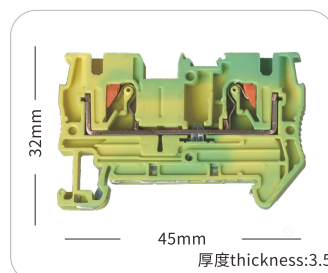


JHPT-1.5PE

0.14-1.5mm²
电流current:17.5A 电压voltage: 500V

2线接地端子
2 lines connecting ground terminal

颜色: 黄绿混色
Color: Yellow green color mixture

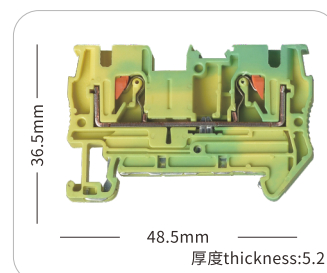


JHPT-2.5PE

0.14-2.5mm²
电流current:24A 电压voltage: 800V

2线接地端子
2 lines connecting ground terminal

颜色: 黄绿混色
Color: Yellow green color mixture

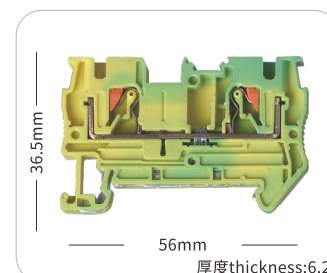


JHPT-4PE

0.2-4mm²
电流current:32A 电压voltage: 800V

2线接地端子
2 lines connecting ground terminal

颜色: 黄绿混色
Color: Yellow green color mixture

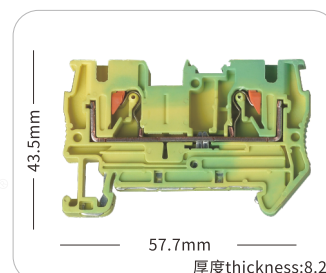

JHPT-6PE


0.5-6mm²
电流current:41A 电压voltage: 1000V

2线接地端子
2 lines connecting ground terminal

颜色: 黄绿混色
Color: Yellow green color mixture


JHPT 正面插入式弹簧式接线端子

JHPT PUSH-IN SPRING TYPES TERMINAL BLOCKS

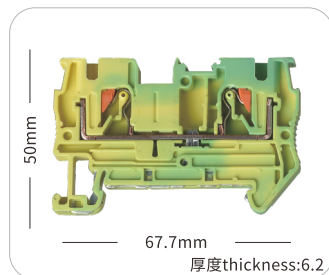


JHPT-10PE

0.5-10mm²
电流current:32A 电压voltage: 800V
2线接地端子
2 lines connecting ground terminal
颜色: 黄绿混色
Color: Yellow green color mixture

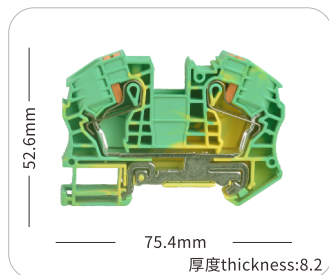


JHPT-16PE

0.5-16mm²
电流current:41A 电压voltage: 1000V
2线接地端子
2 lines connecting ground terminal
颜色: 黄绿混色
Color: Yellow green color mixture

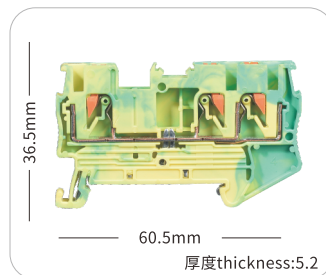


JHPT-TWPE

1.5mm², 2.5mm², 4mm², 6mm², 10mm², 16mm²
3线一般式接线端子
3 general types in lines terminal blocks
颜色: 黄绿混色
Color: Yellow green color mixture

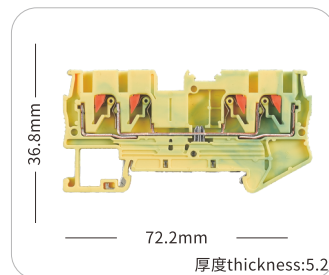


JHPT-QTPE

1.5mm², 2.5mm², 4mm², 6mm²
4线一般式接线端子
4 general types in lines terminal blocks
颜色: 黄绿混色
Color: Yellow green color mixture

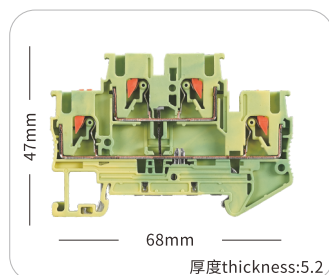


JHPT-TBPE

1.5mm², 2.5mm², 4mm²
4线一般式接线端子
4 general types in lines terminal blocks
颜色: 黄绿混色
Color: Yellow green color mixture

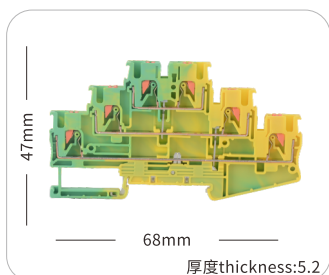


JHPT-3LPE

0.14-2.5mm²
电流current:22A 电压voltage: 800V
2线一般式接线端子
2 general types in lines terminal blocks
颜色: 黄绿混色
Color: Yellow green color mixture

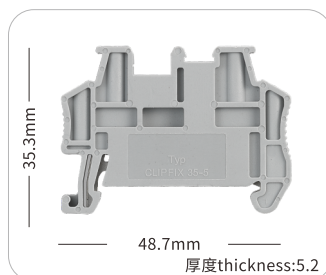

JHPT-35/5

终端固定件
Endstopper
颜色: 灰
Color: grey



E-WA

终端固定件
Endstopper
颜色: 灰
Color: grey



FBS2-3.5	(1.5mm ²)
FBS2-5	(2.5mm ²)
FBS2-6	(4mm ²)
FBS2-8	(6mm ²)
FBS2-10	(10mm ²)

相邻跨接线
Adjacent jumper wire



FBS3-3.5	(1.5mm ²)
FBS3-5	(2.5mm ²)
FBS3-6	(4mm ²)
FBS3-8	(6mm ²)

相邻跨接线
Adjacent jumper wire



FBS5-3.5	(1.5mm ²)
FBS5-5	(2.5mm ²)
FBS5-6	(4mm ²)
FBS5-8	(6mm ²)

相邻跨接线
Adjacent jumper wire




FBS10-3.5	(1.5mm ²)
FBS10-5	(2.5mm ²)
FBS10-6	(4mm ²)
FBS10-8	(6mm ²)

相邻跨接线
Adjacent jumper wire


JHPTV 侧面插入式弹簧式接线端子

JHPT PUSH-IN SPRING TYPES TERMINAL BLOCKS

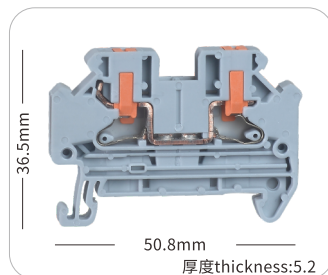


JHPTV-2.5

0.2-4mm²
电流current:24A 电压voltage: 800V
2线一般式接线端子
2 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange

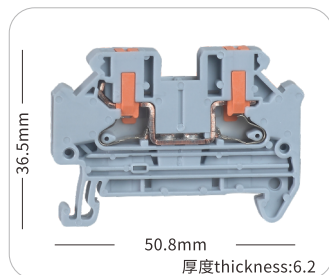


JHPTV-4

0.5-6mm²
电流current:32A 电压voltage: 800V
2线一般式接线端子
2 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange

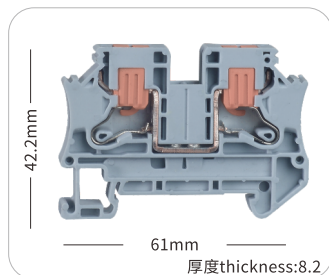


JHPTV-6

0.5-10mm²
电流current:41A 电压voltage: 800V
2线一般式接线端子
2 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange

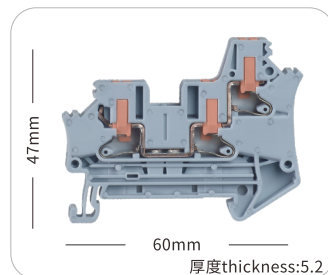


JHPTV-2.5TW

0.14-4mm²
电流current:24A 电压voltage: 800V
3线一般式接线端子
3 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange

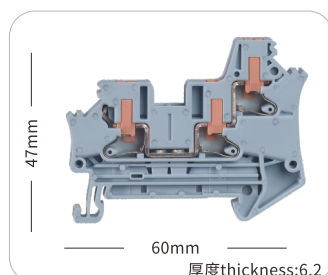


JHPTV-4TW

0.2-6mm²
电流current:32A 电压voltage: 800V
3线一般式接线端子
3 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange




JHPTV-2.5QT

0.14-4mm²
电流current:24A 电压voltage: 800V
4线一般式接线端子
4 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange

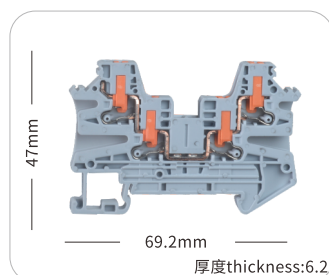


JHPTV-4QT

0.2-6mm²
电流current:32A 电压voltage: 800V
4线一般式接线端子
4 general types in lines terminal blocks
颜色: 灰、蓝、橙
Color: grey, blue, orange

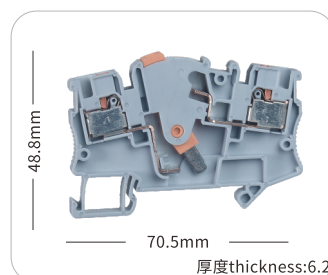


JHPTV-4ME

0.2-6mm²
电流current:24A 电压voltage: 500V
2线一般式接线端子
2 general types in lines terminal blocks
颜色: 灰、黑
Color: grey, black

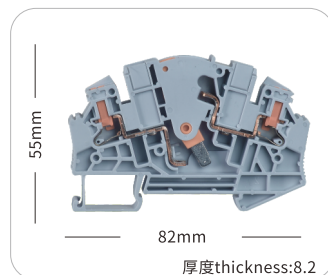


JHPTV-6ME

0.5-6mm²
电流current:32A 电压voltage: 1000V
2线接地端子
2 lines connecting ground terminal
颜色: 黄绿混色
Color: Yellow green color mixture

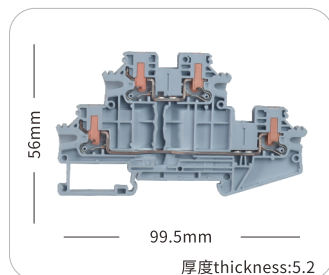


JHPTV-2.5TB

0.5-6mm²
电流current:28A 电压voltage: 8000V
4线接地端子
4 lines connecting ground terminal
颜色: 黄绿混色
Color: Yellow green color mixture

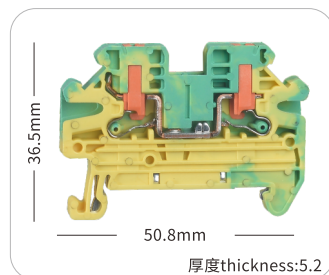

JHPTV-2.5PE



0.14-4mm²
电流current:24A 电压voltage: 800V
2线接地端子
2 lines connecting ground terminal
颜色: 黄绿混色
Color: Yellow green color mixture

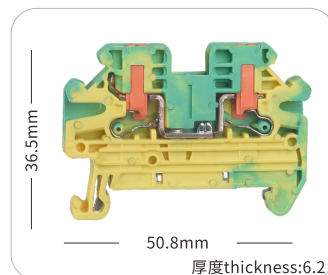

JHPTV-4PE


0.5-6mm²
电流current:32A 电压voltage: 800V
2线接地端子
2 lines connecting ground terminal
颜色: 黄绿混色
Color: Yellow green color mixture

JHPTX 系列分线接线端子 JHPTX SERIES BRANCH TERMINAL BLOCKS

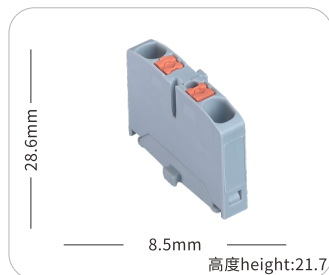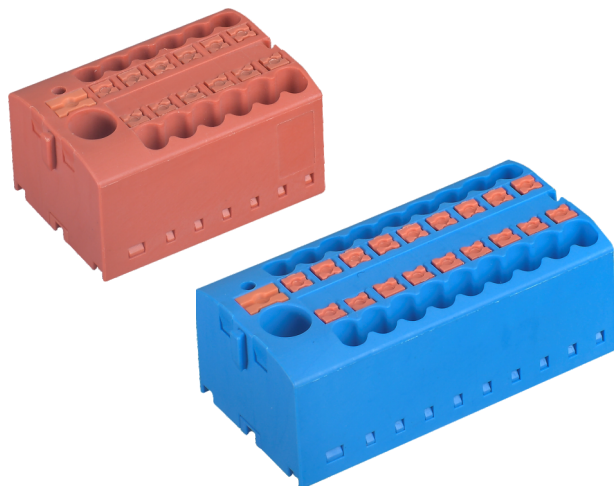


JHPTX-1

0.14-4mm²
电流current:24A 电压voltage: 450V
颜色: 灰、蓝、橙
Color: grey, blue, orange

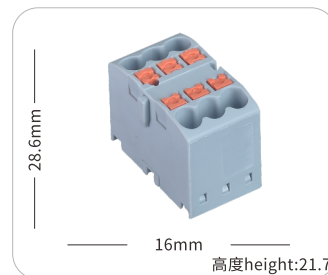


JHPTX-6

0.14-4mm²
电流current:24A 电压voltage: 450V
颜色: 灰、蓝、橙
Color: grey, blue, orange

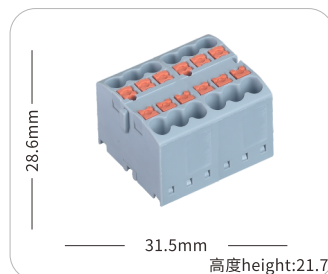



JHPTX-12

0.14-4mm²
电流current:24A 电压voltage: 450V
颜色: 灰、蓝、橙
Color: grey, blue, orange

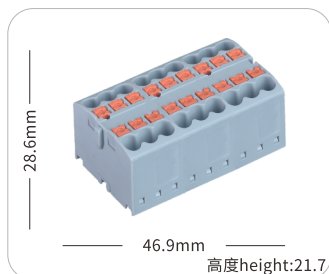


JHPTX-18

0.14-4mm²
电流current:24A 电压voltage: 450V
颜色: 灰、蓝、橙
Color: grey, blue, orange

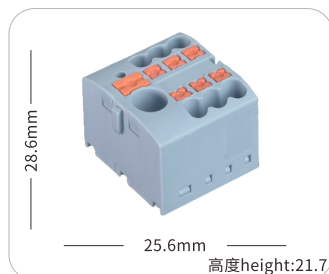



JHPTX6-6

0.5-6mm² 0.14-4mm²
电流current:24A 电压voltage: 690V
颜色: 灰、蓝、橙
Color: grey, blue, orange

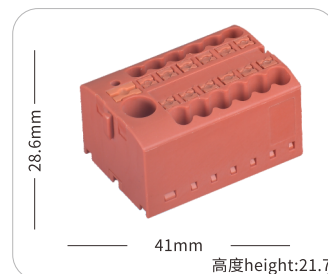


JHPTX6-12

0.5-6mm² 0.14-4mm²
电流current:24A 电压voltage: 690V
颜色: 灰、蓝、橙
Color: grey, blue, orange

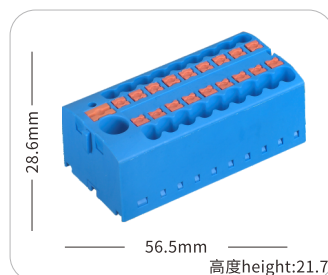

JHPTX6-18

0.5-6mm² 0.14-4mm²
电流current:24A 电压voltage: 690V
颜色: 灰、蓝、橙
Color: grey, blue, orange



JHPTX-F

Screw holder



JHPTX-NS35A

Dinrail bracket

NS35




JHPTX-NS35

Install the base

NS35

JHST 正面接线、弹簧式接线端子

JHST OBVERSE CONNECTION, SPRING TYPES TERMINAL BLOCKS




JHST-1.5

2线一般式接线端子
2 general types in lines terminal blocks

颜色: 灰、兰、橙、红、黑、黄
Color: grey, blue, orange, red, black, yellow

D-ST1.5




JHST-2.5

2线一般式接线端子
2 general types in lines terminal blocks

颜色: 灰、兰、橙、红、黑、黄
Color: grey, blue, orange, red, black, yellow

D-ST2.5




JHST-4

2线一般式接线端子
2 general types in lines terminal blocks

颜色: 灰、兰、橙、红、黑、黄
Color: grey, blue, orange, red, black, yellow

D-ST4




JHST-6

2线一般式接线端子
2 general types in lines terminal blocks

颜色: 灰、兰、橙、红、黑、黄
Color: grey, blue, orange, red, black, yellow

D-ST6




JHST-10

2线一般式接线端子
2 general types in lines terminal blocks

颜色: 灰、兰、橙
Color: grey, blue, orange

D-ST10




JHST-2.5TW

2线一般式接线端子
2 general types in lines terminal blocks

颜色: 灰、兰、橙
Color: grey, blue, orange

D-ST2.5TW




JHST-4TW

2线一般式接线端子
2 general types in lines terminal blocks

颜色: 灰、兰、橙
Color: grey, blue, orange

D-ST4TW




JHST-2.5QT

4线一般式接线端子
4 general types in lines terminal blocks

颜色: 灰、兰、橙
Color: grey, blue, orange

D-ST2.5QT




JHST-4QT

4线一般式接线端子
4 general types in lines terminal blocks

颜色: 灰、兰、橙
Color: grey, blue, orange

D-ST4QT




JHST-2.5TB

2线接双层一般式接线端子
2 general types in lines terminal blocks

颜色: 灰、兰、橙
Color: grey, blue, orange


D-ST2.5TB



JHST-1.5PE

2线接地端子
2 lines connecting ground terminal

颜色: 代号 黄绿混色
Color: type Kelly




JHST-2.5PE

2线接地端子
2 lines connecting ground terminal

颜色: 代号 黄绿混色
Color: type Kelly


JHST 正面接线、弹簧式接线端子

JHST OBVERSE CONNECTION, SPRING TYPES TERMINAL BLOCKS

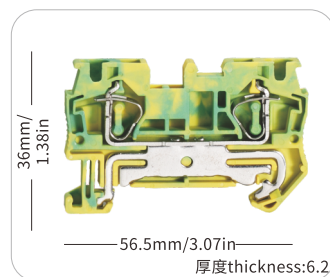


JHST-4PE

2线接地端子
2 lines connecting ground terminal
颜色: 代号 黄绿混色
Color: type Kelly

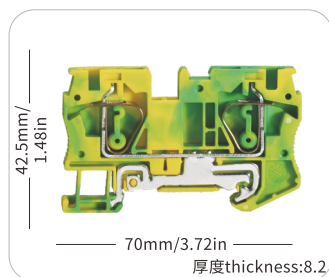


JHST-6PE

2线接地端子
2 lines connecting ground terminal
颜色: 代号 黄绿混色
Color: type Kelly

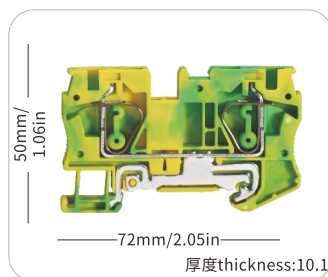


JHST-10PE

2线一般式接线端子
2 general types in lines terminal blocks
颜色: 代号 黄绿混色
Color: type Kelly

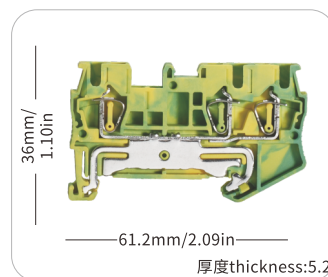


JHST-2.5TWPE

2线一般式接线端子
2 general types in lines terminal blocks
颜色: 代号 黄绿混色
Color: type Kelly

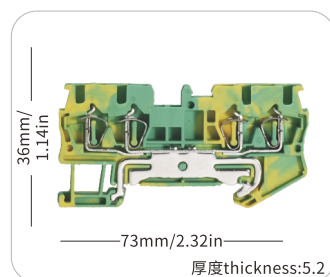


JHST-2.5QWPE

2线一般式接线端子
2 general types in lines terminal blocks
颜色: 代号 黄绿混色
Color: type Kelly

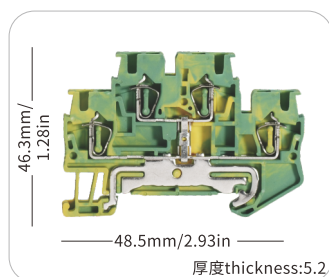

JHST-2.5TBPE

2线一般式接线端子
2 general types in lines terminal blocks
颜色: 代号 黄绿混色
Color: type Kelly

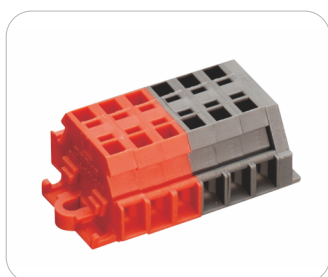


JHN5-1.5

2线一般式接线端子
2 general types in lines terminal blocks
颜色: 灰、兰、橙、红、黑、黄
Color: grey, blue, orange, red, black, yellow



JHN5-2.5

2线一般式接线端子
2 general types in lines terminal blocks
颜色: 灰、兰、橙、红、黑、黄
Color: grey, blue, orange, red, black, yellow



FBS2-4	(1.5mm ²)
FBS2-5	(2.5mm ²)
FBS2-6	(4mm ²)
FBS2-8	(6mm ²)
FBS2-10	(10mm ²)

相邻跨接线
Adjacent jumper wire



FBS3-4	(1.5mm ²)
FBS3-5	(2.5mm ²)
FBS3-6	(4mm ²)
FBS3-8	(6mm ²)

相邻跨接线
Adjacent jumper wire



FBS5-4	(1.5mm ²)
FBS5-5	(2.5mm ²)
FBS5-6	(4mm ²)
FBS5-8	(6mm ²)

相邻跨接线
Adjacent jumper wire



FBS10-4	(1.5mm ²)
FBS10-5	(2.5mm ²)
FBS10-6	(4mm ²)
FBS10-8	(6mm ²)

相邻跨接线
Adjacent jumper wire